

**PRELIMINARY HYDRAULICS REPORT
STRUCTURE O-19-D REPLACEMENT**

**As a part of the
REGION TWO BRIDGE BUNDLE PACKAGE
LAS ANIMAS COUNTY, COLORADO**

A Part of Section 19, Township 31 South, Range 61 West of the 6th P.M.,
County of Las Animas, Colorado

February 19, 2021

Prepared for:

Colorado Department of Transportation
Region 2
5615 Will Blvd.,
Pueblo, CO 81008

Prepared by:



8000 S Chester Street. Suite 500
Centennial, CO 80112
Phone (303) 799-6806
Contact: Joshua Root

TABLE OF CONTENTS

	<u>Page</u>
1. INTRODUCTION -----	1
1.1 Background and Purpose -----	1
1.2 Site Description -----	1
2. HYDROLOGY -----	2
3. EXISTING CONDITIONS -----	3
3.1 Existing Structure-----	3
3.2 Watershed Overview -----	3
3.3 Site Investigation -----	3
4. HYDRAULIC ANALYSIS -----	3
4.1 Debris potential -----	3
4.2 Freeboard -----	4
4.3 Modeling Parameters-----	5
4.4 Model Results -----	6
5. WATER SURFACE ELEVATION ANALYSIS -----	7
6. BRIDGE SCOUR ANALYSIS -----	9
6.1 Scour Overview -----	9
6.2 Site Geology/Geotechnical Information and Impact to Scour Depths-----	9
6.3 Riprap Scour Countermeasures -----	9
7. CONCLUSIONS -----	10
8. REFERENCES -----	12

LIST OF APPENDICES

APPENDIX A FEMA FIRM

APPENDIX B NRCS SOIL SURVEY

APPENDIX C AERIAL IMAGERY AND PHOTOS

APPENDIX D EXISTING CONDITIONS MODEL GRAPHICS

APPENDIX E PROPOSED RCBC ALTERNATIVE MODEL GRAPHICS

APPENDIX F PROPOSED BRIDGE ALTERNATIVE MODEL GRAPHICS

APPENDIX G WATER SURFACE ELEVATION COMPARISON GRAPHICS

APPENDIX H RCBC OUTLET ENERGY DISSIPATION

APPENDIX I GEOTECHNICAL INFORMATION

LIST OF FIGURES

	<u>Page</u>
Figure 1: Vicinity Map-----	2
Figure 2: Flow Chart for Potential Debris Production (FHWA, HEC 20) -----	4

LIST OF TABLES

	<u>Page</u>
Table 1: Summary of Peak Discharge for Bridge O-19-D -----	2
Table 2: Manning’s n-values -----	5
Table 3: Model Boundary Condition Inputs -----	6
Table 4: Existing vs. Proposed RCBC WSE Table -----	8
Table 5: Existing vs. Proposed Bridge WSE Table -----	8

1. INTRODUCTION

1.1 Background and Purpose

The CDOT Region 2 Bridge Bundle Design Build Project consists of the replacement of a total of nineteen (19) structures bundled together as a single project. These structures are rural bridges on essential highway corridors (US 350, US 24, CO 239 and CO 9) in southeastern and central Colorado. These key corridors provide rural mobility, intra- and interstate commerce, movement of agricultural products and supplies, and access to tourist destinations. The design build project consists of seventeen (17) bridges and two (2) Additionally Requested Elements (AREs) structures.

The fourteen (14) of the structures in this design build project are jointly funded by the USDOT FHWA Competitive Highway Bridge Program grant and the Colorado Bridge Enterprise (Project No. 23558). The remaining five (5) structures are funded solely by the Colorado Bridge Enterprise (Project No. 23559). These projects are combined to form one design-build project. The two ARE structures are part of the five bridges funded by the Colorado Bridge Enterprise.

The nineteen bridges identified to be included in the 'Region 2 Bridge Bundle' were selected based on similarities in the bridge conditions, risk factors, site characteristics, and probable replacement type, with the goal of achieving economy of scale. Seventeen of the bridges being replaced are at least 80 years old. Five of the bridges are Load Restricted, limiting trucking routes through major sections of the US 24 and US 350 corridors. The bundle is comprised of nine timber bridges, four concrete box culverts, one corrugated metal pipe (CMP), four concrete I-beam bridges, and one I-beam bridge with corrugated metal deck.

1.2 Site Description

The purpose of this report is to document the preliminary hydraulic analysis and design for the replacement of Structure O-19-D as a part of the CDOT Region 2 Bridge Bundle Design Build. The project is located within Las Animas County at Mile Post 10.287 along US 350 between Trinidad and La Junta. Structure O-19-D crosses over the Lunning Arroyo. Figure 1 below illustrates the project location. The project is located in Section 19, Township 31 South, Range 61 West of the 6th P.M., County of Las Animas, Colorado. **Figure 1** shows the project limits.

The report will document preliminary hydrology, hydraulic, and scour analysis/outlet protection to support the proposed structure replacement design.

The Federal Emergency Management Agency (FEMA) has designated the project site as a FEMA Zone X, as determined by the Flood Insurance Rate Maps (FIRM) 08071C1375C effective date August 28, 2019, as shown in **Appendix A**. FEMA Zone X is an area of minimal flood hazard risk. Since O-19-D is not in a Special Flood Hazard Area (SFHA), this project will meet CDOT and state requirements. For rural, two-lane highways, the design flow for bridges and culverts outside a regulatory floodplain is the 25-year storm event. However, the CDOT DDM requires all non-jurisdictional flood areas to follow Colorado Water Conservation Board's guidelines, which state that any development or construction should not raise the 100-year flood event WSEs more than 0.5'. While this is not a statewide requirement, best practice is to follow these guidelines. Bridge O-19-D falls into the 25-year design category, but because the existing structure passes the 100-year flows, the proposed structures has been sized accordingly.



Figure 1: Vicinity Map

2. HYDROLOGY

Preliminary hydrology for the watershed tributary to this structure was provided by CDOT. A memorandum provided by CDOT has been provided that summarizes basin areas, runoff methodology and approximate flowrates derived from the preliminary analysis. Table 1 is a summary of the approximate flowrates provided by CDOT of structure O-19-D.

Table 1: Summary of Peak Discharge for Bridge O-19-D

River Location	Design Storm	25-year (cfs)	100-year (cfs)	200-year (cfs)	500-year (cfs)
Upstream of Bridge	25-year	544	845	1,017	1,266

3. EXISTING CONDITIONS

3.1 Existing Structure

The existing bridge is a three-span treated timber stringer bridge built in 1937 to span the Lunning Arroyo. The bridge is tangent. The existing bridges were based on a CDOT Standard P-117-B-H. The existing bridge consist of three 23'-0" spans and a width of 29'-0" curb to curb, 30'-0" out to out of deck between rails. The existing vertical clearance varies from 5'-6" to 11'-0". The existing bridge has 14 rows of stringers, 6"x20" wood stringers, spaced at 2'-3 1/4". The deck consists of wood planks, 3"x6".

3.2 Watershed Overview

The Lunning Arroyo is a dry arroyo that flows from the west to the east. The watershed tributary to Lunning Arroyo is approximately 0.75 square miles in area. The watershed generally slopes to the east. The stream bed does not have a base flow. The Lunning Arroyo is tributary to the Purgatoire River. The arroyo combines with the river about 4.25 miles downstream of the US 350 crossing.

The stream flows at an approximate angle of attack of 90 degrees to the existing structure. The area surrounding the bridge is rural with undeveloped land to both upstream and downstream sides of the bridge.

Upstream of the roadway bridge, approximately 125 feet to the west, the channel crosses under the railroad. The bridge for the railroad is a six span, wooden bridge.

3.3 Site Investigation

A site investigation by Stanley Consultants in August 2020 was performed to gain an understanding of the key hydraulic and geomorphic features of the stream at the project site and of the overall watershed. This investigation found obvious water staining throughout the timber structure and core rot on several piles. Site investigation also found 2 feet of sub-abutment exposure at the south abutment where flows cut a channel in span 1. Site photos are included in **Appendix C**.

4. HYDRAULIC ANALYSIS

A two-dimensional (2D) hydraulic model was developed using the Sediment and River Hydraulics 2D model (SRH-2D) software developed by the USBR in 2008. A 2D model was chosen to represent this area due to the complexity of the stream and for the preliminary scour countermeasure design. The Surface Water Modeling System (SMS) was used to develop the inputs for the SRH-2D Version 13.0 model, as well as post-process the results. For this analysis, three models were developed:

- Existing Conditions
- Proposed Conditions: Bridge Replacement
- Proposed Conditions: Box Culvert Replacement

4.1 Debris potential

The potential for debris production and delivery is estimated to be low (minimal) based on guidance from Federal Highway Administration (FHWA) Hydraulic Engineering Circular (HEC)

No. 20. The flowchart for potential debris production is presented in Figure 2. The channel banks near the bridge are vegetated with tall grasses and shrubs, and very few trees are present in the channel both upstream and downstream of the existing structure, as confirmed with the site visit in August, 2020. Aerial imagery of the watershed near the bridge is shown in Appendix C.

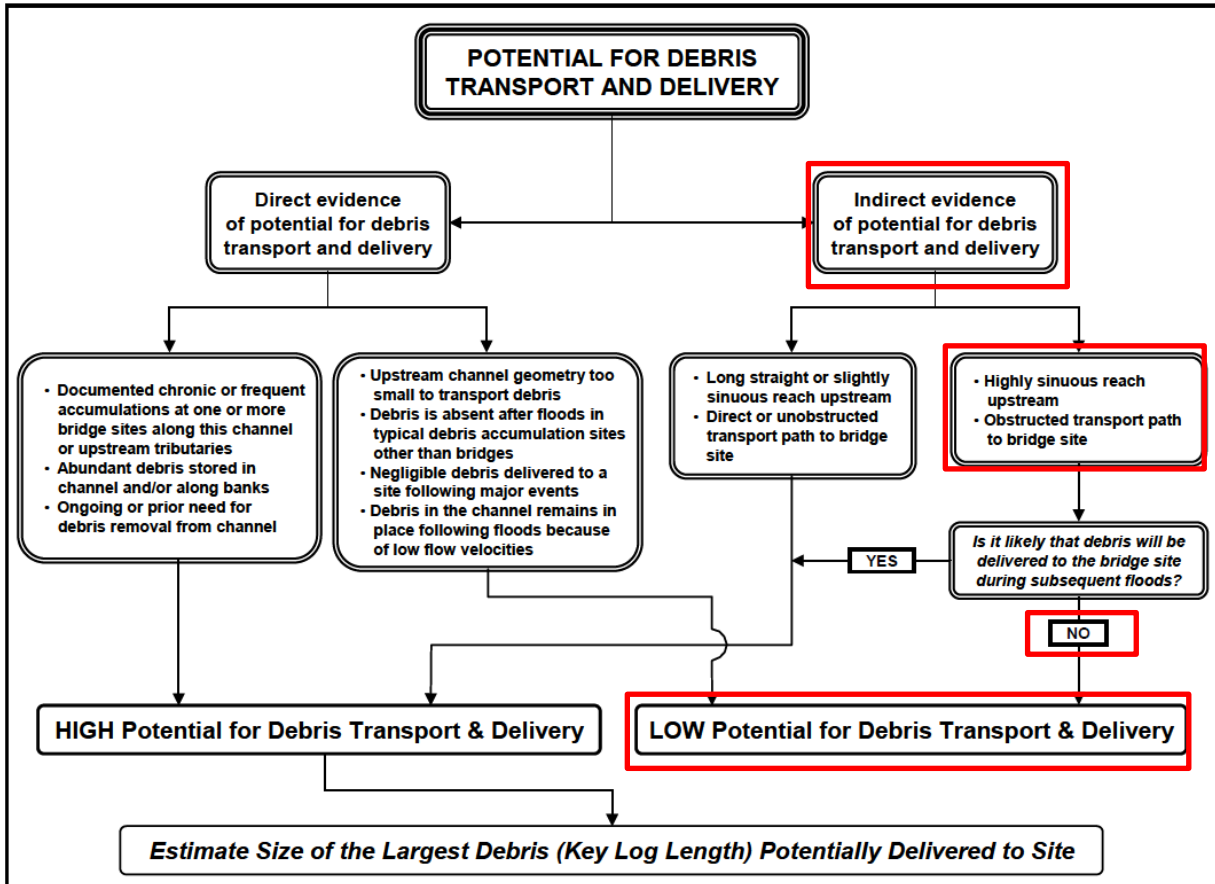


Figure 2: Flow Chart for Potential Debris Production (FHWA, HEC 20)

4.2 Freeboard

The CDOT Drainage Design Manual (2019) specifies freeboard requirements for all bridges. Freeboard is the minimum clearance between the design approach WSE and the low chord of the bridge. It is a factor of safety that acts as a buffer to account for unknown factors that could increase the height of the calculated WSE. Streams classified as high debris streams shall have a minimum of 4 feet of freeboard. Low-to-moderated streams CDOT highly encourages 2 feet be provided, where practical. The elevation of the water surface 50 to 100 feet upstream of the face of the bridge shall be the elevation to which the freeboard is added to get the bottom or low-girder elevation of the bridge.

The channel was not identified as having a high potential for debris production. Therefore, if a bridge is selected for the proposed conveyance structure, 2 feet of freeboard will typically be required. As discussed below, the existing water surface elevation at the bridge is 1.34 feet

below the low chord of the bridge. The proposed bridge option preliminary design provides 2.02 feet of freeboard, which does meet the 2' minimum.

4.3 Modeling Parameters

4.3.1 Elevation Data

Existing conditions survey for the bridge and channel cross sections was performed by CDOT in June, 2020. LiDAR was acquired by CDOT in October, 2020. These two data sources were combined for the modeling elevation surface.

A local, custom projection was used for the data collection in the existing conditions survey. The survey was converted into NAD 1983 Colorado State Plane South US Survey Feet for the hydraulic modeling. All elevations are referenced to NAVD 88 (feet).

4.3.2 Computational Mesh

The computational mesh is an unstructured mesh, which allows for the use of triangles and quadrilaterals, with variable element sizes. Roadways, railroads, and the channel used quadrilaterals, with the face lined up perpendicular to flow. Triangles were typically used in the floodplain. The total number of mesh elements is 9,419 and the mesh extends approximately 285 feet upstream of the bridge and 240 feet downstream of the bridge.

4.3.3 Surface Roughness

Surface roughness, represented by the Manning's roughness coefficient, is presented in Table 2. A Manning's n-value was assigned to each land use based on aerial imagery, topography, a site visit in August, 2020, and engineering judgment. Photos from the site visit used to confirm the n-values selected are shown in **Appendix C**, and a map showing existing conditions materials coverages is shown in **Appendix D**.

Table 2: Manning's n-values

Land Use	n-value
Channel	0.035
Overbanks	0.075
Railroad/Gavel	0.035
Paved Road	0.016
Open Space	0.055

4.3.4 Boundary Conditions

The boundary conditions include a steady state inflow and a normal depth calculated outflow.

The peak flows developed in Table 1 were used to develop a steady-state inflow boundary condition. The inflow boundary condition extends the full length of the inundation boundary in the upstream portion of the project location. The model was set to a dry initial condition.

For the downstream boundary condition, the subcritical outflow option was selected. This outflow condition uses the inputs of anticipated flow, Manning's n-value, channel slope, and

terrain data to determine the outflow constant water surface elevation. Table 3 presents the boundary condition values.

Table 3: Model Boundary Condition Inputs

Frequency Storm	Inflow (cfs)	Outflow Constant WSE (ft)
100-Year	845.0	5672.8

4.3.5 Hydraulic Structures

The modeled existing bridge geometry is based on the survey completed in August, 2020. The survey data included shots detailing the bridge, including the existing pier locations. The high chord of the bridge is 5681.36 feet while the low chord is 5678.36 feet.

The existing bridge piers were modeled as holes in the computational mesh, allowing flow to run around the piers which replicated true hydraulic conditions.

4.3.6 Simulation Control

The hydraulic simulations are run with a 1.0 second time step for 1 hour until a steady state solution is met. The parabolic turbulence method is used with a coefficient of 0.7.

4.4 Model Results

4.4.1 Existing Conditions

The range of depths experienced in the channel at the bridge during the 100-year event is from 0 feet to 8.96 feet. **Appendix D** presents the depth for the stream as the flows move through the bridge.

4.4.2 Alternatives Analysis

An alternatives/risk analysis was completed in the preliminary design process to determine the most feasible options for the hydraulic conveyance structure. Both a bridge and reinforced concrete box culvert (RCBC) option were analyzed. Many factors were taken into consideration when determining the preferred alternative for this preliminary analysis. These factors included cost, constructability, effects on the stream hydraulics, environmental impacts, among others.

Proposed RCBC

This option was modeled using the same SRH-2D model as was used for the existing conditions. Modifications to the model included removal of the existing bridge piers from the mesh and the inclusion of the proposed RCBC design. The proposed model has 9,308 mesh elements. HY-8 was used to model the proposed box culvert due to the flow being perpendicular to the roadway.

A similar opening size was used for the box culverts to keep the WSEs the same or lower than existing conditions. The preliminary model shows the proposed culvert being 43 feet in length. The RCBC option for this structure required a 1 cell 20-foot wide by 10-foot tall structure. This structure size was determined to allow zero rise in the WSEs of the channel.

The headwater depth to culvert height ratio (HW/D) for this structure must be below 1.5 to meet CDOT culvert criteria. The HW/D for this culvert is 0.66 with a headwater elevation of 6.65' at the culvert entrance.

Depths and velocity grids for the proposed RCBC show depths from 0.0 to 8.24 and velocities from 0.0 to 16.14. See **Appendix E** for 100-year depths and velocities graphics for this option.

Proposed Bridge

This option was modeled using the same SRH-2D model as was used for the existing conditions. Modifications to the model included removal of the existing bridge piers from the mesh and the inclusion of the proposed bridge piers. The proposed model has 9,364 mesh elements. The proposed model has a 48-foot span width, the low chord of the bridge is at 5678.36 elevation, and the high chord didn't change from the existing condition. This structure size shows a 0.32-foot decrease in the WSE upstream of the bridge and an approximate WSE increase of about 0.01-0.02 feet downstream of the bridge.

Depths and velocity grids for the proposed bridge show depths from 0.0 to 9.00 and velocities from 0.0 to 19.04. See **Appendix F** for 100-year depths and velocities graphics for this option.

5. WATER SURFACE ELEVATION ANALYSIS

FEMA has designated the project site as a Zone X, as determined by the FIRM #08071C1375C effective date August 28, 2019, as shown in **Appendix A**. FEMA Zone X is an area of minimal flood hazard risk. Since O-19-D is not in a Special Flood Hazard Area (SFHA), this project will meet CDOT and state requirements. For rural, two-lane highways, the design flow for bridges and culverts outside a regulatory floodplain is the 25-year storm event. However, the CDOT DDM requires all non-jurisdictional flood areas to follow Colorado Water Conservation Board's guidelines, which state that any development or construction should not raise the 100-year flood event WSEs more than 0.5'. While this is not a statewide requirement, best practice is to follow these guidelines. Bridge O-19-D falls into the 25-year design category, but because the existing structure passes the 100-year flows, the proposed structures has been sized accordingly.

Proposed RCBC

Based on modeling results, the proposed RCBC will not increase the WSE by more than 0.5 feet. Because the opening of the proposed RCBC is about the same as the existing opening, no significant change in WSE is expected, with a decrease seen immediately upstream of the RCBC opening.

In order to perform a comparison between the existing and proposed WSEs, 14 cross sections were cut across the 2D hydraulic model results both upstream and downstream of the proposed bridge. The average WSE was determined for both existing and the proposed RCBC option, as shown in **Appendix G**. The WSE comparison at these sections is shown in Table 4.

Proposed Bridge

Similarly, the model for the proposed bridge will not increase the WSE by more than 0.5 feet. The bridge opening for this option is very similar to the existing structure. Therefore, no significant change in WSE is expected.

For the proposed bridge, upstream of Bridge O-19-D (Cross Sections 1-8), the WSE decreases between 0.01 feet and 0.32 feet between existing and proposed. Downstream of Bridge O-19-D (Cross Sections 9-14), the WSE increases a maximum of 0.02 feet between existing and proposed. **Appendix G** shows the cross sections used for the proposed bridge option as well as the floodplain limit changes between existing and proposed for this scenario. Table 5 also shows a WSE comparison at each section for the proposed bridge option.

Table 4: Existing vs. Proposed RCBC WSE Table

Cross Section	Location Relative to Proposed Bridge	Existing WSE (ft)	Proposed WSE (ft)	PR vs EX*
1	Upstream	5679.75	5678.79	-0.96
2	Upstream	5679.68	5678.65	-1.03
3	Upstream	5679.02	5678.14	-0.89
4	Upstream	5678.64	5677.89	-0.75
5	Upstream	5678.44	5677.74	-0.70
6	Upstream	5677.77	5677.33	-0.45
7	Upstream	5677.02	5676.89	-0.13
8	Upstream	5676.66	5676.62	-0.04
9	Downstream	5675.83	5675.28	-0.55
10	Downstream	5675.05	5674.86	-0.19
11	Downstream	5674.42	5673.85	-0.57
12	Downstream	5673.97	5673.30	-0.67
13	Downstream	5673.38	5673.05	-0.32
14	Downstream	5672.85	5672.63	-0.21

*Proposed-Existing

Table 5: Existing vs. Proposed Bridge WSE Table

Cross Section	Location Relative to Proposed Bridge	Existing WSE (ft)	Proposed WSE (ft)	PR vs EX*
1	Upstream	5679.75	5679.74	-0.01
2	Upstream	5679.68	5679.67	-0.01
3	Upstream	5679.02	5679.00	-0.02
4	Upstream	5678.64	5678.62	-0.02
5	Upstream	5678.44	5678.41	-0.03
6	Upstream	5677.77	5677.70	-0.07
7	Upstream	5677.02	5676.75	-0.27
8	Upstream	5676.66	5676.34	-0.32
9	Downstream	5675.83	5675.72	-0.11
10	Downstream	5675.05	5675.07	0.02
11	Downstream	5674.42	5674.43	0.01
12	Downstream	5673.97	5673.98	0.01
13	Downstream	5673.38	5673.39	0.01
14	Downstream	5672.85	5672.85	0.00

*Proposed-Existing

6. BRIDGE SCOUR ANALYSIS

6.1 Scour Overview

For the proposed bridge option as determined in the alternatives analysis, a scour analysis was estimated for Lunning Arroyo at the bridge. The scour analysis is typically intended to inform the structural design of the crossing and countermeasure design. The FHWA recommends that bridges with complex flow characteristics use a 2D model to represent hydraulic conditions.

For the scour analysis approximation, the results from a similar bridge within the project were used. For that bridge's scour analysis, the FHWA Hydraulic Toolbox Version 4.4 software program was used. The Hydraulic Toolbox program uses equations presented in the FHWA Hydraulic Engineering Circular No. 18 Evaluation of Scour at Bridges (HEC-18) and the National Cooperative Highway Research Program (NCHRP) 24-20. SRH-2D was used as the hydraulic model platform and it has the capability to extract the data needed for these calculations directly from the model.

Based on Table 2.1 from HEC-18 and the conditions of the bridge, the 100-year event is used as the hydraulic design flood frequency, the 200-year event results are used as the scour design flood frequency, and the 500-year results are used as the scour design check flood frequency.

At the project site, the following scour components were calculated:

- Contraction Scour
- Abutment Scour
- Long-Term Degradation

6.2 Site Geology/Geotechnical Information and Impact to Scour Depths

A geotechnical analysis was completed by Yeh and Associates for the Project. Gradation of the stream bed was provided in this investigation and used for this preliminary scour analysis. Only one sample was taken from the channel, therefore this sample will be applied to abutment (local) scour, contraction scour and long-term degradation. Results from the geotechnical investigation is provided in **Appendix H**.

Borings at each abutment and one at each bridge approach, were also conducted as part of the field exploration. These were used to better understand subsurface conditions at the bridge crossing. Soils information from borings were not used in the scour analysis because boring samples at the abutments were assumed to not be as representative of channel bed conditions as the channel sample discussed above.

Because exact bedrock elevations are not known, no adjustment was made to the scour depths shown below.

6.3 Riprap Scour Countermeasures

The proposed bridge foundations will be designed to withstand the effects of scour up to and including the 500-year Scour Design Check Flood Frequency. Scour countermeasures will be

designed to protect the approach roadway and bridge embankments from the effects of scour for the 100-year Hydraulic Design Flood Frequency.

Vertical wall abutments with wing walls and riprap are recommended as scour countermeasures. The abutment and wing walls shall be designed with a toe wall extending down to the 100-yr scour depth. The FHWA Hydraulic Toolbox Version 4.4 (FHWA, 2018) was used to size riprap at the ends of the proposed wing walls and along the roadway embankment. The riprap was sized for the 100-year hydraulic design event. The Hydraulic Toolbox applies methodology outlined in the FHWA Hydraulic Engineering Circular No. 23 Bridge Scour and Stream Instability Countermeasures: Experience, Selection, and Design Guidance (HEC-23) for sizing riprap at abutments based on abutment type, set-back ratio, Froude number, specific gravity of rock riprap, and a characteristic velocity in the channel.

The approximate results are summarized herein. For the right (north) abutment, a riprap with D50 of 24-inches (in) (Class 6 per HEC-23) is recommended. The resulting recommended thickness is 48-in based on HEC-23 for Class 6 riprap. For the left (south) abutment, a riprap with D50 of 18-inches (in) (Class 5 per HEC-23) is recommended. The resulting recommended thickness is 36-in based on HEC-23 for Class 5 riprap. Refer to Table 506-2 of CDOT's Division 500 Structures Specifications for the required gradation.

Riprap shall also be placed over a Class 1, non-woven geotextile filter material. According to CDOT's Division 700 Materials Details, geotextile materials should be selected from the New York Department of Transportation's Approved Products List of Geosynthetic materials that meet the National Transportation Product Evaluation Program (NTPEP) and AASHTO M-288 testing requirements. Class 1 geotextiles is the only class approved for applications related to slope protection.

The riprap slope protection at each wing wall should extend approximately 25' from the end of the wing walls along the roadway embankment. Riprap placed below existing grade shall be constructed with a maximum 2:1 side slope. Riprap above grade will be placed at the roadway embankment slope and no steeper than 2:1.

7. CONCLUSIONS

This report presents preliminary analysis and results from the hydrologic and hydraulic study for the Region 2 Bridge Bundle Design Build – Bridge O-19-D. This report documents preliminary analysis in determining costs for proposed structure replacement at this location. It also includes preliminary water surface elevation analysis and scour analysis.

A two-dimensional model was developed to analyze the flows through the existing bridge and compare the WSEs and velocities to the proposed design. This model was utilized to optimize the proposed solution to replacement of the existing bridge.

Based on the hydraulic analysis, the proposed replacement for this bridge is a single-span 48-foot span length bridge. The proposed freeboard is 2 feet and the proposed WSE 100 feet upstream of the proposed bridge is 5674.34 feet, giving a final recommended bridge low chord of 5676.34 feet. The proposed low chord is 5678.36 which with 2.02-feet of freeboard does meet the 2 feet minimum requirement.


Floodplain analysis demonstrates that the proposed bridge opening will cause a maximum of 0.02-foot rise in flood levels during the 100-year design event.

Total design scour for the bridge abutments was estimated to be approximately 6-feet at the 500-year design event. This accounts for the contraction scour and long-term degradation impacts that could potentially affect the proposed bridge abutments. Vertical wall abutments with wing walls and riprap are recommended as scour countermeasures.

8. REFERENCES

1. “Colorado Department of Transportation Drainage Design Manual”, Colorado Department of Transportation, 2019.
2. Mile High Flood District, Urban Storm Drainage Criteria Manual (USDCM), Volumes I, II, and III, August 2018.
3. “Hydraulic Engineering Circular No. 18 – Evaluating Scour at Bridges Fifth Edition”. U.S. Department of Transportation Federal Highway Administration, April 2012.
4. “Hydraulic Engineering Circular No. 20 – Stream Stability at Highway Structures”. U.S. Department of Transportation Federal Highway Administration, April 2012.
5. “Hydraulic Engineering Circular No. 23 – Bridge Scour and Stream Instability Countermeasures: Experience, Selection, and Design Guidance – Third Edition,” U.S. Department of Transportation, Federal Highway Administration, September 2009.
6. CDOT Region 2 2D Quick Check Hydrology Summary Report and Matrix, Colorado Department of Transportation, 2020.

APPENDIX A FEMA FIRM

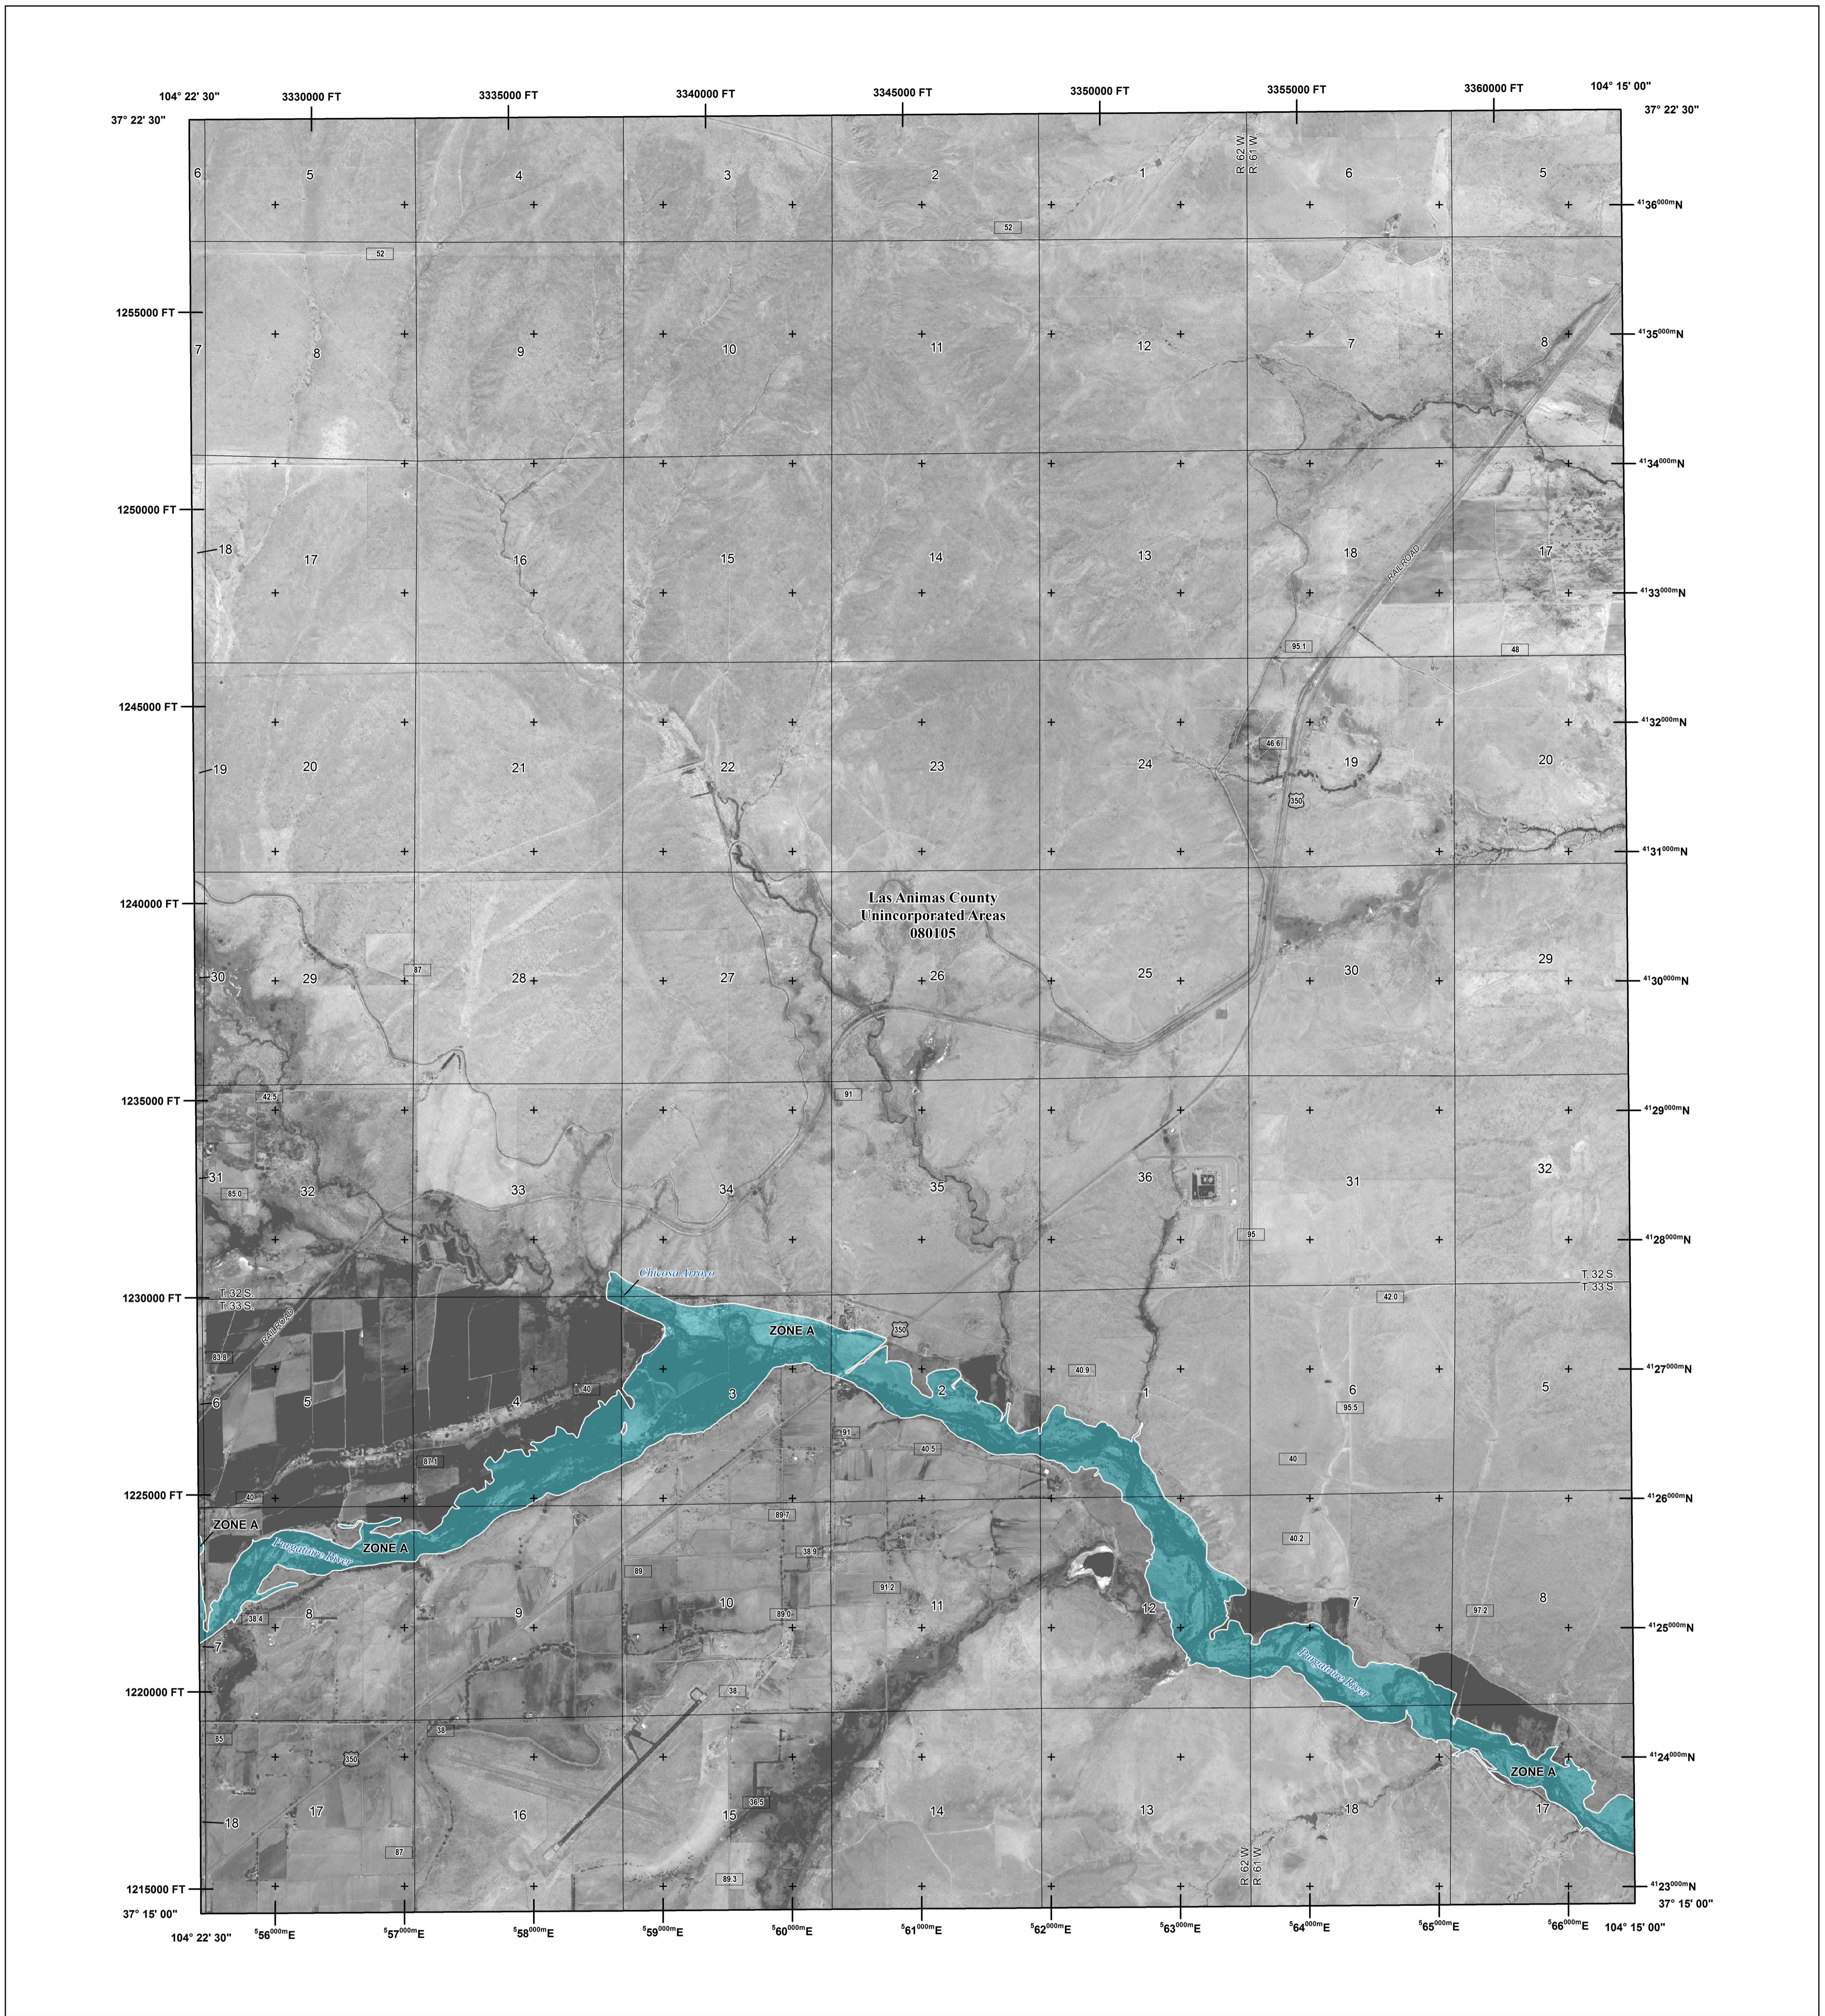

FLOOD HAZARD INFORMATION

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT. THE INFORMATION DEPICTED ON THIS MAP AND SUPPORTING DOCUMENTATION ARE ALSO AVAILABLE IN DIGITAL FORMAT AT [HTTPS://MSC.FEMA.GOV](https://MSC.FEMA.GOV)

	Without Base Flood Elevation (BFE) Zone A, V, A99
	With BFE or Depth Zone AE, AO, AH, VE, AR
	Regulatory Floodway
	0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile Zone X
	Future Conditions 1% Annual Chance Flood Hazard Zone X
	Area with Reduced Flood Risk due to Levee See Notes. Zone X
	Areas Determined to be Outside the 0.2% Annual Chance Floodplain Zone X
	Area of Undetermined Flood Hazard Zone D
	Channel, Culvert, or Storm Sewer
	Levee, Dike, or Floodwall
	Cross Sections with 1% Annual Chance Water Surface Elevation (BFE)
	Coastal Transect
	Coastal Transect Baseline
	Profile Baseline
	Hydrographic Feature
	Base Flood Elevation Line (BFE)
	Limit of Study
	Jurisdiction Boundary

NOTES TO USERS

For information and questions about this map, available products associated with this FIRM including historic versions of this FIRM, how to order products or the National Flood Insurance Program in general, please call the FEMA Map Information Exchange at 1-877-FEMA-MAP (1-877-336-2627) or visit the FEMA Map Service Center website at <https://msc.fema.gov>. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. Many of these products can be ordered or obtained directly from the website. Users may determine the current map date for each FIRM panel by visiting the FEMA Map Service Center website or by calling the FEMA Map Information Exchange.


Communities annexing land on adjacent FIRM panels must obtain a current copy of the adjacent panel as well as the current FIRM index. These may be ordered directly from the Map Service Center at the number listed above.

To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.


For community and countywide map dates refer to the Flood Insurance Study report for this jurisdiction.

Base map information shown on the FIRM was provided in digital format by the Las Animas County GIS Department, the U.S. Geological Survey and the Natural Resources Conservation Service. The digital orthophotography was collected by the U.S. Department of Agriculture Farm Service Agency. The U.S. Department of Agriculture Farm Service Agency imagery was flown in 2013 and was produced with a 1-meter ground sample.

SCALE

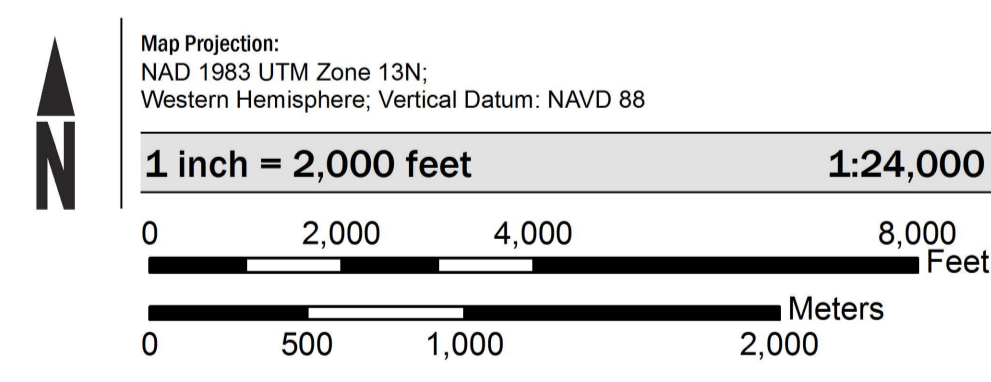

PANEL LOCATOR

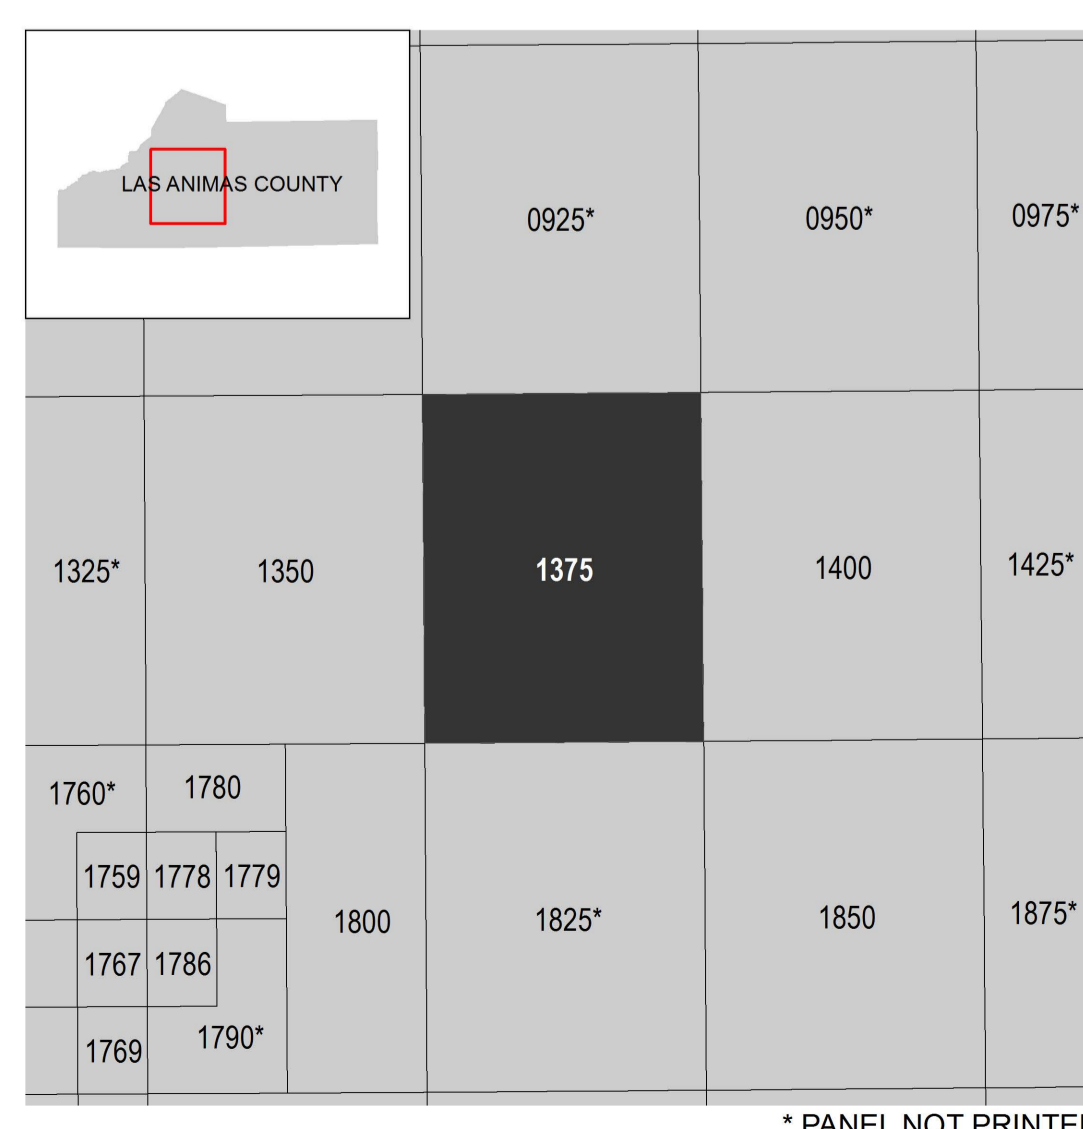

**NATIONAL FLOOD INSURANCE PROGRAM
FLOOD INSURANCE RATE MAP**

LAS ANIMAS COUNTY, COLORADO and Incorporated Areas
PANEL 1375 of 2975



Panel Contains:

COMMUNITY	NUMBER	PANEL	SUFFIX
LAS ANIMAS COUNTY	080105	1375	C

VERSION NUMBER 2.3.3.3
MAP NUMBER 08071C1375C
EFFECTIVE DATE AUGUST 28, 2019

* PANEL NOT PRINTED

APPENDIX B NRCS SOIL SURVEY

Custom Soil Resource Report for Las Animas County Area, Colorado, Parts of Huerfano and Las Animas Counties



Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

Preface	2
How Soil Surveys Are Made	5
Soil Map	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	12
Map Unit Descriptions.....	12
Las Animas County Area, Colorado, Parts of Huerfano and Las Animas Counties.....	14
AvC—Aguilar silt loam, 2 to 5 percent slopes, gullied.....	14
HvA—Haversid loam, 0 to 3 percent slopes, rarely flooded.....	15
ShD—Shingle-Penrose complex, 2 to 15 percent slopes.....	17
References	20

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and


Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

Custom Soil Resource Report Soil Map

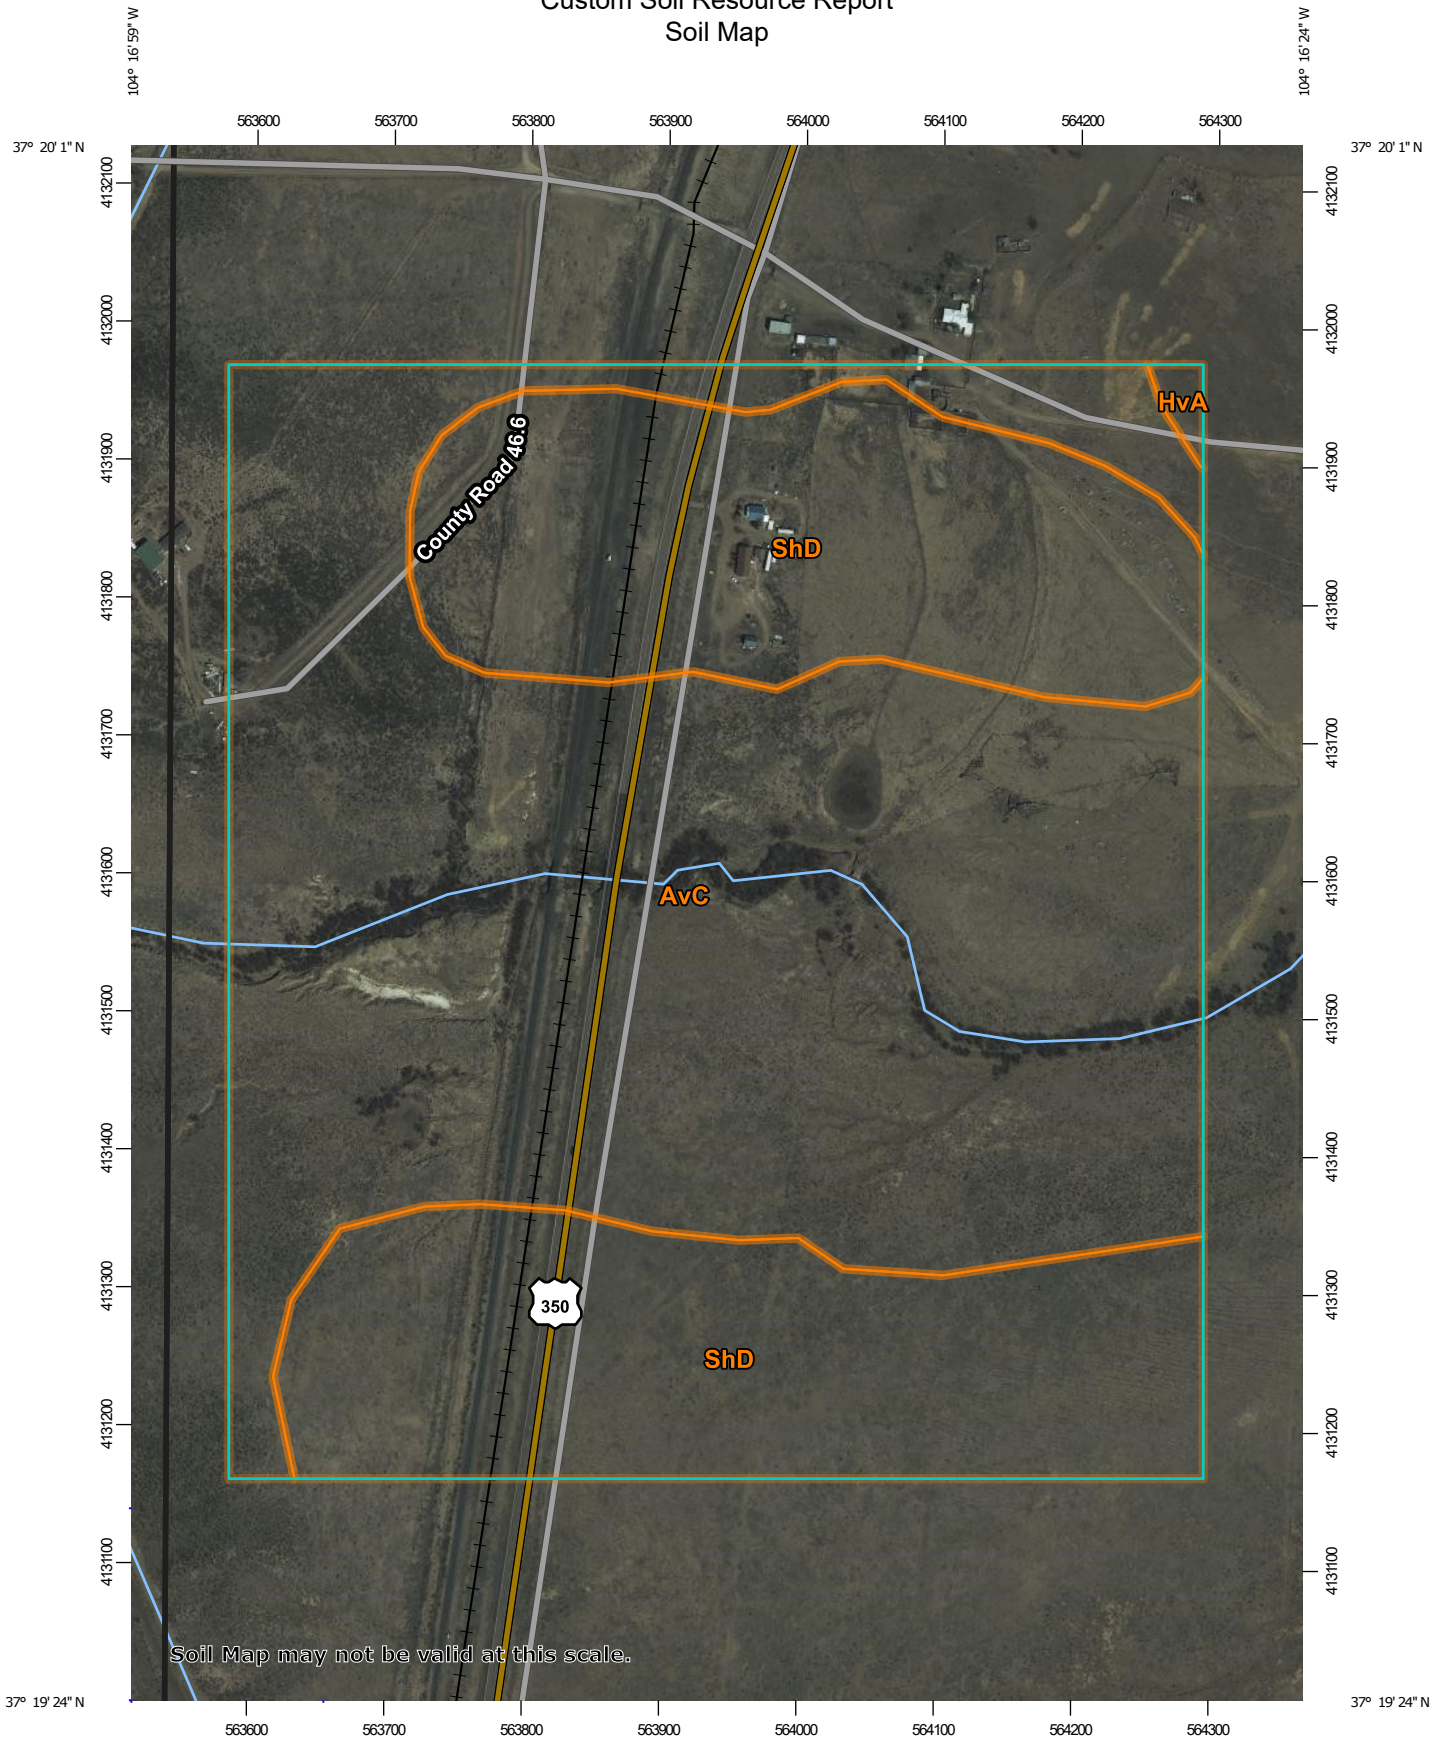

Soil Map may not be valid at this scale.



Map Scale: 1:5,500 if printed on A portrait (8.5" x 11") sheet.

0 50 100 200 300 Meters

0 250 500 1000 1500 Feet

Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 13N WGS84

MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)

Soils

 Soil Map Unit Polygons

 Soil Map Unit Lines



 Soil Map Unit Points

Special Point Features


-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot

-  Spoil Area
-  Stony Spot
-  Very Stony Spot
-  Wet Spot
-  Other
-  Special Line Features





Political Features

-  PLSS Township and Range
-  PLSS Section

Water Features

-  Streams and Canals

Transportation

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

Background

-  Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
 Web Soil Survey URL:
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Las Animas County Area, Colorado, Parts of Huerfano and Las Animas Counties
 Survey Area Data: Version 23, Jun 5, 2020

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Mar 31, 2020—May 18, 2020

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background

MAP LEGEND

MAP INFORMATION

imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
AvC	Aguilar silt loam, 2 to 5 percent slopes, gullied	86.3	60.8%
HvA	Haversid loam, 0 to 3 percent slopes, rarely flooded	0.4	0.3%
ShD	Shingle-Penrose complex, 2 to 15 percent slopes	55.3	38.9%
Totals for Area of Interest		142.1	100.0%

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or

Custom Soil Resource Report

landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Las Animas County Area, Colorado, Parts of Huerfano and Las Animas Counties

AvC—Aguilar silt loam, 2 to 5 percent slopes, gullied

Map Unit Setting

National map unit symbol: 3jn1
Elevation: 5,000 to 6,100 feet
Mean annual precipitation: 12 to 15 inches
Mean annual air temperature: 49 to 53 degrees F
Frost-free period: 125 to 155 days
Farmland classification: Not prime farmland

Map Unit Composition

Aguilar, gullied, and similar soils: 90 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Aguilar, Gullied

Setting

Landform: Fans, plains
Landform position (two-dimensional): Backslope, footslope
Landform position (three-dimensional): Rise
Down-slope shape: Linear
Across-slope shape: Convex
Parent material: Clayey alluvium

Typical profile

E - 0 to 6 inches: silt loam
Btn - 6 to 14 inches: clay
Btkny - 14 to 28 inches: silty clay
Btny - 28 to 41 inches: silty clay loam
Bny - 41 to 65 inches: silty clay loam

Properties and qualities

Slope: 2 to 5 percent
Depth to restrictive feature: 2 to 7 inches to natric
Drainage class: Well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.06 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 5 percent
Gypsum, maximum content: 5 percent
Maximum salinity: Moderately saline to strongly saline (12.0 to 20.0 mmhos/cm)
Sodium adsorption ratio, maximum: 35.0
Available water capacity: Very low (about 1.1 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 6s
Hydrologic Soil Group: D

Custom Soil Resource Report

Ecological site: R069XY047CO - Alkaline Plains LRU's A & B
Forage suitability group: Sodic, Sodic/Saline (G069XW027CO)
Other vegetative classification: Sodic, Sodic/Saline (G069XW027CO), Alkaline Plains #47 (069XY047CO_2)
Hydric soil rating: No

Minor Components

Razor

Percent of map unit: 5 percent
Landform: Pediments, hills
Landform position (two-dimensional): Backslope, shoulder
Landform position (three-dimensional): Side slope, head slope, rise
Down-slope shape: Linear
Across-slope shape: Convex
Ecological site: R069XY042CO - Clayey Plains LRU's A & B
Other vegetative classification: Clayey, Dry-Saline (G069XW006CO), CLAYEY PLAINS (069AY042CO)
Hydric soil rating: No

Bloom

Percent of map unit: 5 percent
Landform: Drainageways, terraces
Landform position (three-dimensional): Tread, dip
Down-slope shape: Concave
Across-slope shape: Linear
Ecological site: R069XY030CO - Salt Meadow LRU's A & B
Other vegetative classification: Subirrigated, Moderately Saline (G069XW032CO), Salt Meadow #30 (069XY030CO_2)
Hydric soil rating: Yes

HvA—Haversid loam, 0 to 3 percent slopes, rarely flooded

Map Unit Setting

National map unit symbol: 2tqym
Elevation: 3,400 to 6,300 feet
Mean annual precipitation: 10 to 14 inches
Mean annual air temperature: 48 to 54 degrees F
Frost-free period: 130 to 170 days
Farmland classification: Prime farmland if irrigated

Map Unit Composition

Haversid, rarely flooded, and similar soils: 90 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Haversid, Rarely Flooded

Setting

Landform: Flood-plain steps, flood plains

Custom Soil Resource Report

Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Alluvium

Typical profile

A - 0 to 6 inches: loam
Bw - 6 to 42 inches: loam
C - 42 to 79 inches: silt loam

Properties and qualities

Slope: 0 to 3 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Well drained
Runoff class: Low
Capacity of the most limiting layer to transmit water (Ksat): Moderately high to high
(0.60 to 2.00 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: Rare
Frequency of ponding: None
Calcium carbonate, maximum content: 10 percent
Maximum salinity: Slightly saline (4.0 to 7.9 mmhos/cm)
Available water capacity: High (about 9.4 inches)

Interpretive groups

Land capability classification (irrigated): 4s
Land capability classification (nonirrigated): 4s
Hydrologic Soil Group: B
Ecological site: R069XY037CO - Saline Overflow LRU's A & B
Hydric soil rating: No

Minor Components

Limon, rarely flooded

Percent of map unit: 5 percent
Landform: Flood plains
Landform position (three-dimensional): Tread
Down-slope shape: Linear
Across-slope shape: Linear
Ecological site: R069XY033CO - Salt Flat LRU's A & B
Other vegetative classification: Clayey, Moderately Saline (G069XW008CO), Salt
Flat #33 (069AY033CO_2)
Hydric soil rating: No

Glenberg, rarely flooded

Percent of map unit: 5 percent
Landform: Flood plains, flood-plain steps
Down-slope shape: Linear
Across-slope shape: Linear
Ecological site: R069XY031CO - Sandy Bottomland LRU's A & B
Hydric soil rating: No

ShD—Shingle-Penrose complex, 2 to 15 percent slopes

Map Unit Setting

National map unit symbol: 3jq4
Elevation: 4,500 to 6,500 feet
Mean annual precipitation: 12 to 16 inches
Mean annual air temperature: 50 to 53 degrees F
Frost-free period: 130 to 155 days
Farmland classification: Not prime farmland

Map Unit Composition

Shingle and similar soils: 65 percent
Penrose and similar soils: 23 percent
Minor components: 12 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Shingle

Setting

Landform: Hills, pediments
Landform position (two-dimensional): Backslope, shoulder
Landform position (three-dimensional): Side slope, head slope, rise
Down-slope shape: Convex
Across-slope shape: Linear
Parent material: Slope alluvium over residuum weathered from gypsiferous shale

Typical profile

A - 0 to 4 inches: clay loam
C - 4 to 11 inches: clay loam
Cr - 11 to 60 inches: bedrock

Properties and qualities

Slope: 2 to 15 percent
Depth to restrictive feature: 10 to 20 inches to paralithic bedrock
Drainage class: Well drained
Runoff class: High
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 15 percent
Gypsum, maximum content: 5 percent
Maximum salinity: Nonsaline to slightly saline (0.0 to 4.0 mmhos/cm)
Sodium adsorption ratio, maximum: 4.0
Available water capacity: Very low (about 1.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 7s

Custom Soil Resource Report

Hydrologic Soil Group: D
Ecological site: R069XY046CO - Shaly Plains LRU's A & B
Forage suitability group: Needs Field Review (G069XW050CO)
Other vegetative classification: Needs Field Review (G069XW050CO), Shaly Plains #46 (069XY046CO_2)
Hydric soil rating: No

Description of Penrose

Setting

Landform: Scarps
Landform position (two-dimensional): Summit, backslope, shoulder
Landform position (three-dimensional): Crest
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Slope alluvium over residuum weathered from limestone

Typical profile

A - 0 to 5 inches: loam
AC - 5 to 9 inches: loam
C - 9 to 15 inches: channery loam
R - 15 to 26 inches: bedrock

Properties and qualities

Slope: 2 to 15 percent
Depth to restrictive feature: 10 to 20 inches to lithic bedrock
Drainage class: Well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 75 percent
Gypsum, maximum content: 1 percent
Maximum salinity: Nonsaline to slightly saline (0.0 to 4.0 mmhos/cm)
Sodium adsorption ratio, maximum: 5.0
Available water capacity: Very low (about 2.4 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 6s
Hydrologic Soil Group: D
Ecological site: R069XY058CO - Limestone Breaks LRU's A & B
Forage suitability group: Needs Field Review (G069XW050CO)
Other vegetative classification: Needs Field Review (G069XW050CO), Limestone Breaks #58 (069XY058CO_2)
Hydric soil rating: No

Minor Components

Midway, moist

Percent of map unit: 5 percent
Landform: Hills, pediments
Landform position (two-dimensional): Backslope, shoulder, summit
Landform position (three-dimensional): Side slope, head slope, rise
Down-slope shape: Linear

Custom Soil Resource Report

Across-slope shape: Convex

Ecological site: R069XY046CO - Shaly Plains LRU's A & B

Other vegetative classification: Needs Field Review (G069XW050CO), Shaly Plains #45 (067XY045CO_4)

Hydric soil rating: No

Minnequa

Percent of map unit: 5 percent

Landform: Pediments, plains

Landform position (two-dimensional): Backslope, shoulder

Landform position (three-dimensional): Rise

Down-slope shape: Linear

Across-slope shape: Linear

Ecological site: R069XY006CO - Loamy Plains, LRU's A & B 10-14 Inches, P.Z.

Other vegetative classification: Loamy, Limy (G069XW022CO), Loamy Plains #6 (069XY006CO_2)

Hydric soil rating: No

Rock outcrop

Percent of map unit: 2 percent

Landform: Scarps

Hydric soil rating: No

References

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf

APPENDIX C AERIAL IMAGERY AND PHOTOS



CDOT REGION 2 – BRIDGE BUNDLE



EXISTING BRIDGE STRUCTURE SHOWING WATER STAINING AND CUT CHANNEL
STRUCTURE O-19-D
FIGURE 1



CDOT REGION 2 – BRIDGE BUNDLE

WATER STAINING ON EXISTING ABUTMENT
STRUCTURE O-19-D
FIGURE 2





CDOT REGION 2 – BRIDGE BUNDLE

AERIAL IMAGE OF BRIDGE WITH RAILROAD TO WEST
STRUCTURE O-19-D
FIGURE 3






CDOT REGION 2 – BRIDGE BUNDLE

EXISTING CHANNEL CONDITIONS NEAR BRIDGE
STRUCTURE O-19-D
FIGURE 4



APPENDIX D EXISTING CONDITIONS MODEL GRAPHICS





CDOT REGION 2 – BRIDGE BUNDLE

EXISTING CONDITIONS 100-YEAR DEPTH RESULTS
STRUCTURE O-19-D
FIGURE 2




APPENDIX E PROPOSED RCBC ALTERNATIVE MODEL GRAPHICS




CDOT REGION 2 – BRIDGE BUNDLE



PROPOSED RCBC CONDITIONS 100-YEAR DEPTH RESULTS
STRUCTURE O-19-D
FIGURE 1

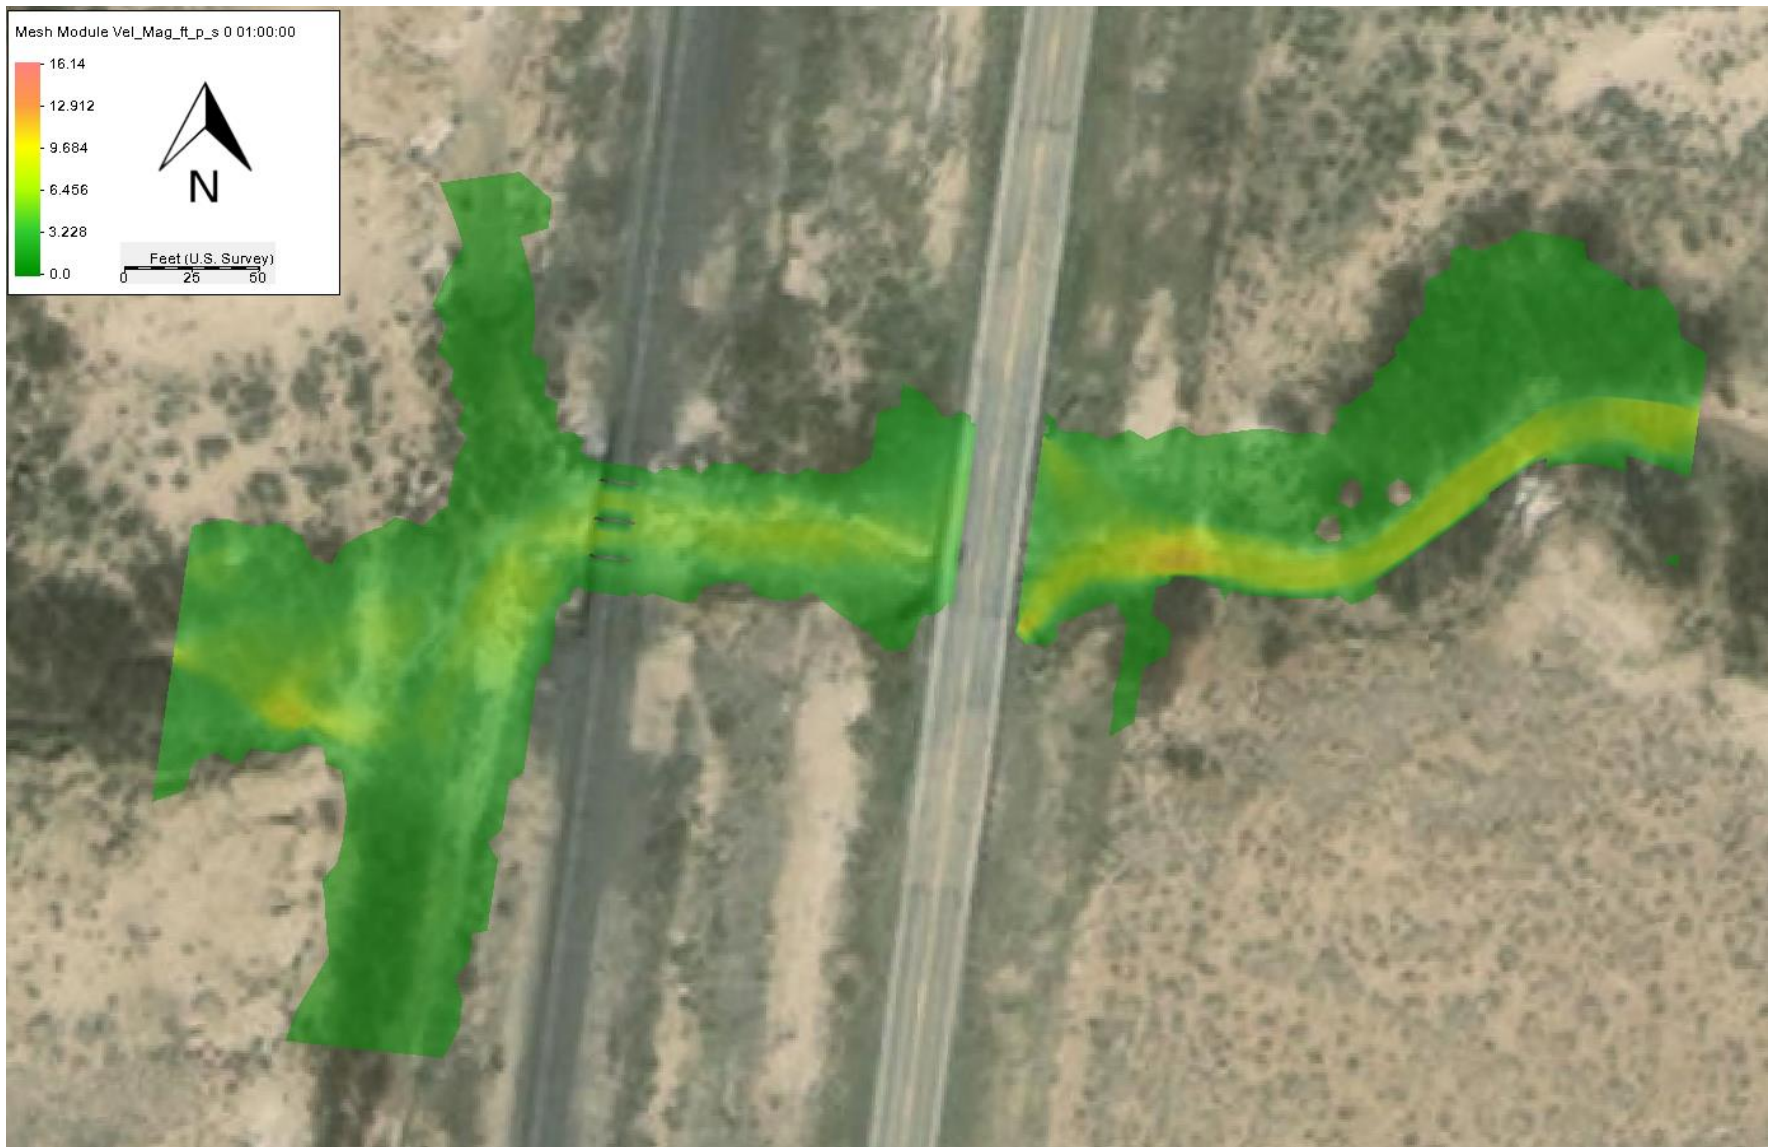

APPENDIX F PROPOSED BRIDGE ALTERNATIVE MODEL GRAPHICS

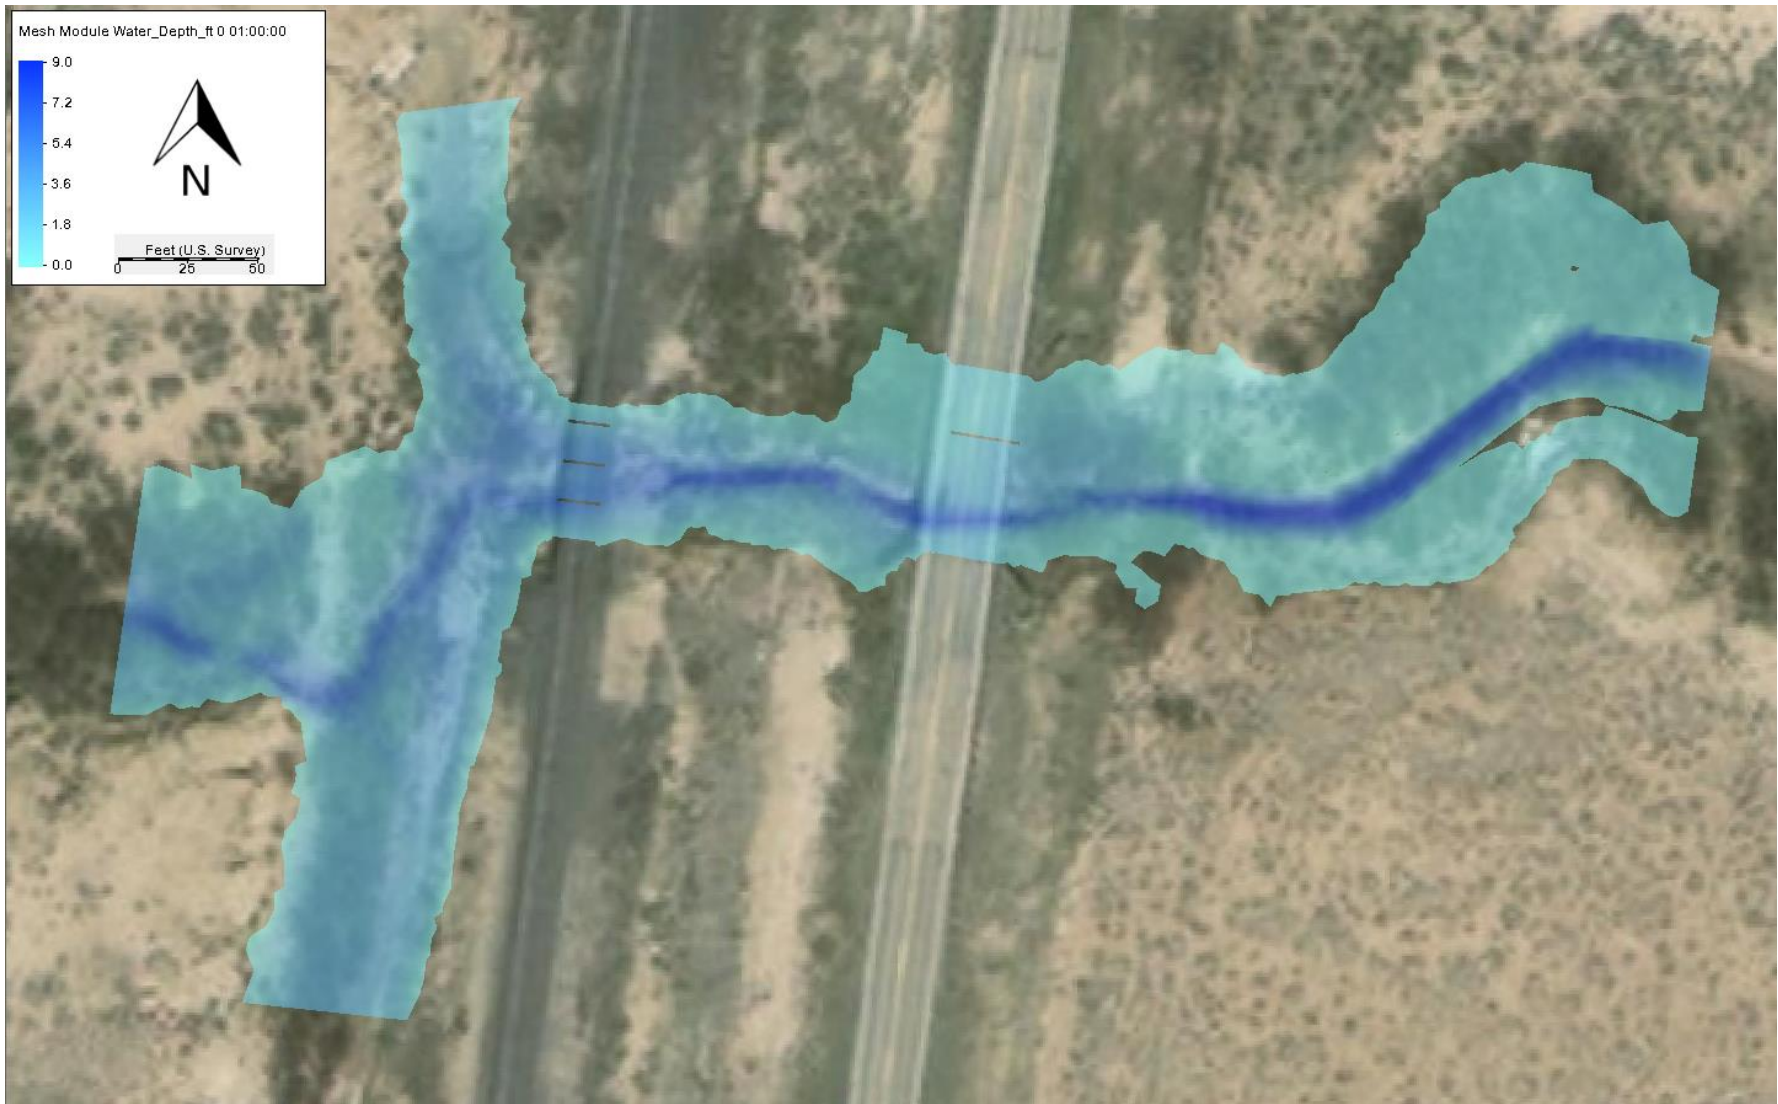



APPENDIX G WATER SURFACE ELEVATION COMPARISON GRAPHICS




CDOT REGION 2 – BRIDGE BUNDLE



RCBC CROSS SECTIONS USED TO COMPARE PROPOSED AND EXISTING RESULTS

STRUCTURE O-19-D

FIGURE 1

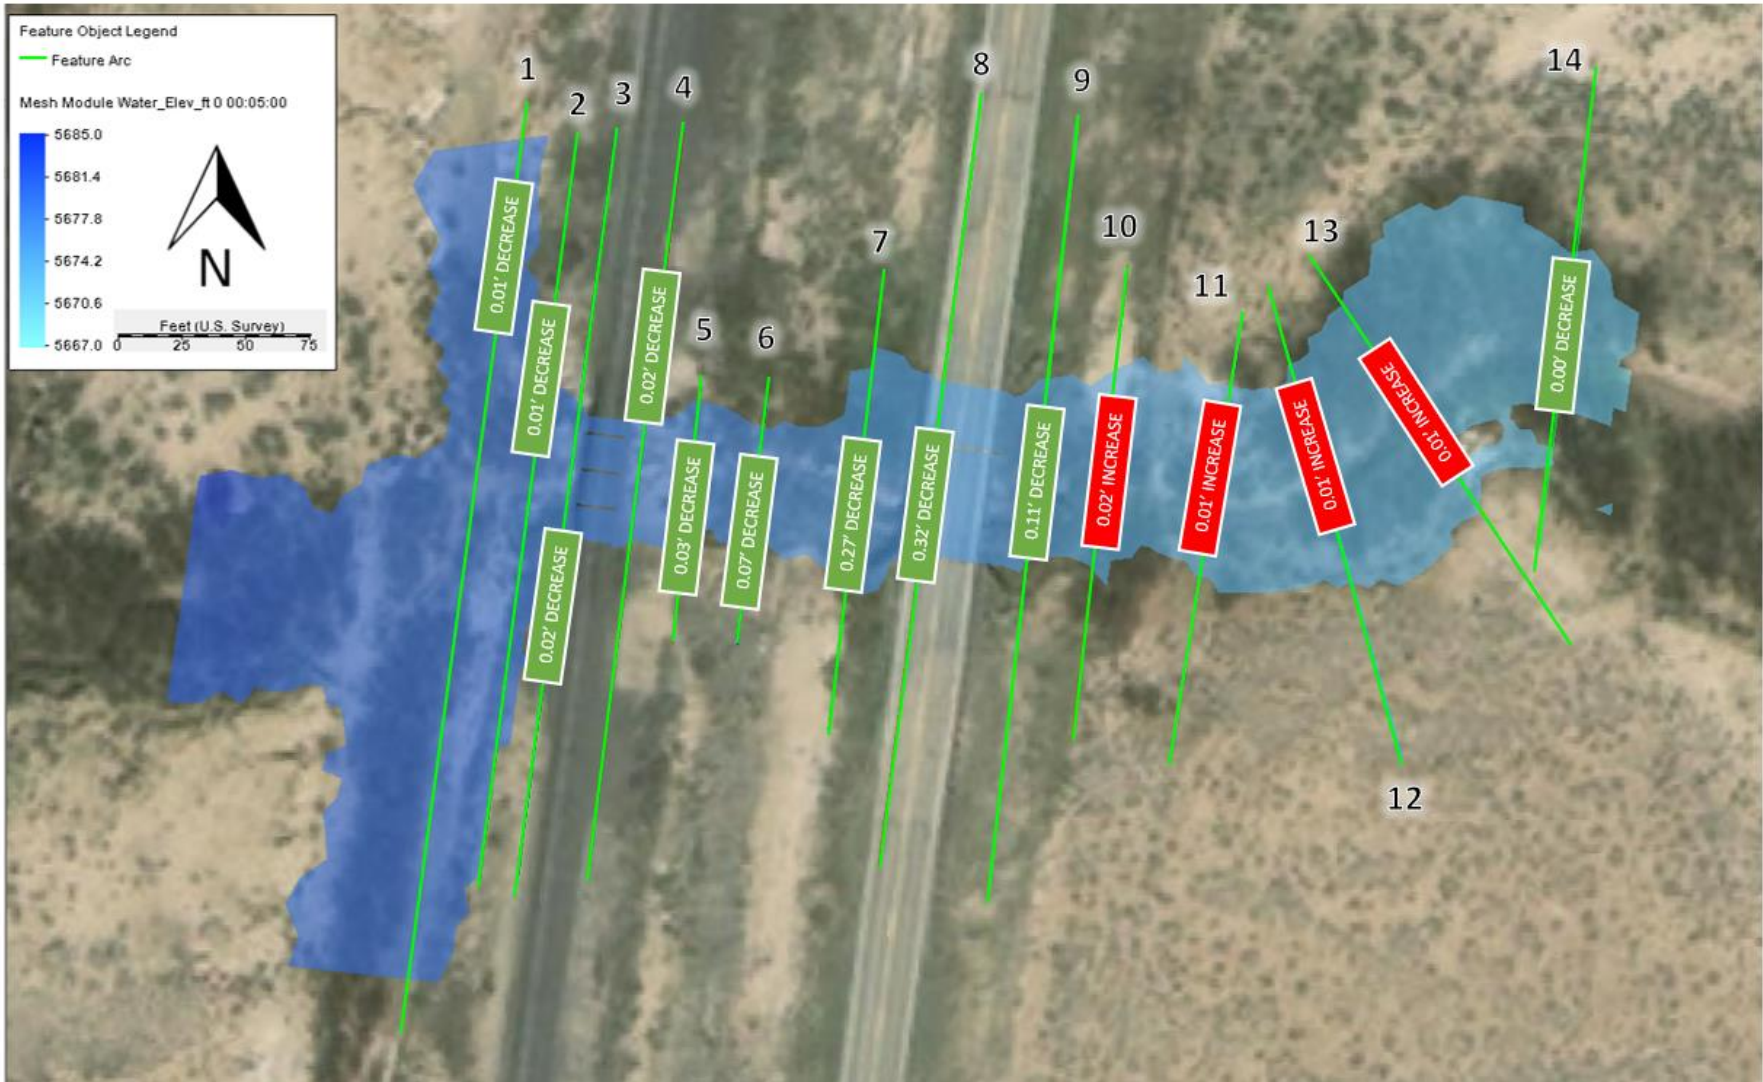

APPENDIX H RCBC OUTLET ENERGY DISSIPATION

HY-8 Energy Dissipation Report

Scour Hole Geometry

Parameter	Value	Units
Select Culvert and Flow		
Crossing	O-19-D	
Culvert	Culvert 1	
Flow	845.00	cfs
Culvert Data		
Culvert Width (including multiple barrels)	20.0	ft
Culvert Height	10.0	ft
Outlet Depth	7.40	ft
Outlet Velocity	5.71	ft/s
Froude Number	0.37	
Tailwater Depth	7.40	ft
Tailwater Velocity	3.50	ft/s
Tailwater Slope (SO)	0.0200	
Scour Data		
Time to Peak		
Note:	if Time to Peak is unknown, enter 30 min	
Time to Peak	30.00	min
Cohesion	Noncohesive	
D16 Value	0.16	mm
D84 Value	2.00	mm
Tailwater Flow Depth after Culvert Outlet	Normal Depth	
Results		
Assumptions		
Soil Sigma	3.54	
Scour Hole Dimensions		
Length	90.727	ft
Width	50.945	ft
Depth	9.140	ft
Volume	26612.063	ft ³
DS at .4(LS)	36.291	ft
Tailwater Depth (TW)	7.401	ft
Velocity with TW and WS	1.417	ft/s

HY-8 Energy Dissipation Report

External Energy Dissipator

Parameter	Value	Units
Select Culvert and Flow		
Crossing	O-19-D	
Culvert	Culvert 1	
Flow	845.00	cfs
Culvert Data		
Culvert Width (including multiple barrels)	20.0	ft
Culvert Height	10.0	ft
Outlet Depth	7.40	ft
Outlet Velocity	5.71	ft/s
Froude Number	0.37	
Tailwater Depth	7.40	ft
Tailwater Velocity	3.50	ft/s
Tailwater Slope (SO)	0.0200	
External Dissipator Data		
External Dissipator Category	Streambed Level Structures	
External Dissipator Type	Riprap Basin	
Restrictions		
Froude Number	<3	
Input Data		
Condition to be used to Compute Basin Outlet Velocity	Envelope Curve	
D50 of the Riprap Mixture		
Note:	Minimum HS/D50 = 2 is Obtained if D50 = 0.180 ft	
D50 of the Riprap Mixture	0.180	ft
DMax of the Riprap Mixture	0.500	ft
Results		
Brink Depth	7.401	ft
Brink Velocity	5.708	ft/s
Depth (YE)	7.401	ft
Riprap Thickness	0.750	ft
Riprap Foreslope	1.0000	ft
Check HS/D50		
Note:	OK if HS/D50 > 2.0	
HS/D50	2.286	
HS/D50 Check	HS/D50 is OK	
Check D50/YE		
Note:	OK if $0.1 < D50/YE < 0.7$	
Check D50/YE	0.024	
D50/YE Check	D50/YE is NOT OK	
Basin Length (LB)	80.000	ft
Basin Width	73.333	ft
Apron Length	20.000	ft
Pool Length	60.000	ft
Pool Depth (HS)	0.411	ft
TW/YE	1.000	
Tailwater Depth (TW)	7.401	ft
Average Velocity with TW	1.295	ft/s

Critical Depth (Yc)	1.581	ft
Average Velocity with Yc	6.987	ft/s
Downstream Riprap for High TW		
Distance: 1 LB		
Velocity	4.758	ft/s
Size	0.148	ft
Distance: 2 LB		
Velocity	2.974	ft/s
Size	0.058	ft
Distance: 3 LB		
Velocity	1.977	ft/s
Size	0.025	ft
Distance: 4 LB		
Velocity	1.480	ft/s
Size	0.014	ft


APPENDIX I GEOTECHNICAL INFORMATION

Summary of Laboratory Test Results


Project No: 220-063 Project Name: CDOT Region 2 Bridge Bundle - Scour Test Results Date: 11-06-2020

Sample Location			Natural Moisture Content (%)	Natural Dry Density (pcf)	Gradation			Atterberg			pH	Water Soluble Sulfate (%)	Water Soluble Chloride (%)	Resistivity (ohm-cm)	Swell (+) / Collapse (-) (% at Load in psf)	Unconf. Comp. Strength (psi)	R-Value	Classification	
Boring No.	Depth (ft)	Sample Type			Gravel > #4 (%)	Sand (%)	Fines < #200 (%)	LL	PL	PI								AASHTO	USCS
M-21-B Scour	0	BULK	6.1		4.0	14.9	81.1												
M-21-C Scour	0	BULK	3.5		72.0	20.1	7.9												
M-21-I Scour	0	BULK	4.5		0.0	5.3	94.7												
M-21-J Scour	0	BULK	7.3		1.0	3.5	95.5												
M-22-U Scour	0	BULK	5.9		31.0	24.3	44.7												
M-22-Y Scour	0	BULK	11.9		1.0	11.9	87.1												
N-21-C Scour	0	BULK	1.8		61.0	21.0	18.0												
N-21-F Scour	0	BULK	11.8		2.0	16.4	81.6												
O-19-D Scour	0	BULK	2.7		6.0	56.7	37.3												
P-19-G Scour	0	BULK	1.1		21.0	53.4	25.6												

03 GRAIN SIZE YEH 220-063 R2 BRIDGE BUNDLE.GPJ 2019 YEH COLORADO TEMPLATE.GDT 2019 YEH COLORADO LIBRARY.GLB 11/6/20

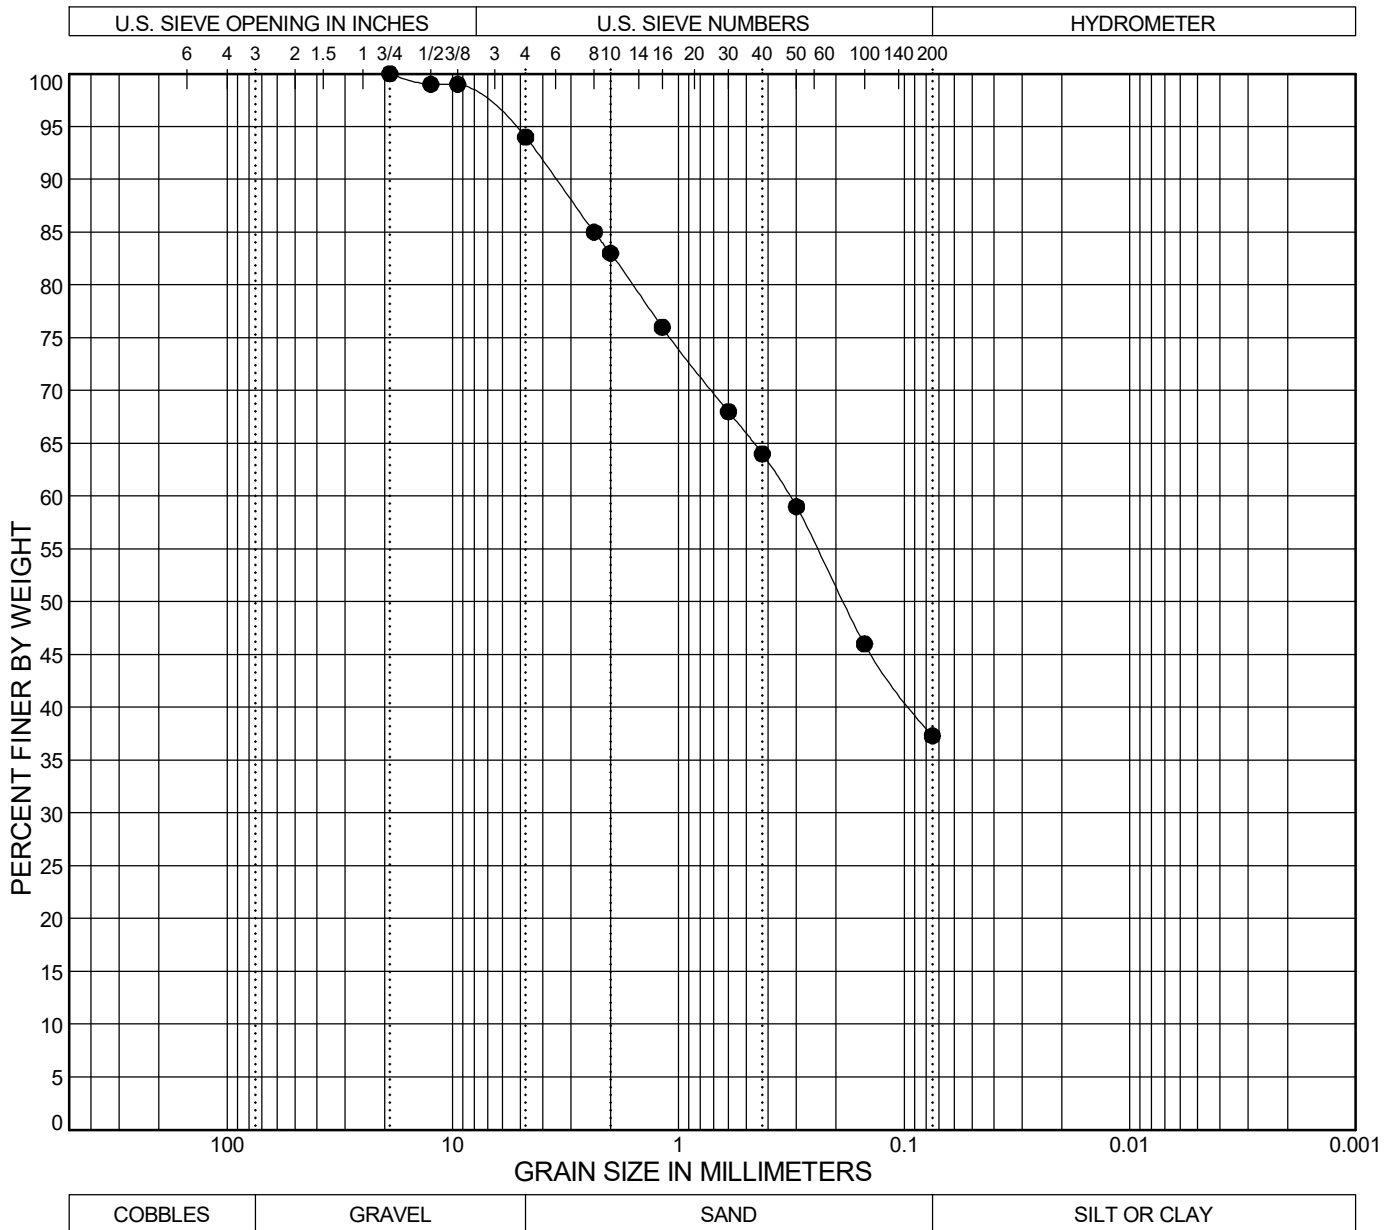

BOREHOLE	DEPTH (ft)	AASHTO Classification	USCS Classification	LL	PL	PI	%Gravel	%Sand	%Fines	
									%Silt	%Clay
● O-19-D Scour	0.0						6.0	56.7	37.3	

 Yeh and Associates, Inc. Geotechnical • Geological • Construction Services	<h2>SIEVE ANALYSIS</h2>	<h2>FIGURE</h2>
Project No. 220-063 Date: 11-06-2020 Report By: D. Gruenwald Yeh Lab: Colorado Springs Checked By: J. McCall	CDOT Region 2 Bridge Bundle Scour Test Results	