



American Association of
State Highway and
Transportation Officials

John R. Njord, President
Executive Director
Utah Department of Transportation

John Horsley
Executive Director

June 2004

Dear Customer:

Recently, we were made aware of some technical revisions made to the 4th Edition of *A Policy on Geometric Design of Highways and Streets, 2001*, or the “Green Book” as it is commonly called.

The revisions that were posted after the 2002 meeting of the Task Force on Geometric Design were incorporated into the Second Printing of the 4th Edition of the Green Book. To determine if you have a copy from the second printing, look at the title page of your book. The phrase “Second Printing” should appear just below “2001”.

If your copy of the book or CD is from the second printing, then you will need to incorporate only those revisions posted after the 2003 meeting of the Task Force on Geometric Design in order to make your text both accurate and current.

If your copy is from the first printing of the book or CD, please incorporate all of the following revisions in your original text so that your edition is both accurate and current.

AASHTO staff sincerely apologizes for any inconvenience.

AASHTO Publications Staff
June 2004

**Revisions posted after the July 2002 meeting of the Task Force on Geometric Design
(to be incorporated into the first printing of *A Policy on Geometric Design of Highways
and Streets*, 4th Edition, 2001)**

| Page | Exhibit | Existing Text | Correction Made |
|-------------|----------------|--|---|
| 39 | 2-21 | Path of front overhang indicates a radius of “13.07 m max [34.4 ft].” | Revised radius to read “10.49 m max [34.4 ft].” |
| 40 | 2-22 | Path of front overhang indicates a radius of “8.87 m max [25.5 ft].” | Revised radius to read “7.77 m max [25.5 ft].” |
| 40 | 2-22 | Path of right rear wheel indicates a radius of “2.78 m min [8.0 ft].” | Revised radius to read “2.44 m min [8.0 ft].” |
| 73 | 2-30 | Exhibit 2-30 is incorrect. | Replaced Exhibit 2-30. See attached. |
| 113 | | Under Design Values, the 2 nd sentence reads “...for wet pavements and for...” | Deleted “for wet pavements and.” |
| 145 | 3-14 | In the Metric section, the Total (e/100 + f) value for a Design Speed of 20 km/h with an e of 8% reads “0.28.” | Revised the value for Total (e/100 + f) to read “0.26.” |
| 145 | 3-14 | In the Metric section, the Total (e/100 + f) value for a Design Speed of 130 km/h with an e of 8% reads “0.18.” | Revised the value for Total (e/100 + f) to read “0.16.” |
| 145 | 3-14 | In the US Customary section, the Limiting Value of “f” for a Design Speed of 25 mph with an e of 8% reads “0.185.” | Revised the value for “f” to read “0.165.” |
| 145 | 3-14 | In the US Customary section, the calculated radius for 45 mph with an e of 8% reads “502.0” and the rounded radius reads “500.” | Revised the calculated radius to read “602.0” and the rounded radius to read “600.” |
| 145 | 3-14 | In the US Customary section, the Total (e/100 + f) value for a Design Speed of 30 mph with an e of 10% reads “0.280.” | Revised the value for Total (e/100 + f) to read “0.260.” |
| 145 | 3-14 | In the US Customary section, the calculated radius for 70 mph with an e of 10% reads “1838.8” and the rounded radius reads “1840.” | Revised the calculated radius to read “1638.8” and the rounded radius to read “1640.” |
| 145 | 3-14 | In the US Customary section, the rounded radius for 50 mph with an e of 12% reads “845.” | Revised the rounded radius to read “645.” |

| Page | Exhibit | Existing Text | Correction Made |
|-------------|----------------|--|--|
| 168 | 3-26 | In US Customary section, the units in the 1 st three columns are in metric (km/h, km/h, m). | Revised Design Speed units to (mph), Average Running Speed to (mph), and Minimum curve radius to (ft). |
| 224 | 3-55 | In the Metric section, the heading for the Case I column reads “with provision for passing a stalled vehicle.” | Revised Case I to read “no provision for passing a stalled vehicle” so that it matches the US Customary heading. |
| 244 | | In the 3 rd full paragraph, the last line contains a critical length of 360 m [1200 ft]. | Revised the critical length to read “350 m [1200 ft].” |
| 244 | | In the 5 th full paragraph, the last line contains a critical length of 300 m [1000 ft]. | Revised the critical length to read “370 m [1250 ft].” |
| 250 | | In the 3 rd full paragraph on the page, the last line reads “...50 m [150 ft] long.” | Revised the last line to read “...90 m [300 ft] long.” |
| 251 | | The 2 nd line on the page reads “...at least 60 m [200 ft] long.” | Revised the 2 nd line to read “...at least 180 m [600 ft] long.” |
| 255 | | Item 3 in the center of the page reads “Where the critical length of grade exceeds the physical ...” | Revised Item 3 to read “Where the critical length of grade is less than the physical ...” |
| 255 | | The last line of Item 3 in the center of the page references Exhibits 3-65 and 3-66. | Revised the exhibits referenced to Exhibits 3-63 and 3-64. |
| 274 | 3-76 | Exhibit 3-76. Design Controls ...for Crest and Sag Vertical Curves. | Deleted “and Sag” from Exhibit title. |
| 351 | | Insert additional text after 2 nd paragraph and before Exhibit 4-15. | Inserted a new paragraph to read: “Shrubs, trees or ground covers are not very efficient in shielding sound because of their permeability to air flow. However, almost all buffer plantings offer some noise reduction and exceptionally wide and dense plantings may result in substantial reductions in noise levels. Even where the noise reduction is not considered significant, the aesthetic effects of the plantings will produce a positive effect.” |
| 389 | | Under Structures, the last paragraph refers to Chapter 9 in the 2 nd sentence. | Revised the reference to read Chapter 10 so that the 2 nd sentence reads, “For general discussion of structure widths, see Chapter 10.” |

| Page | Exhibit | Existing Text | Correction Made |
|-------------|----------------|---|--|
| 406 | 5-11 | In the Metric section, Residential sidewalks indicate 5.5 lux. | Replaced “5.5 lux” with “2.2 lux.” |
| 425 | | Under Cross Slope, the 2 nd paragraph indicates a cross slope of 3 to 7 percent is desirable for low-type pavements. | Revised “3 to 7” to read “3 to 6” to match cross-slope discussion and Exhibit 4-4 in Chapter 4. |
| 510 | 8-1 | Footnote of Exhibit 8-1 reads “Grades 1% steeper than the value shown may be used for extreme cases in urban areas where development precludes the use of flatter grades and for one-way downgrades except in mountainous terrain.” | Changed footnote to read “Grades 1% steeper than the value shown may be provided in mountainous terrain or in urban areas with crucial right-of-way controls.” |
| 567 | 9-8B | Divisional Island is missing from Exhibit 9-8B. | Added a Divisional Island on the through roadway to the right of the intersecting roadway in Exhibit 9-8B. |
| 592 | 9-20 | In the Metric section, for an angle of turn of 60 degrees for a WB-15 vehicle, the Asymmetric Offset reads “.06–2.0.” | Revised the Asymmetric Offset to read “0.6–2.0.” |
| 593 | 9-20 | In the US Customary section, for an angle of turn of 75 degrees, a P vehicle, the symmetric three-centered curve Curve radii reads “100-75-100.” | Revised the Curve radii to read “100-25-100.” |
| 594 | 9-20 | In the metric section, for an angle of turn of 120 degrees, a P vehicle, the symmetric three-centered curve Curve radii reads “30-60-30.” | Revised the Curve radii to read “30-6-30.” |
| 601 | 9-22C | The US Customary caption of the exhibit shows a three-centered compound curve of 120 ft –140 ft –120 ft radii. | Revised the caption to read “120 ft – 40 ft – 120 ft.” |
| 620 | 9-31 | In the US Customary section for R = 20 ft, Case A, and a delta 150°, the d ₂ is indicated as 12.2. | Revised the d ₂ for R = 20 ft, Case A, and a delta of 150° to read 40. |
| 629 | | Exhibit 3-43 is referenced in the 6 th line of the 3 rd paragraph on the page. | Changed the exhibit referenced to Exhibit 3-55. |
| 641 | | Exhibit 9-40B is referenced in the 3 rd line of the 1 st paragraph on the page. | Changed the exhibit referenced to Exhibit 9-41B. |
| 641 | | Exhibits 9-36 and 9-37 are referenced in the last line of the 4 th paragraph on the page. | Changed the exhibits referenced to Exhibits 9-37 and 9-38. |

| Page | Exhibit | Existing Text | Correction Made |
|-------------|----------------|---|--|
| 643 | | Exhibit 9-19 is referenced in the 10 th line of the 2 nd full paragraph on the page. | Changed the exhibit referenced to Exhibit 3-43. |
| 646 | | Exhibit 3-26 is referenced in the 5 th line of the 2 nd full paragraph on the page. | Changed the exhibit referenced to Exhibit 3-43. |
| 663 | | Exhibit 9-49B is referenced in the 1 st line of the 4 th full paragraph on the page. | Changed the exhibit referenced to Exhibit 9-50B. |
| 664 | 9-54 | The 1 st line of the Note under the table reads “Time gaps are for a stopped vehicle to turn right or left...” | Deleted “right or” from the 1 st line of the note. |
| 664 | | 1 st paragraph, 3 rd line reads “major road is 90 km/h [60 mph]...” | Revised the 3 rd line to read “major road is 100 km/h [60 mph]...” |
| 664 | | 1 st paragraph, 3 rd line calculation reads “ $0.278(90)(7.5) = 187.7$ or 190 m.” | In the calculation, replaced “90” with “100” and “187.7 or 190” with “208.5 or 210 m.” |
| 664 | | 2 nd paragraph, 3 rd line reads “200 m [704 ft].” | Revised dimension to read “223 m [706 ft].” |
| 699 | 9-81 | In the center of the exhibit, two dimensions are shown as “R = 30 m [50 ft].” | Revised the dimensions to read “R = 15 m [50 ft].” |
| 700 | 9-82 | In the center of the exhibit, two dimensions are shown as “R = 23 m [100 ft].” | Revised the dimensions to read “R = 23 m [75 ft].” |
| 702 | | Exhibit 9-79 is referenced in the 5 th line of the 4 th full paragraph on the page. | Changed the exhibit referenced to Exhibit 9-78. |
| 703 | | Exhibit 9-79 is referenced in the 3 rd line of the 3 rd paragraph on the page. | Changed the exhibit referenced to Exhibit 9-76. |
| 703 | | Exhibit 9-79 is referenced in the 1 st line of the 5 th paragraph on the page. | Changed the exhibit referenced to Exhibit 9-81. |
| 705 | | Exhibit 9-85 is referenced in the 1 st line of the 4 th full paragraph on the page. | Changed the exhibit referenced to Exhibit 9-86. |
| 706 | | Exhibit 9-86 is referenced in the 2 nd line of the 2 nd paragraph on the page. | Changed the exhibit referenced to Exhibit 9-85. |

| Page | Exhibit | Existing Text | Correction Made |
|------|---------|--|---|
| 706 | | Exhibit 9-84 is referenced in the 12 th line (last) of the 6 th paragraph on the page. | Changed the exhibit referenced to Exhibit 9-87. |
| 708 | 9-87 | Five items in this exhibit are incorrect: (1) Point 1 is misplaced, (2) the dimension b is lower case, (3) a dimension for R ₁ is incorrect, (4) several values for B are incorrect, and (5) the dimension line is missing for M. | Replaced Exhibit 9-87. See attached. Changed “b” to “B” in last sentence of 1 st paragraph. |
| 725 | 9-97 | The note in the legend block refers to Exhibits 9-74, 9-77, 9-79, and 9-80. | Revised the note to read “Refer to Exhibits 9-77 through 9-83.” |
| 737 | | The last paragraph on the page refers to Exhibit 9-103 in the 3 rd line. | Changed the reference to Exhibit 9-104. |
| 738 | | In the Metric section of the equation table, the equation for d _H reads: $d_H = AV_v t + D + d_e$ | Replaced the equation for d _H with: $d_H = AV_v t + \frac{BV_v^2}{a} + D + d_e$ |
| 738 | | In the definitions in the equation box, d _e = 3.0 m on the metric side and 10 ft on the US Customary side. | Changed the values in the equation box to d _e = 2.4 m and d _e = 8 ft on the appropriate sides of the equation box. |
| 739 | 9-103 | The equations for Metric and US Customary at the top of the exhibit are incorrect. | Replaced the equations at the top of the exhibit with the equations shown in the equation box on page 738. Changed the values in the equation box to d _e = 2.4 m and d _e = 8 ft on the appropriate sides of the equation box. |
| 741 | 9-104 | The values for d _H are incorrect. Incorrect values for d _e were used in the calculation (3.0 and 10 instead of 2.4 and 8). | Replaced the last line of Exhibit 9-104 with the following: Distance along highway from crossing, d _H (m) 15 25 38 53 70 90 112 136 162 191 222 255 291 Distance along highway from crossing, d _H (ft) 69 135 220 324 447 589 751 931 |
| 742 | 9-105 | The equations for Metric and US Customary at the top of the exhibit contain an error. | Replaced the equations at the top of the exhibit with equations shown in the equation box on page 740. |
| 838 | 10-60 | Exhibit 10-60 is incorrect. | Replaced Exhibit 10-60. See attached. |
| 839 | | In the 2 nd paragraph on the page, the 2 nd line references Exhibit 10-61. | Revised the reference to Exhibit 10-60. |

| Page | Exhibit | Existing Text | Correction Made |
|-------------|----------------|---|--|
| 843 | 10-67 | In the Metric section, the heading for the Case I column reads “with provision for passing a stalled vehicle.” | Revised Case I to read “no provision for passing a stalled vehicle” so that it matches the US Customary heading. |
| 852 | 10-71 | In the metric section, under the column All Speeds, the second grouping of speeds reads “3 to 4% downgrade.” | Revised the heading of the 2 nd group of speeds to read “5 to 6% downgrade.” |
| 854 | 10-72A | The dimension line for 3.6 m [12 ft] should be shown from the right edge of the ramp to the projected right edge of the right freeway lane upstream from the ramp (similar to the way it is shown in Exhibit 10-72B). | Revised figure for Exhibit 10-72A. See attached. |


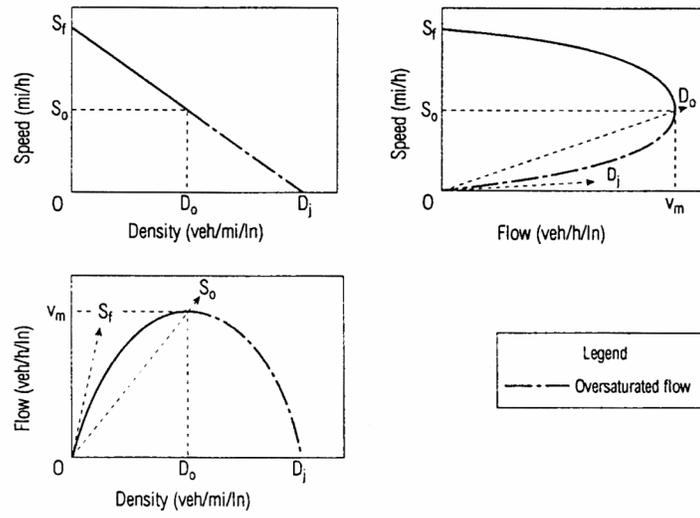



Exhibit 2-30. Generalized Speed-Volume-Density Relationships (15)

| Metric | | | | | | US Customary | | | | | | | |
|-----------------------|---------------------------|------|-----------------------|------|-----------------------|--------------|------------------------|-------------------------|----|-------------------------|----|-------------------------|-----|
| M width of median (m) | Dimensions in meters when | | | | | | M width of median (ft) | Dimensions in feet when | | | | | |
| | R ₁ = 30 m | | R ₁ = 50 m | | R ₁ = 70 m | | | R ₁ = 90 ft | | R ₁ = 170 ft | | R ₁ = 230 ft | |
| | L | B | L | B | L | B | L | B | L | B | L | B | |
| 6.0 | 18.0 | 20.2 | 20.2 | 24.4 | 21.3 | 27.6 | 20 | 58 | 65 | 66 | 78 | 71 | 90 |
| 9.0 | 15.1 | 21.4 | 17.7 | 26.5 | 19.0 | 30.4 | 30 | 48 | 68 | 57 | 85 | 63 | 101 |
| 12.0 | 12.8 | 22.4 | 15.6 | 28.3 | 17.1 | 32.7 | 40 | 40 | 71 | 50 | 90 | 57 | 109 |
| 15.0 | — | — | 13.8 | 29.9 | 15.4 | 34.7 | 50 | — | — | 44 | 95 | 51 | 115 |
| 18.0 | — | — | — | — | 13.8 | 36.7 | 60 | — | — | — | — | 46 | 122 |
| 21.0 | — | — | — | — | 12.4 | 38.4 | 70 | — | — | — | — | 41 | 128 |

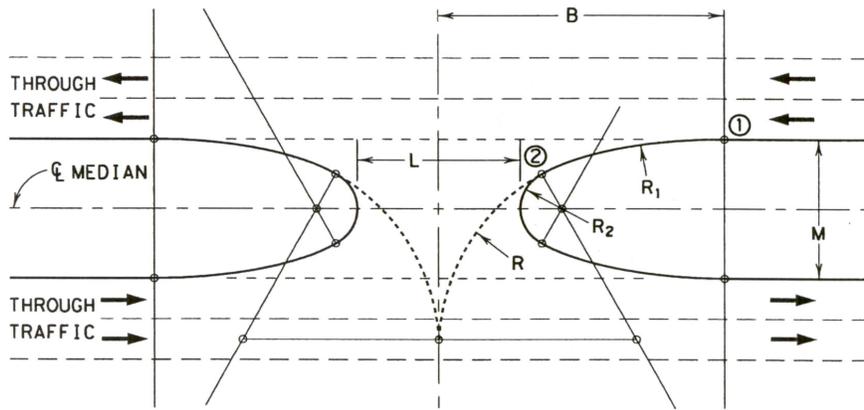


ASSUMED: $R = 15 \text{ m [50 ft]}$
 $R_2 = M/5$

Exhibit 9-87. Above Minimum Design of Median Openings (Typical Bullet-Nose Ends)

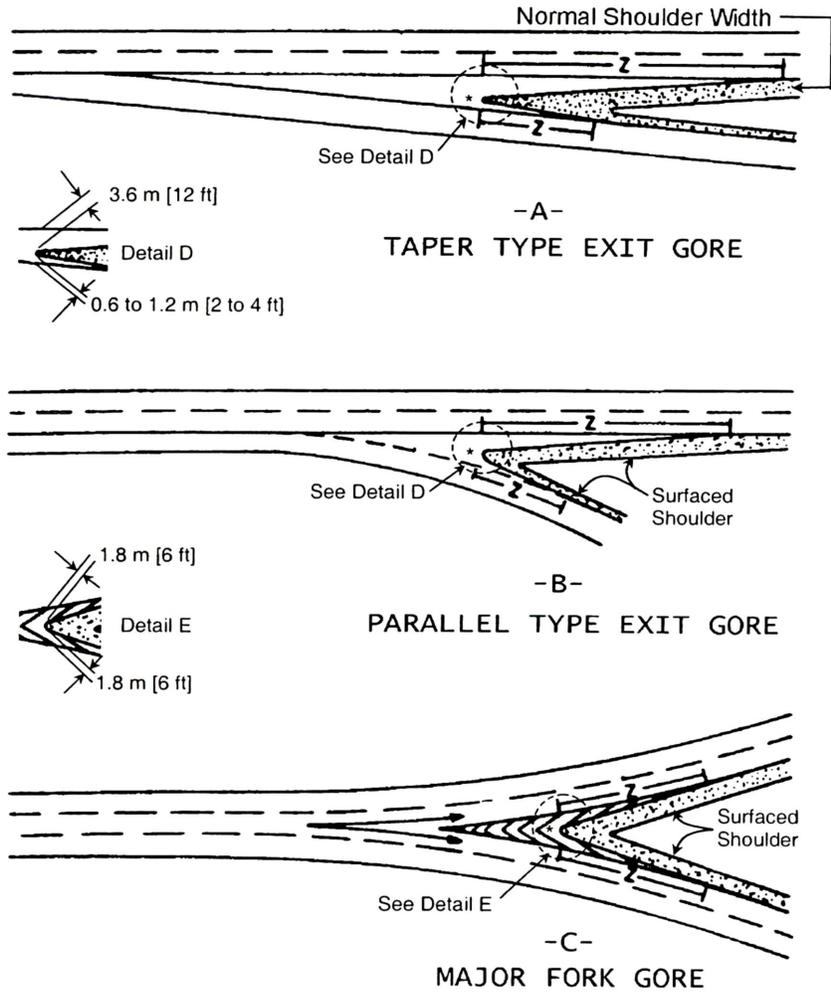


* Nose radius 0.6 to 1.2 m [2 to 4 ft] or squared


Exhibit 10-60. Typical Gore Details

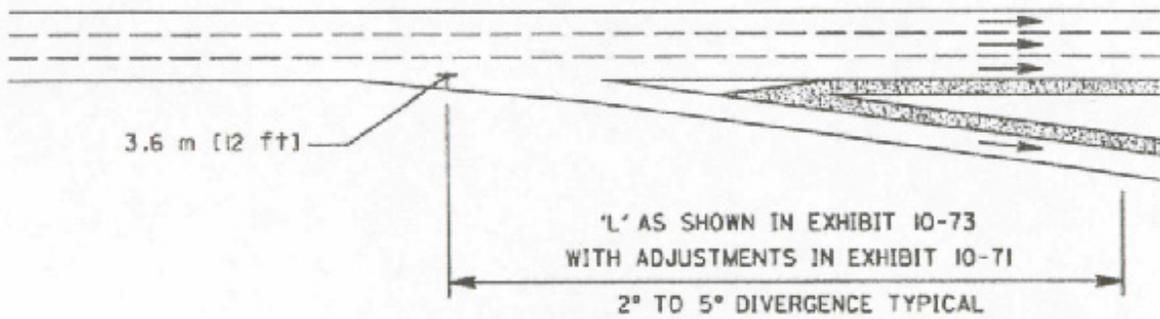

-A- TAPERED DESIGN - TANGENT

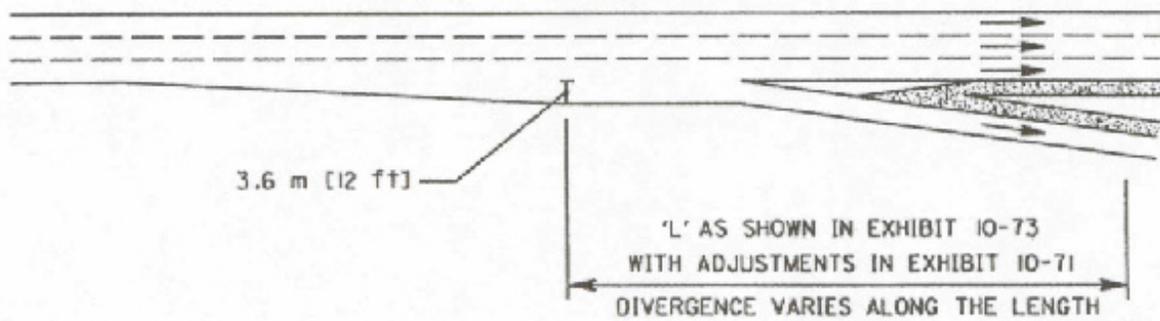

-B- TAPERED DESIGN - CURVILINEAR

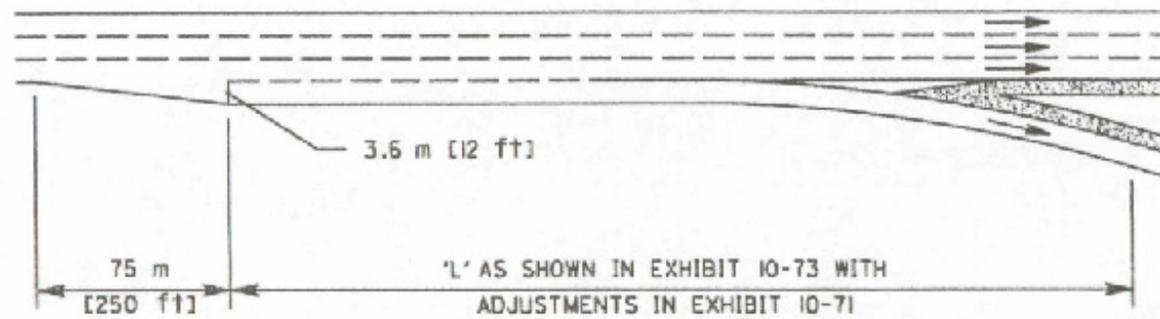

-C- PARALLEL DESIGN

(A) POINT CONTROLLING SPEED AT RAMP

Exhibit 10-72. Exit Ramps—Single Lane

Additional revisions to be incorporated into the first printing of *A Policy on Geometric Design of Highways and Streets*, 4th Edition, 2001

| Page | Exhibit | Existing Text | Correction Made |
|-------------|----------------|--|---|
| 16 | 2-1 (Metric) | Footnotes in Exhibit 2-1 are out of order. | Reordered footnotes for Exhibit 2-1. See attached. |
| 17 | 2-1 (US) | Footnotes in Exhibit 2-1 are out of order. | Reordered footnotes for Exhibit 2-1. See attached. |
| 27 | 2-9 | The Path of the Front Overhang indicates radius of “13.35 m max. [42.8 ft].” | Revised the radius to read “13.05 m max. [42.8 ft].” See attached. |
| 34 | 2-16 | Wheelbase of vehicle reads “19.42 m [65 ft].” | Revised the Wheelbase to read “19.81 m [65 ft].” See attached. |
| 35 | 2-17 | The overall length of the design vehicle is shown as 22.05 m [72.33 ft]. | Revised overall length of the design vehicle to read “22.4 m [73.3 ft].” See attached. |
| 58 | | 4 th paragraph, 8 th line | Replaced “double” with “significantly higher than.” |
| 66 | | 2 nd full paragraph, 7 th and 8 th line | Changed “four” to “five” in line 7 and replaced “and” with a comma (,) in the 8 th line. |
| 250 | | 3 rd full paragraph, 13 th line | Deleted “depending on the weight/power ratio of the appropriate truck.” Added the new sentence, “Different curves would apply for trucks with other than a weight/power ratio of 120 kg/kW [200 lb/hp].” |
| 271 | | In the equation box, the US Customary side reads $L = \dots, m$; $S = \dots, m$; $h_1 = \dots, m$ and $h_2 = \dots, m$. | Replaced “m” with “ft.” |
| 358 | | In last sentence of 1 st paragraph | Changed “total width” to “roadway width.” |
| 511 | | 1 st full paragraph, 2 nd line | Inserted as a 2 nd sentence “On urban routes with less than the 4.9-m [16-ft] clearance, the vertical clearance to sign trusses should be 0.3 m [1 ft] greater than the minimum clearance for other structures.” |
| 619– 620 | 9-31 | 1 st column in the Metric and the US Customary sections of the exhibit is not identified. | Inserted as the column heading: Angle of Intersection (Δ). |

| Page | Exhibit | Existing Text | Correction Made |
|-------------|----------------|---|--|
| 637 | 9-40 | Section Between P. T. and P.R.C. is incorrect. | Replaced illustration for Section Between P. T. and P.R.C. See attached. |
| 643 | | Exhibit 9-43 is referenced in the 4 th line of the 2 nd full paragraph on the page. | Changed the exhibit referenced to Exhibits 9-43B and 9-43C. |
| 696 | 9-76 | The path for the WB-62 vehicle is not labeled for US Customary section. | Labeled the line in both Parts A and B of Exhibit 9-76 consisting of alternating long and short dashes as WB-62. See attached. |
| 725 | 9-97 | 2 nd Metric drawing does not contain a caption. | Added a caption – 1 st line: “M = 5.4 m and over – Elongated taper”; 2 nd line: “-B-”. See attached. |

Metric

| Design Vehicle Type | Symbol | Dimensions (m) | | | | | | | | | | Typical Kingpin to Center of Rear of Axle | | | | |
|-------------------------------------|----------|----------------|---------|------------------|----------|----------------------|-----------------|-----------------|------------------|------------------|------|---|---|---|---|-----------|
| | | Overall | | | Overhang | | Dimensions (m) | | | | | | | | | |
| | | Height | Width | Length | Front | Rear | WB ₁ | WB ₂ | WB ₃ | WB ₄ | T | | S | | | |
| Passenger Car | P | 1.3 | 2.1 | 5.8 | 0.9 | 1.5 | 3.4 | — | — | — | — | — | — | — | — | — |
| Single Unit Truck | SU | 3.4-4.1 | 2.4 | 9.2 | 1.2 | 1.8 | 6.1 | — | — | — | — | — | — | — | — | — |
| Buses | | | | | | | | | | | | | | | | |
| Inter-city Bus (Motor Coaches) | BUS-12 | 3.7 | 2.6 | 12.2 | 1.8 | 1.9 ^a | 7.3 | 1.1 | — | — | — | — | — | — | — | — |
| | BUS-14 | 3.7 | 2.6 | 13.7 | 1.8 | 2.6 ^a | 8.1 | 1.2 | — | — | — | — | — | — | — | — |
| City Transit Bus | CITY-BUS | 3.2 | 2.6 | 12.2 | 2.1 | 2.4 | 7.6 | — | — | — | — | — | — | — | — | — |
| Conventional School Bus (65 pass.) | S-BUS 11 | 3.2 | 2.4 | 10.9 | 0.8 | 3.7 | 6.5 | — | — | — | — | — | — | — | — | — |
| Large School Bus (84 pass.) | S-BUS 12 | 3.2 | 2.4 | 12.2 | 2.1 | 4.0 | 6.1 | — | — | — | — | — | — | — | — | — |
| Articulated Bus | A-BUS | 3.4 | 2.6 | 18.3 | 2.6 | 3.1 | 6.7 | 5.9 | 1.9 ^b | 4.0 ^c | — | — | — | — | — | — |
| Trucks | | | | | | | | | | | | | | | | |
| Intermediate Semitrailer | WB-12 | 4.1 | 2.4 | 13.9 | 0.9 | 0.8 ^a | 3.8 | 8.4 | — | — | — | — | — | — | — | 8.4 |
| Intermediate Semitrailer | WB-15 | 4.1 | 2.6 | 16.8 | 0.9 | 0.6 ^a | 4.5 | 10.8 | — | — | — | — | — | — | — | 11.4 |
| Interstate Semitrailer | WB-19* | 4.1 | 2.6 | 20.9 | 1.2 | 0.8 ^a | 6.6 | 12.3 | — | — | — | — | — | — | — | 13.0 |
| Interstate Semitrailer | WB-20** | 4.1 | 2.6 | 22.4 | 1.2 | 1.4-0.8 ^a | 6.6 | 13.2-13.8 | — | — | — | — | — | — | — | 13.9-14.5 |
| "Double-Bottom" Semitrailer/Trailer | WB-20D | 4.1 | 2.6 | 22.4 | 0.7 | 0.9 | 3.4 | 7.0 | 0.9 ^c | 2.1 ^c | 7.0 | — | — | — | — | 7.0 |
| Triple-Semitrailer/ Trailers | WB-30T | 4.1 | 2.6 | 32.0 | 0.7 | 0.9 | 3.4 | 6.9 | 0.9 ^d | 2.1 ^d | 7.0 | 7.0 | — | — | — | 7.0 |
| Turnpike Double-Semitrailer/Trailer | WB-33D* | 4.1 | 2.6 | 34.8 | 0.7 | 0.8 ^a | 4.4 | 12.2 | 0.8 ^e | 3.1 ^e | 13.6 | — | — | — | — | 13.0 |
| Recreational Vehicles | | | | | | | | | | | | | | | | |
| Motor Home | MH | 3.7 | 2.4 | 9.2 | 1.2 | 1.8 | 6.1 | — | — | — | — | — | — | — | — | — |
| Car and Camper Trailer | P/T | 3.1 | 2.4 | 14.8 | 0.9 | 3.1 | 3.4 | — | — | — | — | — | — | — | — | — |
| Car and Boat Trailer | P/B | — | 2.4 | 12.8 | 0.9 | 2.4 | 3.4 | — | — | — | — | — | — | — | — | — |
| Motor Home and Boat Trailer | MH/B | 3.7 | 2.4 | 16.2 | 1.2 | 2.4 | 6.1 | — | — | — | — | — | — | — | — | — |
| Farm Tractor ^f | TR | 3.1 | 2.4-3.1 | 4.9 ^g | — | — | 3.1 | 2.7 | 0.9 | 2.0 | — | — | — | — | — | — |

Note: Since vehicles are manufactured in U.S. Customary dimensions and to provide only one physical size for each design vehicle, the values shown in the design vehicle drawings have been soft converted from numbers listed in feet, and then the numbers in this table have been rounded to the nearest tenth of a meter.

* = Design vehicle with 14.63 m trailer as adopted in 1982 Surface Transportation Assistance Act (STAA).
 ** = Design vehicle with 16.16 m trailer as grandfathered in with 1982 Surface Transportation Assistance Act (STAA).

a = This is overhang from the back axle of the tandem axle assembly.
 b = Combined dimension is typically 3.05 m.

c = Combined dimension is typically 3.05 m.
 d = Combined dimension is typically 3.81 m.

e = Dimensions are for a 150–200 hp tractor excluding any wagon length.
 f = To obtain the total length of tractor and one wagon, add 5.64 m to tractor length. Wagon length is measured from front of drawbar to rear of wagon, and drawbar is 1.98 m long.

- WB₁, WB₂, and WB₄ are the effective vehicle wheelbases, or distances between axle groups, starting at the front and working towards the back of each unit.
- S is the distance from the rear effective axle to the hitch point or point of articulation.
- T is the distance from the hitch point or point of articulation measured back to the center of the next axle or center of tandem axle assembly.

Exhibit 2-1. Design Vehicle Dimensions

US Customary

| Design Vehicle Type | Symbol | Dimensions (ft) | | | | | | | | | | Typical Kingpin to Center of Rear Axle | | | |
|-------------------------------------|------------|-----------------|-------|-----------------|----------|----------------------|-----------------|---|------------------|-------------------|------|--|---|---|-----------|
| | | Overall | | | Overhang | | | WB ₁ WB ₂ WB ₃ WB ₄ | | | | | | | |
| | | Height | Width | Length | Front | Rear | WB ₁ | WB ₂ | WB ₃ | WB ₄ | T | | S | | |
| Passenger Car | P | 4.25 | 7 | 19 | 3 | 5 | 11 | - | - | - | - | - | - | - | - |
| Single Unit Truck | SU | 11-13.5 | 8.0 | 30 | 4 | 6 | 20 | - | - | - | - | - | - | - | - |
| Buses | | | | | | | | | | | | | | | |
| Inter-city Bus (Motor Coaches) | BUS-40 | 12.0 | 8.5 | 40 | 6 | 6.3 ^a | 24 | 3.7 | - | - | - | - | - | - | - |
| | BUS-45 | 12.0 | 8.5 | 45 | 6 | 8.5 ^a | 26.5 | 4.0 | - | - | - | - | - | - | - |
| City Transit Bus | CITY-BUS | 10.5 | 8.5 | 40 | 7 | 8 | 25 | - | - | - | - | - | - | - | - |
| Conventional School Bus (65 pass.) | S-BUS 36 | 10.5 | 8.0 | 35.8 | 2.5 | 12 | 21.3 | - | - | - | - | - | - | - | - |
| Large School Bus (84 pass.) | S-BUS 40 | 10.5 | 8.0 | 40 | 7 | 13 | 20 | - | - | - | - | - | - | - | - |
| Articulated Bus | A-BUS | 11.0 | 8.5 | 60 | 8.6 | 10 | 22.0 | 19.4 | 6.2 ^b | - | - | - | - | - | - |
| Trucks | | | | | | | | | | | | | | | |
| Intermediate Semitrailer | WB-40 | 13.5 | 8.0 | 45.5 | 3 | 2.5 ^a | 12.5 | 27.5 | - | - | - | - | - | - | 27.5 |
| Intermediate Semitrailer | WB-50 | 13.5 | 8.5 | 55 | 3 | 2 ^a | 14.6 | 35.4 | - | - | - | - | - | - | 37.5 |
| Interstate Semitrailer | WB-62* | 13.5 | 8.5 | 68.5 | 4 | 2.5 ^a | 21.6 | 40.4 | - | - | - | - | - | - | 42.5 |
| Interstate Semitrailer | WB-65** or | 13.5 | 8.5 | 73.5 | 4 | 4.5-2.5 ^a | 21.6 | 43.4-45.4 | - | - | - | - | - | - | 45.5-47.5 |
| "Double-Bottom" Semitrailer/Trailer | WB-67D | 13.5 | 8.5 | 73.3 | 2.33 | 3 | 11.0 | 23.0 | 3.0 ^c | 7.0 ^c | 23.0 | - | - | - | 23.0 |
| Triple-Semitrailer/Trailers | WB-100T | 13.5 | 8.5 | 104.8 | 2.33 | 3 | 11.0 | 22.5 | 3.0 ^d | 7.0 ^d | 23.0 | 23.0 | - | - | 23.0 |
| Turnpike Double-Semitrailer/Trailer | WB-109D* | 13.5 | 8.5 | 114 | 2.33 | 2.5 ^e | 14.3 | 39.9 | 2.5 ^e | 10.0 ^e | 44.5 | - | - | - | 42.5 |
| Recreational Vehicles | | | | | | | | | | | | | | | |
| Motor Home | MH | 12 | 8 | 30 | 4 | 6 | 20 | - | - | - | - | - | - | - | - |
| Car and Camper Trailer | P/T | 10 | 8 | 48.7 | 3 | 10 | 11 | - | 5 | 19 | - | - | - | - | - |
| Car and Boat Trailer | P/B | - | 8 | 42 | 3 | 8 | 11 | - | 5 | 15 | - | - | - | - | - |
| Motor Home and Boat Trailer | MH/B | 12 | 8 | 53 | 4 | 8 | 20 | - | 6 | 15 | - | - | - | - | - |
| Farm Tractor ^f | TR | 10 | 8-10 | 16 ^g | - | - | 10 | 9 | 3 | 6.5 | - | - | - | - | - |

* = Design vehicle with 48 ft trailer as adopted in 1982 Surface Transportation Assistance Act (STAA).
 ** = Design vehicle with 53 ft trailer as grandfathered in with 1982 Surface Transportation Assistance Act (STAA).
 a = This is overhang from the back axle of the tandem axle assembly.
 b = Combined dimension is 19.4 ft and articulating section is 4 ft wide.
 c = Combined dimension is typically 10.0 ft.
 d = Combined dimension is typically 10.0 ft.
 e = Combined dimension is typically 12.5 ft.
 f = Dimensions are for a 150-200 hp tractor excluding any wagon length.
 g = To obtain the total length of tractor and one wagon, add 18.5 ft to tractor length. Wagon length is measured from front of drawbar to rear of wagon, and drawbar is 6.5 ft long.

- WB₁, WB₂, and WB₄ are the effective vehicle wheelbases, or distances between axle groups, starting at the front and working towards the back of each unit.
- S is the distance from the rear effective axle to the hitch point or point of articulation.
- T is the distance from the hitch point or point of articulation measured back to the center of the next axle or center of tandem axle assembly.

Exhibit 2-1. Design Vehicle Dimensions (Continued)

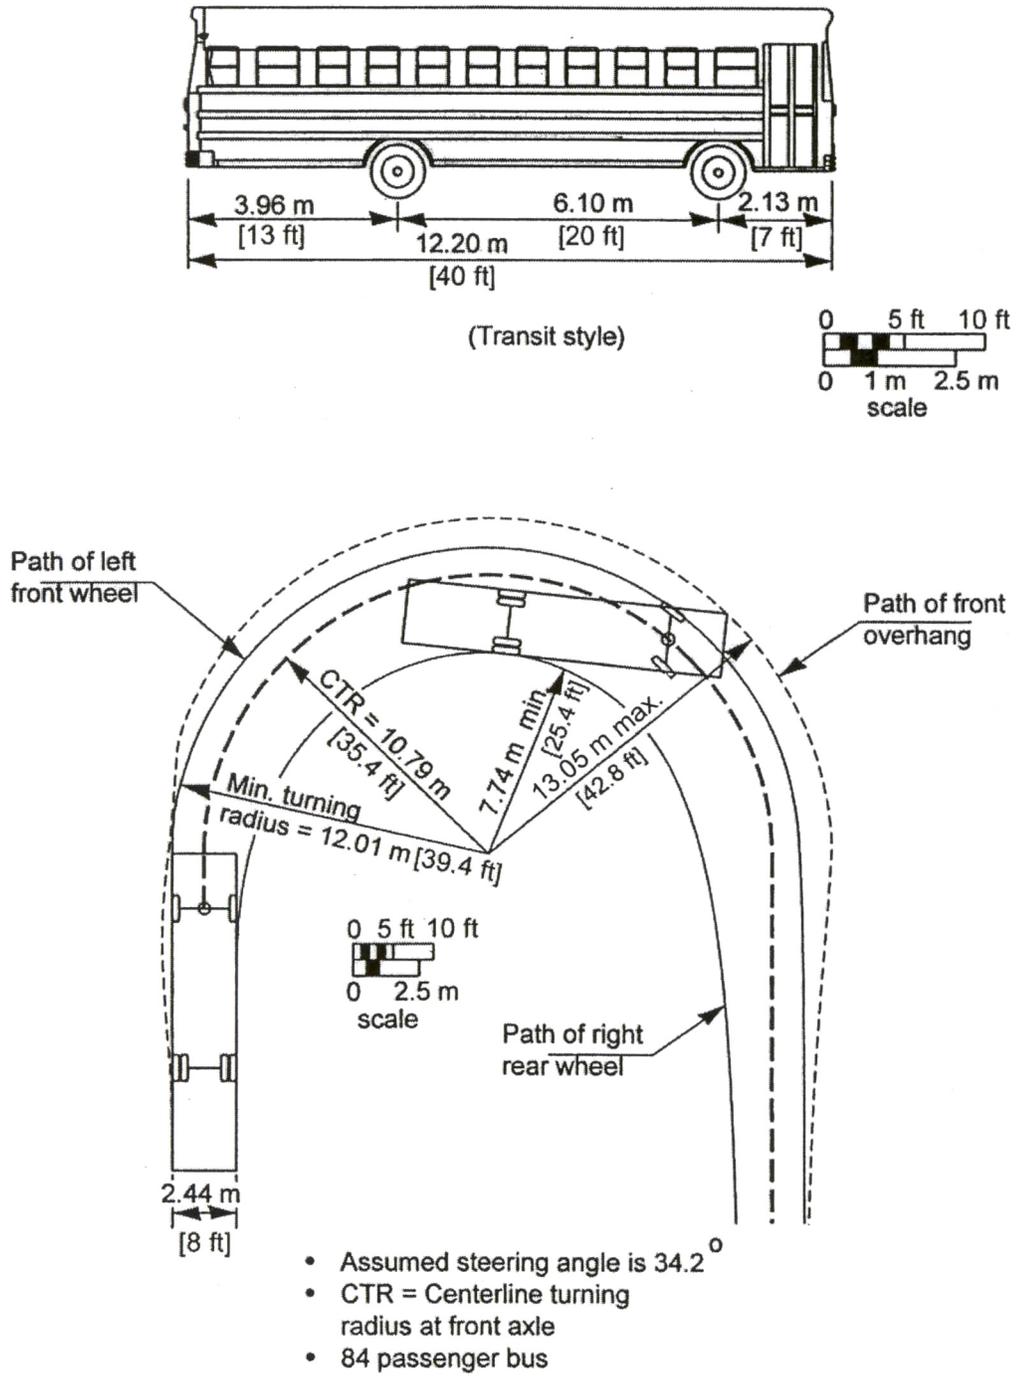


Exhibit 2-9. Minimum Turning Path for Large School Bus (S-BUS-12 [S-BUS-40]) Design Vehicle

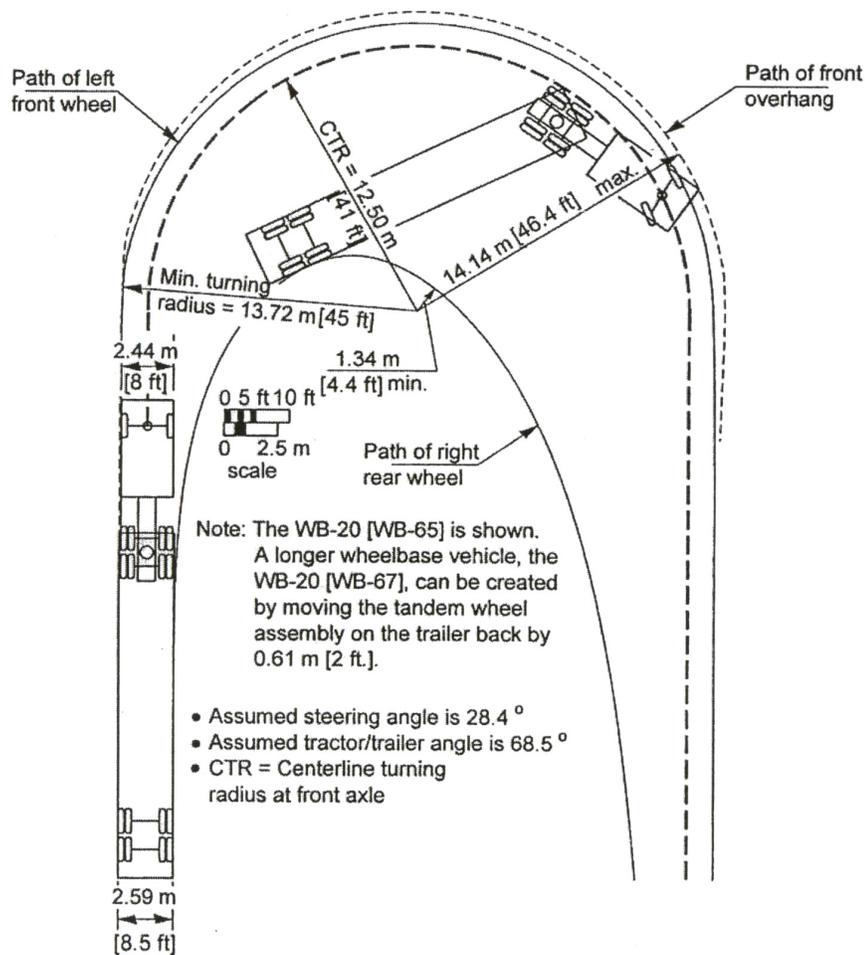
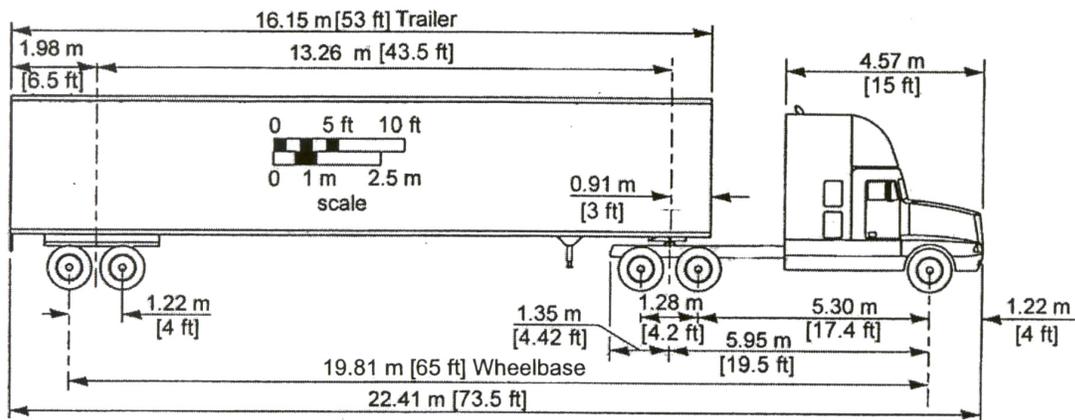


Exhibit 2-16. Minimum Turning Path for Interstate Semitrailer (WB-20 [WB-65 and WB-67]) Design Vehicle

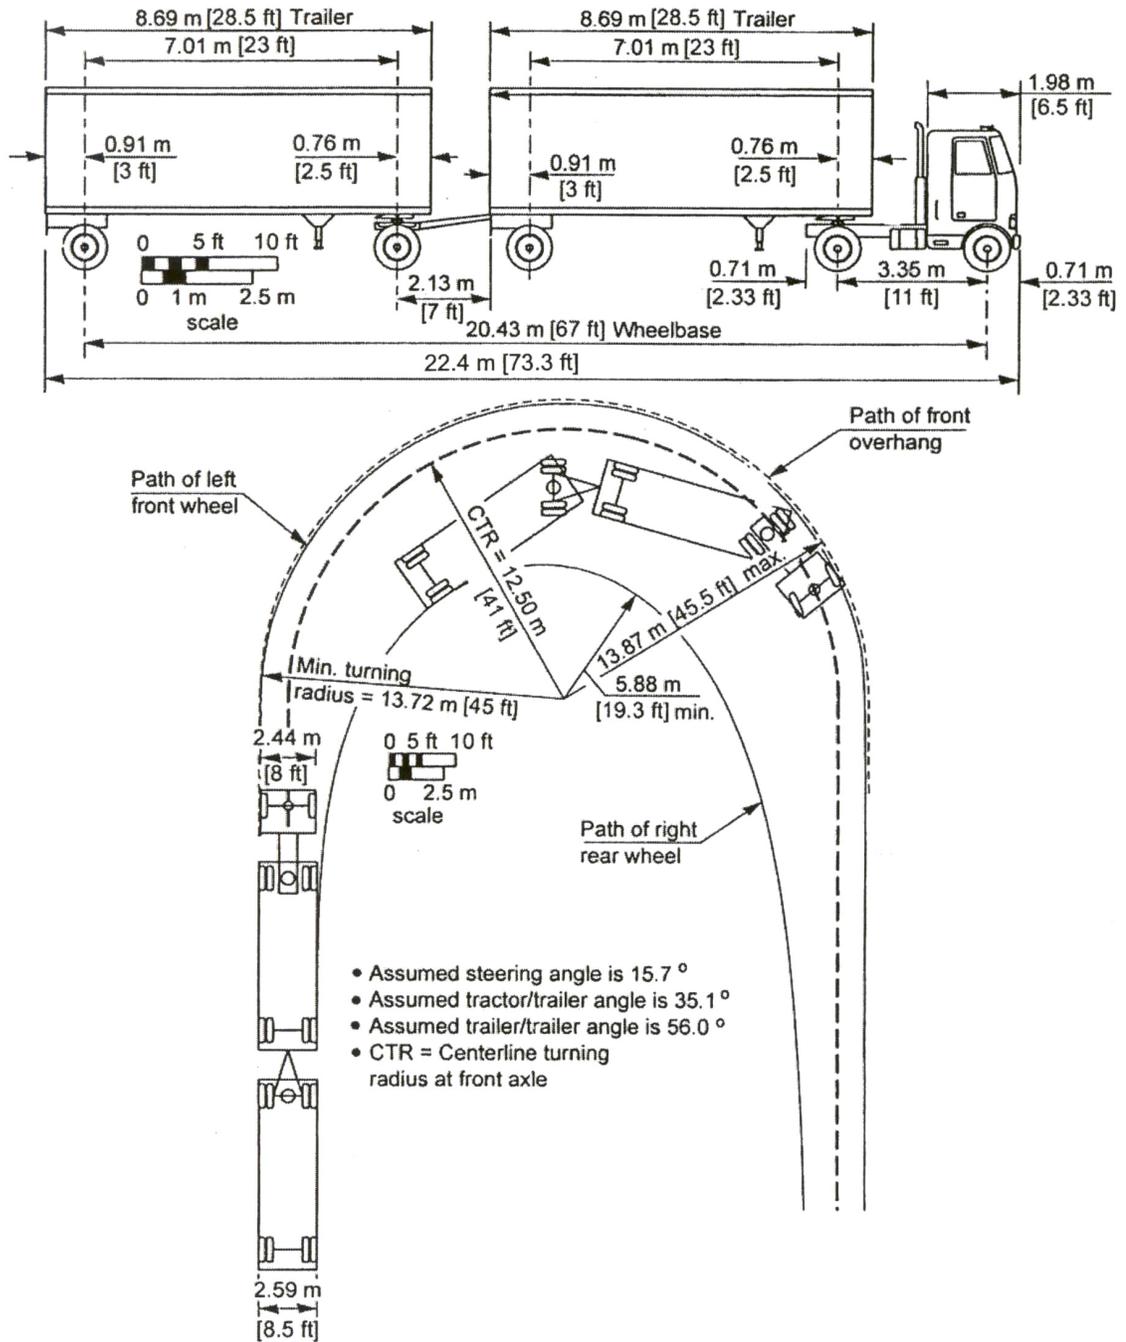


Exhibit 2-17. Minimum Turning Path for Double-Trailer Combination (WB-20D [WB-67D]) Design Vehicle




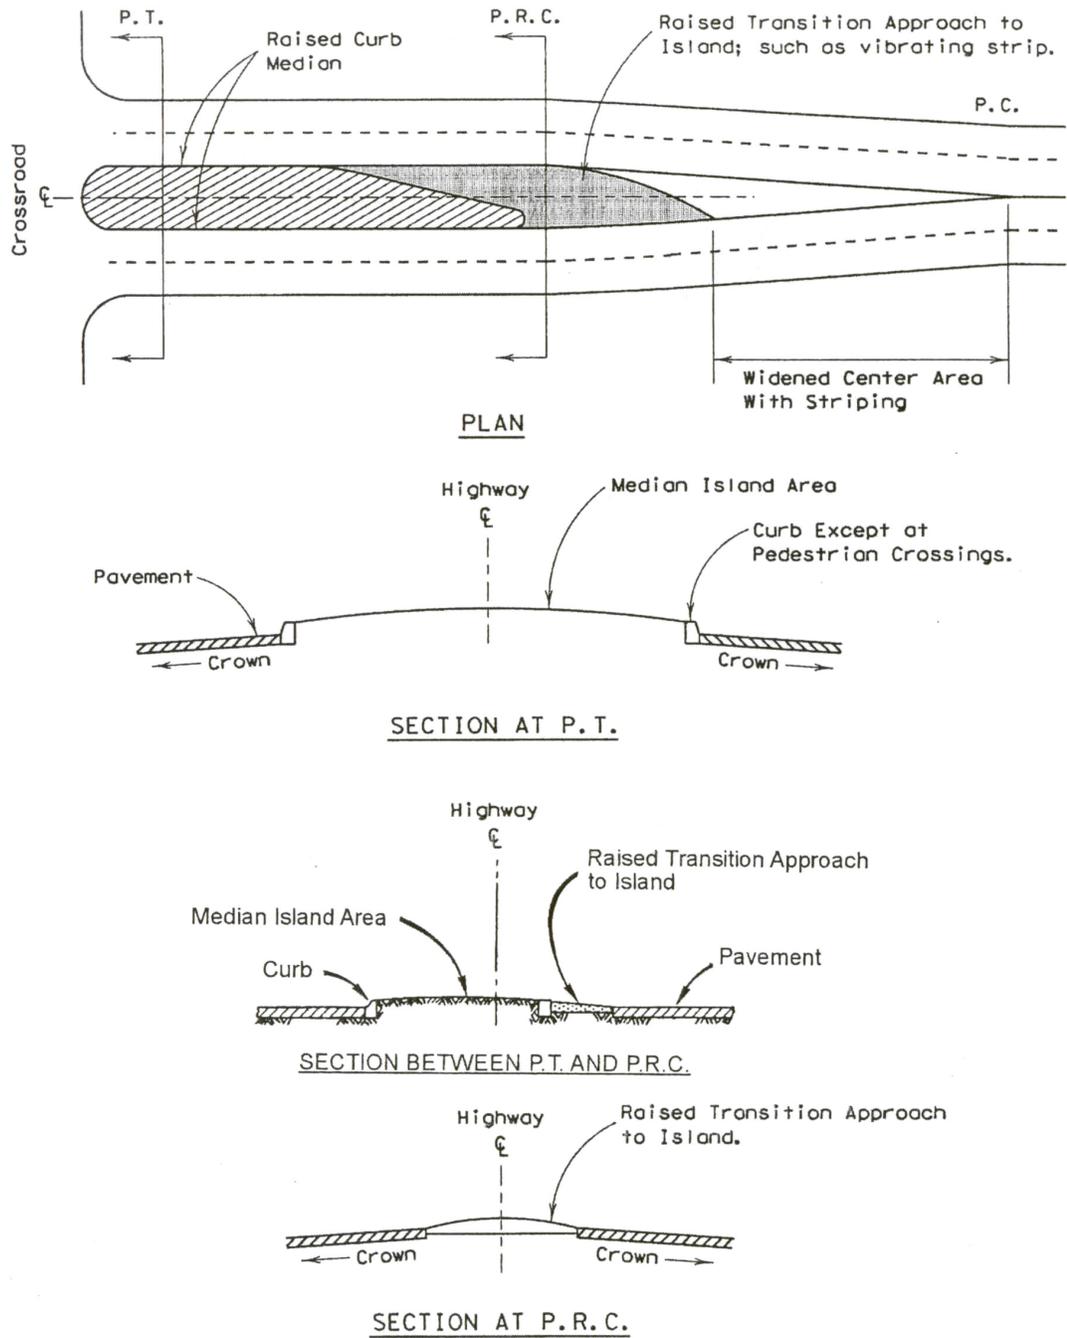


Exhibit 9-40. Details of Divisional Island Design

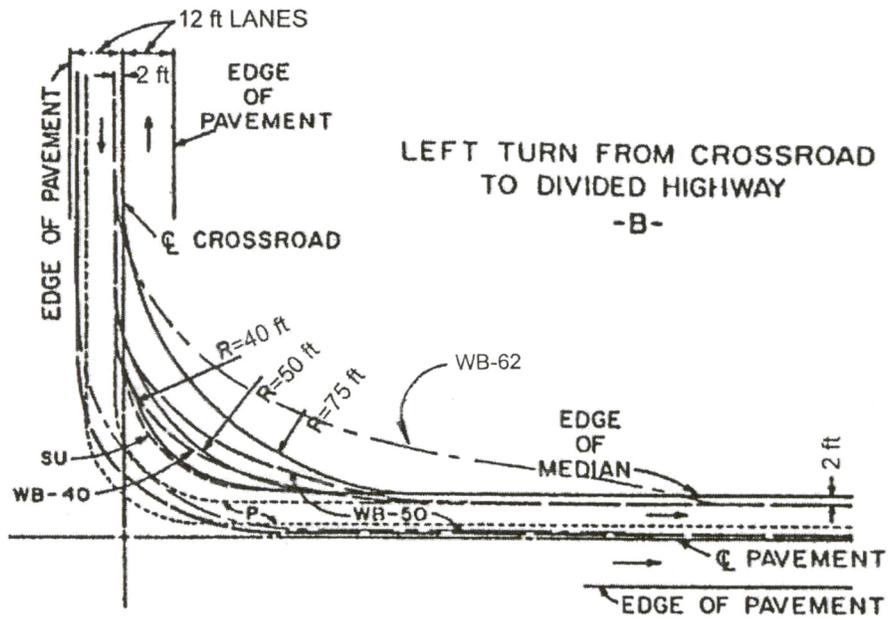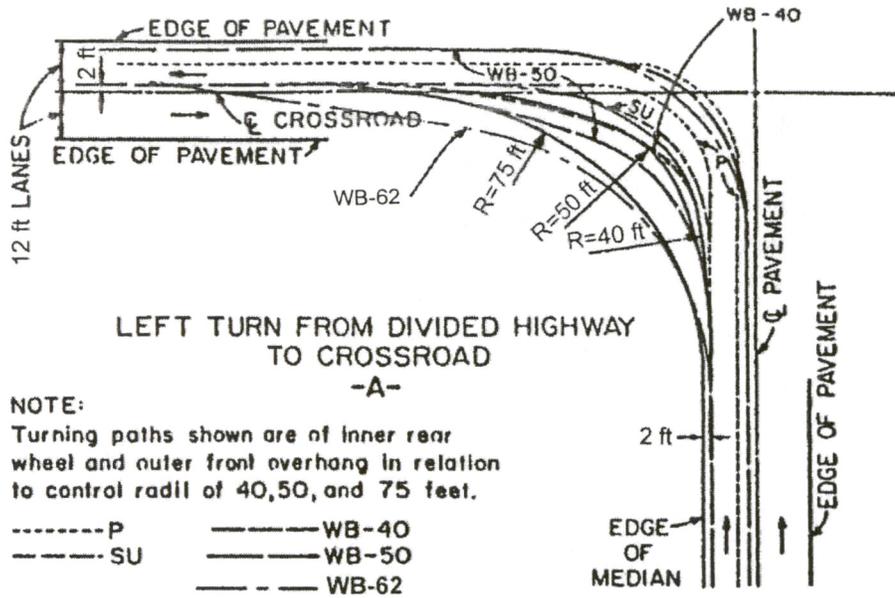


US Customary


Exhibit 9-76. Control Radii at Intersections for 90-Degree Left Turns (Continued)

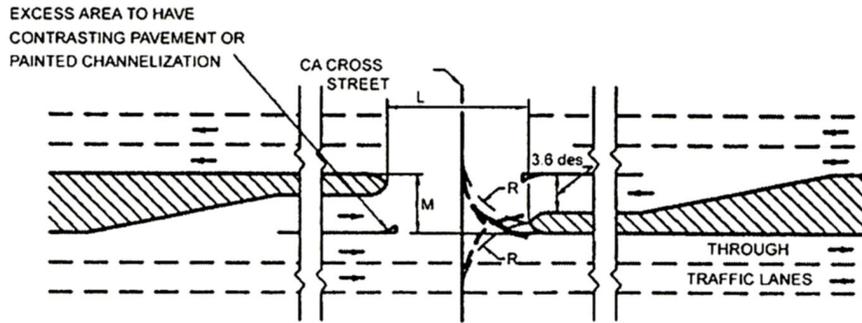

M = 5.4 m and over
-A-

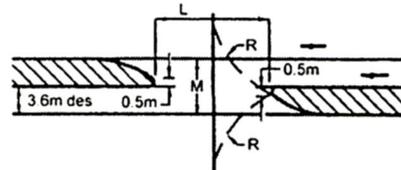

Metric
M = 5.4 m and over - Elongated taper
-B-

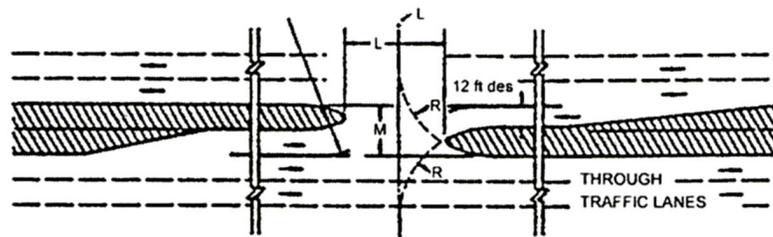


M = 18 ft and over
-A-

LEGEND

- M = Median width
- R = Control radius (conspicuous lane marking)
- L = Length of median opening

Note: Refer to Exhibits 9-77 through 9-83.

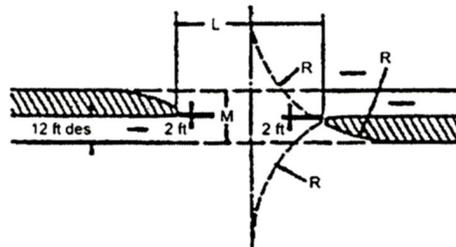

M = 18 ft and over - Elongated taper
-B-

US Customary

Exhibit 9-97. Median Left-Turn Design for Median Width in Excess of 5.4 m [18 ft]

**Revisions posted after the July 2003 meeting of the Task Force on Geometric Design
(to be incorporated into both the first and second printings of *A Policy on Geometric Design of Highways and Streets*, 4th Edition, 2001)**

| Page | Exhibit | Existing Text | Correction Made |
|-------------|----------------|--|---|
| 137 | 3-11 | The line labeled “Assumed for design—rural and high-speed urban highways” was plotted with incorrect values. | Revised Exhibit 3-11. See attached. |
| 188 | | The sentence that begins on the 4 th line of the 1 st paragraph reads “For an approximate guide, however, the minimum vertical curve length in meters [feet] can be used as numerically equal to the design speed in kilometers per hour [equal to the design speed in miles per hour].” | Revised the sentence to read “For an approximate guide, however, the minimum vertical curve length in meters [feet] can be used as numerically equal to 0.2 times the design speed in kilometers per hour [equal to the design speed in miles per hour].” |
| 400 | | In the section on Alleys, the last sentence of 3 rd paragraph reads “less than 2 percent.” | Revised the value to 0.2 percent. |
| 589– 590 | 9-19 | In both the Metric and the US Customary tables, the tapers are missing for the first three vehicles for the 105- and 120-degree turns. | Revised the tables to show that the tapers for 105-degree turns should be 8:1, 10:1, and 10:1 for P, SU, and WB-12 (WB-40), respectively, and that the tapers for 120-degree turns should be 10:1, 10:1, and 8:1 for P, SU, and WB-12 (WB-40), respectively. See attached. |
| 631 | | The first sentence of the second paragraph states that “Elongated or divisional islands should be not less than 1 m [4 ft] wide and . . .” | Changed “1 m” to “1.2 m.” |
| 718 | | Under Deceleration Length, the first paragraph contains incorrect values for deceleration lengths. | In the first paragraph under Deceleration Length, replace the text from the colon to end of sentence with the following: for design speeds of 50, 60, 70, 80, and 90 km/h [30, 40, 45, 50, and 55 mph], the limiting deceleration lengths of auxiliary lane are 50, 70, 95, 120, and 150 m [170, 275, 340, 410, and 485 ft], respectively (15). |

| | | | |
|-----|-------|--|--|
| 739 | 9-103 | The definition of terms under the formulas contained errors and omissions. | The formulas at the top of Exhibit 9-103 should be identical to those on the previous page. Replaced all definitions of terms under the formulas with the definition of terms from page 738. See attached. |
| 834 | | The paragraph numbered 3 refers to Exhibit 9-43. | Revised the reference to Exhibit 9-44. |
| 842 | | The second bullet contained errors in the 6 th and 8 th lines. | Revised “6.6 m [22 ft]” to “6.4 m [21 ft]” in the 6 th line. Revised “4.8 m [16 ft]” to “4.8 m [15 ft]” in the 8 th line. |

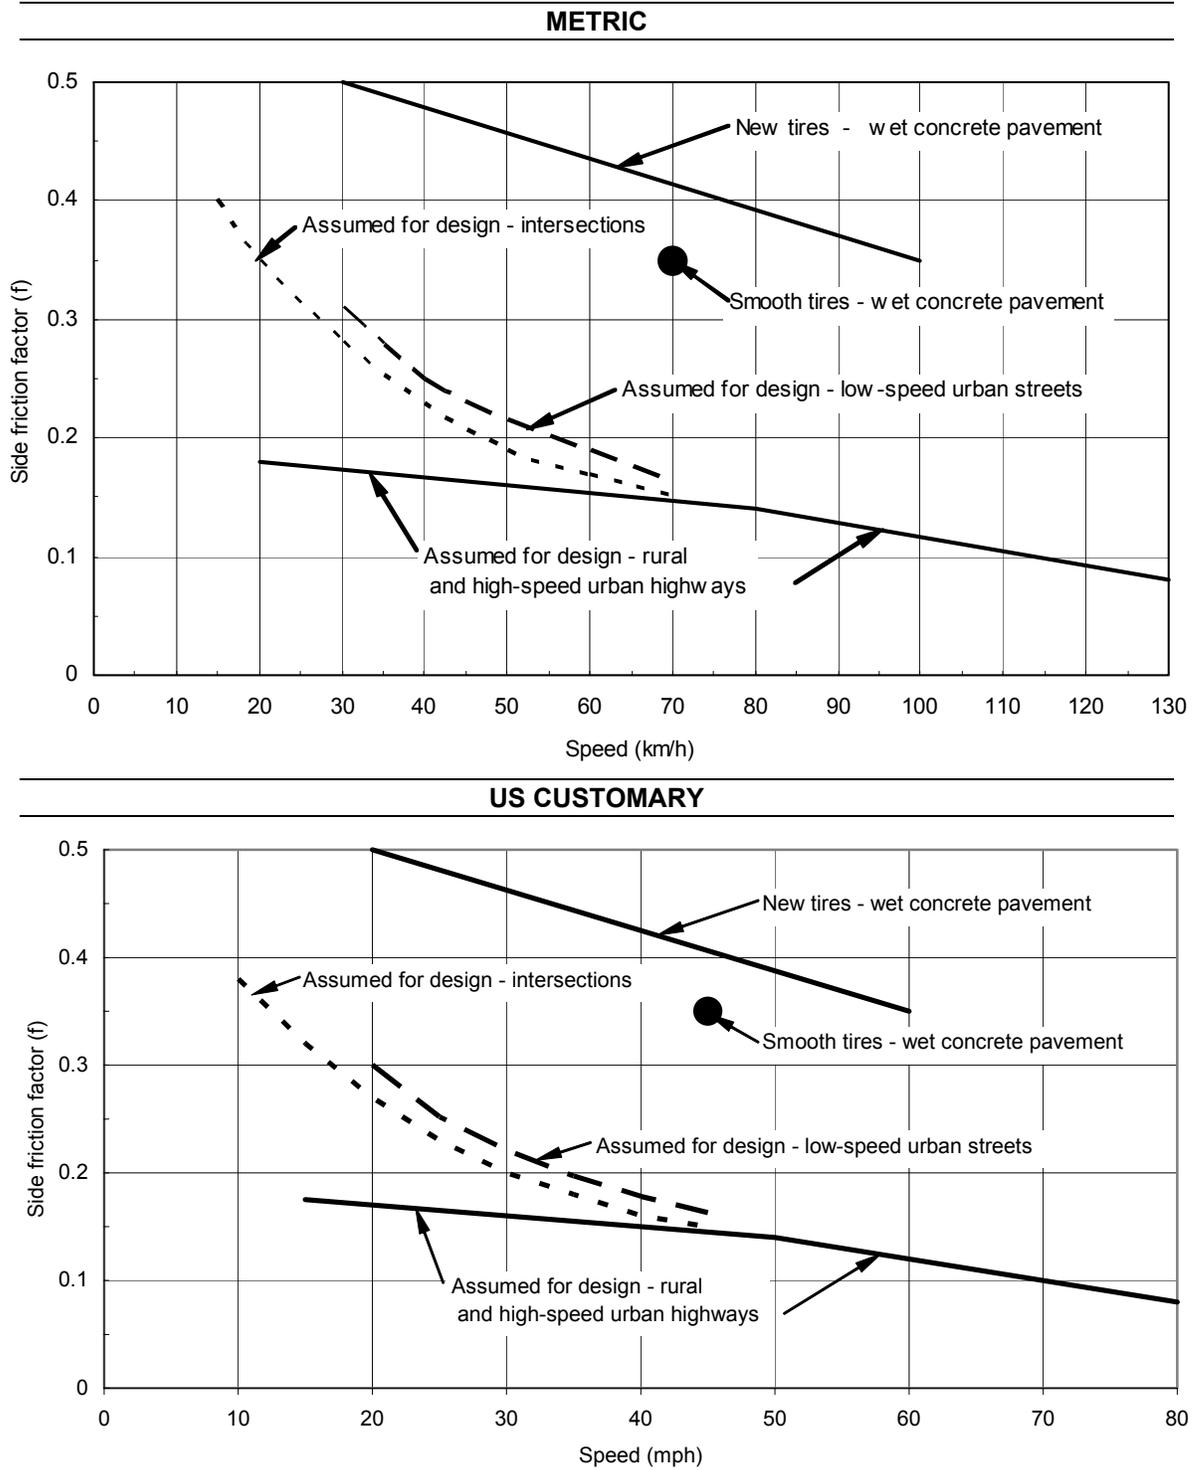


Exhibit 3-11. Comparison of Side Friction Factors Assumed for Design of Different Types of Facilities

| | | Metric | | | | | | US Customary | | | | | | | |
|-------------------------|----------------|--------------------------------|------------|-----------|-------------|-------------------------|----------------|--------------------------------|-----------|-------------|-------------|--------------------------|----------------|--------------------------------|------|
| Angle of turn (degrees) | Design vehicle | Simple curve radius with taper | | | | Simple curve radius (m) | Design vehicle | Simple curve radius with taper | | | | Simple curve radius (ft) | Design vehicle | Simple curve radius with taper | |
| | | Radius (m) | Offset (m) | Taper H:V | Radius (ft) | | | Offset (ft) | Taper H:V | Radius (ft) | Offset (ft) | | | Taper H:V | |
| 75 | P | 11 | 8 | 0.6 | 10:1 | 35 | P | 25 | 2.0 | 10:1 | 35 | P | 25 | 2.0 | 10:1 |
| | SU | 17 | 14 | 0.6 | 10:1 | 55 | SU | 45 | 2.0 | 10:1 | 55 | SU | 45 | 2.0 | 10:1 |
| | WB-12 | - | 18 | 0.6 | 15:1 | - | WB-40 | 60 | 2.0 | 15:1 | - | WB-40 | 60 | 2.0 | 15:1 |
| | WB-15 | - | 20 | 1.0 | 15:1 | - | WB-50 | 65 | 3.0 | 15:1 | - | WB-50 | 65 | 3.0 | 15:1 |
| | WB-19 | - | 43 | 1.2 | 20:1 | - | WB-62 | 145 | 4.0 | 20:1 | - | WB-62 | 145 | 4.0 | 20:1 |
| | WB-20 | - | 43 | 1.3 | 20:1 | - | WB-67 | 145 | 4.5 | 20:1 | - | WB-67 | 145 | 4.5 | 20:1 |
| | WB-30T | - | 26 | 1.0 | 15:1 | - | WB-100T | 85 | 3.0 | 15:1 | - | WB-100T | 85 | 3.0 | 15:1 |
| WB-33D | - | 42 | 1.7 | 20:1 | - | WB-109D | 140 | 5.5 | 20:1 | - | WB-109D | 140 | 5.5 | 20:1 | |
| 90 | P | 9 | 6 | 0.8 | 10:1 | 30 | P | 20 | 2.5 | 10:1 | 30 | P | 20 | 2.5 | 10:1 |
| | SU | 15 | 12 | 0.6 | 10:1 | 50 | SU | 40 | 2.0 | 10:1 | 50 | SU | 40 | 2.0 | 10:1 |
| | WB-12 | - | 14 | 1.2 | 10:1 | - | WB-40 | 45 | 4.0 | 10:1 | - | WB-40 | 45 | 4.0 | 10:1 |
| | WB-15 | - | 18 | 1.2 | 15:1 | - | WB-50 | 60 | 4.0 | 15:1 | - | WB-50 | 60 | 4.0 | 15:1 |
| | WB-19 | - | 36 | 1.3 | 30:1 | - | WB-62 | 120 | 4.5 | 30:1 | - | WB-62 | 120 | 4.5 | 30:1 |
| | WB-20 | - | 37 | 1.3 | 30:1 | - | WB-67 | 125 | 4.5 | 30:1 | - | WB-67 | 125 | 4.5 | 30:1 |
| | WB-30T | - | 25 | 0.8 | 15:1 | - | WB-100T | 85 | 2.5 | 15:1 | - | WB-100T | 85 | 2.5 | 15:1 |
| WB-33D | - | 35 | 0.9 | 15:1 | - | WB-109D | 115 | 2.9 | 15:1 | - | WB-109D | 115 | 2.9 | 15:1 | |
| 105 | P | - | 6 | 0.8 | 8:1 | - | P | 20 | 2.5 | 8:1 | - | P | 20 | 2.5 | 8:1 |
| | SU | - | 11 | 1.0 | 10:1 | - | SU | 35 | 3.0 | 10:1 | - | SU | 35 | 3.0 | 10:1 |
| | WB-12 | - | 12 | 1.2 | 10:1 | - | WB-40 | 40 | 4.0 | 10:1 | - | WB-40 | 40 | 4.0 | 10:1 |
| | WB-15 | - | 17 | 1.2 | 15:1 | - | WB-50 | 55 | 4.0 | 15:1 | - | WB-50 | 55 | 4.0 | 15:1 |
| | WB-19 | - | 35 | 1.0 | 15:1 | - | WB-62 | 115 | 3.0 | 15:1 | - | WB-62 | 115 | 3.0 | 15:1 |
| | WB-20 | - | 35 | 1.0 | 15:1 | - | WB-67 | 115 | 3.0 | 15:1 | - | WB-67 | 115 | 3.0 | 15:1 |
| | WB-30T | - | 22 | 1.0 | 15:1 | - | WB-100T | 75 | 3.0 | 15:1 | - | WB-100T | 75 | 3.0 | 15:1 |
| WB-33D | - | 28 | 2.8 | 20:1 | - | WB-109D | 90 | 9.2 | 20:1 | - | WB-109D | 90 | 9.2 | 20:1 | |

Exhibit 9-19. Edge-of-Traveled-Way Designs for Turns at Intersections (Continued)

| | | Metric | | | | | US Customary | | | | | |
|-------------------------|----------------|-------------------------|--------------------------------|------------|------------|-----------|-------------------------|----------------|--------------------------|--------------------------------|-------------|-----------|
| Angle of turn (degrees) | Design vehicle | Simple curve radius (m) | Simple curve radius with taper | | | Taper H:V | Angle of turn (degrees) | Design vehicle | Simple curve radius (ft) | Simple curve radius with taper | | |
| | | | Radius (m) | Offset (m) | Offset (m) | | | | | Radius (ft) | Offset (ft) | Taper H:V |
| 120 | P | - | 6 | 0.6 | 0.6 | 10:1 | P | - | 20 | 2.0 | 10:1 | |
| | SU | - | 9 | 1.0 | 1.0 | 10:1 | SU | - | 30 | 3.0 | 10:1 | |
| | WB-12 | - | 11 | 1.5 | 1.5 | 8:1 | WB-40 | - | 35 | 5.0 | 8:1 | |
| | WB-15 | - | 14 | 1.2 | 1.2 | 15:1 | WB-50 | - | 45 | 4.0 | 15:1 | |
| | WB-19 | - | 30 | 1.5 | 1.5 | 15:1 | WB-62 | - | 100 | 5.0 | 15:1 | |
| | WB-20 | - | 31 | 1.6 | 1.6 | 15:1 | WB-67 | - | 105 | 5.2 | 15:1 | |
| | WB-30T | - | 20 | 1.1 | 1.1 | 15:1 | WB-100T | - | 65 | 3.5 | 15:1 | |
| 135 | WB-33D | - | 26 | 2.8 | 2.8 | 20:1 | WB-109D | - | 85 | 9.2 | 20:1 | |
| | P | - | 6 | 0.5 | 0.5 | 10:1 | P | - | 20 | 1.5 | 10:1 | |
| | SU | - | 9 | 1.2 | 1.2 | 10:1 | SU | - | 30 | 4.0 | 10:1 | |
| | WB-12 | - | 9 | 2.5 | 2.5 | 15:1 | WB-40 | - | 30 | 8.0 | 15:1 | |
| | WB-15 | - | 12 | 2.0 | 2.0 | 15:1 | WB-50 | - | 40 | 6.0 | 15:1 | |
| | WB-19 | - | 24 | 1.5 | 1.5 | 20:1 | WB-62 | - | 80 | 5.0 | 20:1 | |
| | WB-20 | - | 25 | 1.6 | 1.6 | 20:1 | WB-67 | - | 85 | 5.2 | 20:1 | |
| 150 | WB-30T | - | 19 | 1.7 | 1.7 | 15:1 | WB-100T | - | 65 | 5.5 | 15:1 | |
| | WB-33D | - | 25 | 2.6 | 2.6 | 20:1 | WB-109D | - | 85 | 8.5 | 20:1 | |
| | P | - | 6 | 0.6 | 0.6 | 10:1 | P | - | 18 | 2.0 | 10:1 | |
| | SU | - | 9 | 1.2 | 1.2 | 8:1 | SU | - | 30 | 4.0 | 8:1 | |
| | WB-12 | - | 9 | 2.0 | 2.0 | 8:1 | WB-40 | - | 30 | 6.0 | 8:1 | |
| | WB-15 | - | 11 | 2.1 | 2.1 | 6:1 | WB-50 | - | 35 | 7.0 | 6:1 | |
| | WB-19 | - | 18 | 3.0 | 3.0 | 10:1 | WB-62 | - | 60 | 10.0 | 10:1 | |
| WB-20 | - | 19 | 3.1 | 3.1 | 10:1 | WB-67 | - | 65 | 10.2 | 10:1 | | |
| 10:1 | WB-30T | - | 19 | 2.2 | 2.2 | 10:1 | WB-100T | - | 65 | 7.3 | 10:1 | |
| | WB-33D | - | 20 | 4.6 | 4.6 | 10:1 | WB-109D | - | 65 | 15.1 | 10:1 | |

Exhibit 9-19. Edge-of-Traveled-Way Designs for Turns at Intersections (Continued)

Metric

US Customary

$$d_H = AV_v t + \frac{BV_v^2}{a} + D + d_e$$

$$d_H = AV_v t + \frac{BV_v^2}{a} + D + d_e$$

$$d_T = \frac{V_T}{V_V} \left[(A)V_v t + \frac{BV_v^2}{a} + 2D + L + W \right]$$

$$d_T = \frac{V_T}{V_V} \left[(A)V_v t + \frac{BV_v^2}{a} + 2D + L + W \right]$$

where:

where:

- A = constant = 0.278
- B = constant = 0.039
- d_H = sight-distance leg along the highway allows a vehicle proceeding to speed V_v to cross tracks even though a train is observed at a distance d_T from the crossing or to stop the vehicle without encroachment of the crossing area (m)
- d_T = sight-distance leg along the railroad tracks to permit the maneuvers described as for d_H (m)
- V_v = speed of the vehicle (km/h)
- V_T = speed of the train (km/h)
- t = perception/reaction time, which is assumed to be 2.5 s (This is the same value used in Chapter 3 to determine the stopping sight distance.)
- a = driver deceleration, which is assumed to be 3.4 m/s² (This is the same value used in Chapter 3 to determine stopping sight distance.)
- D = distance from the stop line or front of the vehicle to the nearest rail, which is assumed to be 4.5 m
- d_e = distance from the driver to the front of the vehicle, which is assumed to be 2.4 m
- L = length of vehicle, which is assumed to be 20 m
- W = distance between outer rails (for a single track, this value is 1.5 m)

- A = constant = 1.47
- B = constant = 1.075
- d_H = sight-distance leg along the highway allows a vehicle proceeding to speed V_v to cross tracks even though a train is observed at a distance d_T from the crossing or to stop the vehicle without encroachment of the crossing area (ft)
- d_T = sight-distance leg along the railroad tracks to permit the maneuvers described as for d_H (ft)
- V_v = speed of the vehicle (mph)
- V_T = speed of the train (mph)
- t = perception/reaction time, which is assumed to be 2.5 s (This is the same value used in Chapter 3 to determine the stopping sight distance.)
- a = driver deceleration, which is assumed to be 11.2 ft/s². (This is the same value used in Chapter 3 to determine stopping sight distance.)
- D = distance from the stop line or front of the vehicle to the nearest rail, which is assumed to be 15 ft
- d_e = distance from the driver to the front of the vehicle, which is assumed to be 8 ft
- L = length of vehicle, which is assumed to be 65 ft
- W = distance between outer rails (for a single track, this value is 5 ft)

Adjustments must be made for skewed crossings.
Assumed flat highway grades adjacent to and at crossings.

Adjustments must be made for skewed crossings.
Assumed flat highway grades adjacent to and at crossings.

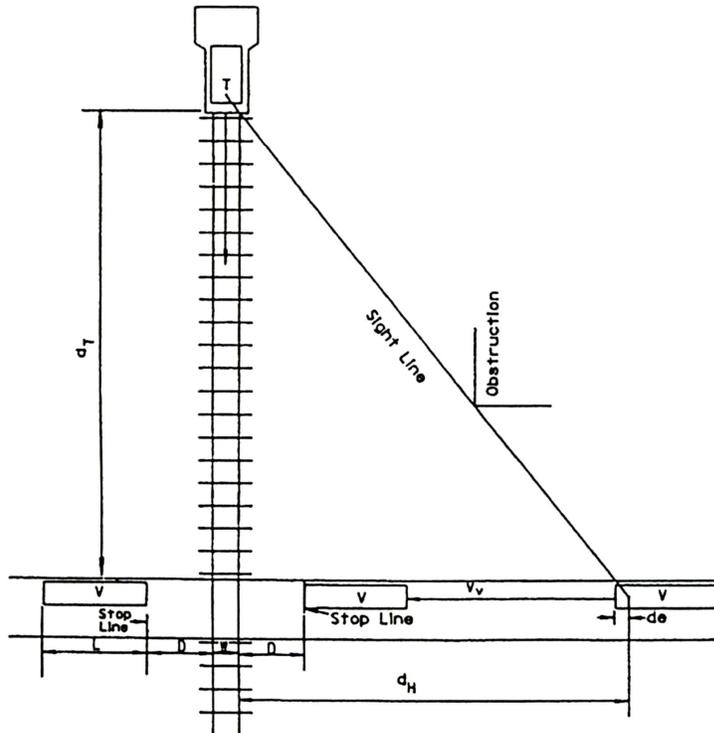


Exhibit 9-103. Case A: Moving Vehicle to Safely Cross or Stop at Railroad Crossing