




CURB AND GUTTER TYPE 2 (SECTION IB) (6 IN. BARRIER - 1 FT. GUTTER)




CURB AND GUTTER TYPE 2 (SECTION IIB) (6 IN. BARRIER - 2 FT. GUTTER)




GUTTER TYPE 2



CURB AND GUTTER TYPE 2 (SECTION IM) (6 IN. MOUNTABLE - 1 FT. GUTTER)




CURB AND GUTTER TYPE 2 (SECTION IIM) (6 IN. MOUNTABLE - 2 FT. GUTTER)




CURB AND GUTTER TYPE 2 (SECTION MS) (4 IN. MOUNTABLE WITH SIDEWALK)

JBK




CONCRETE SIDEWALK



NOTES: 1. EXPANSION JOINTS SHALL BE PLACED IN THE SIDEWALK AT INTERVALS OF NOT MORE THAN 500 FT.

2. EXPANSION JOINTS MAY BE SEALED WHEN SPECIFIED ON THE PLANS.





7. INCREASE SIDEWALK THICKNESS TO 6 IN. AT LOCATIONS SHOWN ON THE PLANS. 8. MINIMUM SIDEWALK WIDTH IS 4 FT.

CONCRETE IF PLACED MONOLITHICALLY WITH CONCRETE PAVEMENT.

RADIUS IS GREATER THAN 1,900 FT. 2. CONCRETE SHALL BE CLASS B.

GRADES AS SHOWN ON THE PLANS.

GENERAL NOTES 1. ON ROADWAY CURVES WITH A RADIUS OF 1,900 FT. OR LESS, CURBS AND GUTTERS ARE TO BE PLACED ON THE ARC OF THE CURVE, UNLESS OTHERWISE NOTED ON THE PLANS. A MAXIMUM CHORD LENGTH OF 10 FT. MAY BE USED WHEN THE CURVE

3. PROFILE GRADE OF CURBS AND GUTTERS SHALL BE LOCATED AT THE FLOW LINE. 4. CURB TYPE 4 (KEY-WAY) MAY BE USED IN LIEU OF CURB AND GUTTER TYPE 2 (SECTIONS IB AND IM) UNLESS OTHERWISE SPECIFIED ON THE PLANS.

5. GUTTER CROSS SLOPES MAY BE ADJUSTED TO FACILITATE DRAINAGE FOR PROFILE


6. THICKNESS OF CURB AND GUTTER SECTION SHALL MATCH CONCRETE PAVEMENT


THICKNESS IF SHOWN ON THE PLANS. CURB AND GUTTER SHALL BE CLASS P

- \blacktriangle EXPANSION JOINTS SHALL BE INSTALLED WHEN ABUTTING EXISTING CONCRETE OR FIXED STRUCTURE. EXPANSION JOINT MATERIAL SHALL BE 1/2 IN. THICK AND SHALL EXTEND THE FULL DEPTH OF CONTACT SURFACE.
- GUTTER CROSS SLOPES SHALL BE $\frac{1}{2}$ IN./FT. WHEN DRAINING AWAY FROM CURB AND 1 IN./FT. WHEN DRAINING TOWARD CURB (WITH EXCEPTION TO IMMEDIATELY ADJACENT TO CURB RAMPS - SEE STANDARD PLAN M-608-1 FOR SLOPE REQUIREMENTS).
- WHEN TIE BARS ARE REQUIRED, THE GUTTER THICKNESS SHALL BE INCREASED TO THE PAVEMENT THICKNESS (T). BARS SHALL BE EPOXY-COATED #4 CONFORMING TO AASHTO M 284 AND SPACED AT 3 FT. INTERVALS. THEY SHALL BE INSERTED T_{2} AND 1#2 LENGTH INTO THE GUTTER.

LEGEND

FOR RADII $A = \frac{1}{8}$ " TO $\frac{1}{4}$ "



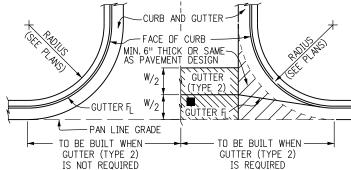

THIS AREA SHALL BE POURED MONOLITHICALLY WITH CURB AND GUTTER AND PAID FOR AS "CONCRETE PAVEMENT".

 \blacksquare FLOW LINE LOCATION WILL BE ESTABLISHED BY $rac{W}{2}$ SHOWN ON PLANS.

CONSTRUCTION OF CONCRETE GUTTERS AT INTERSECTION

Computer File Information	
Creation Date: 07/31/19	
Designer Initials: JBK	
Last Modification Date: 07/31/19	(
Detailer Initials: LTA	(
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English	

	Sheet Revisions		
	Date:	Comments	
\mathbb{R} -X			
$\overline{R-X}$			
$\overline{R-X}$			
(R-X)			

Colorado Department of Transportation 2829 West Howard Place



CDDT HQ, 3rd Floor Denver, CD 80204 Phone: 303-757-9021 FAX: 303-757-9868

Project Development Branch


CURB, GUTTERS, AND SIDEWAL

M-609-1 Standard Sheet No. 1 of 4

STANDARD PLAN NO.


Issued by the Project Development Branch: July 31, 2019

Project Sheet Number:

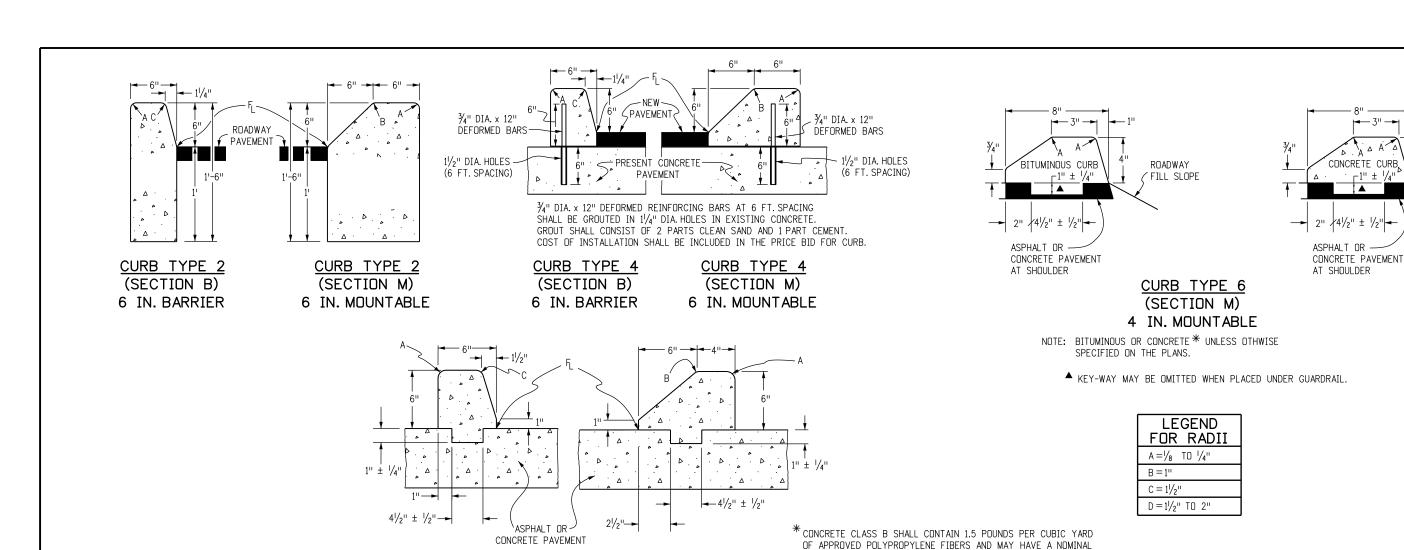

(SECTION M)

CURB TYPE 4 (KEY-WAY)

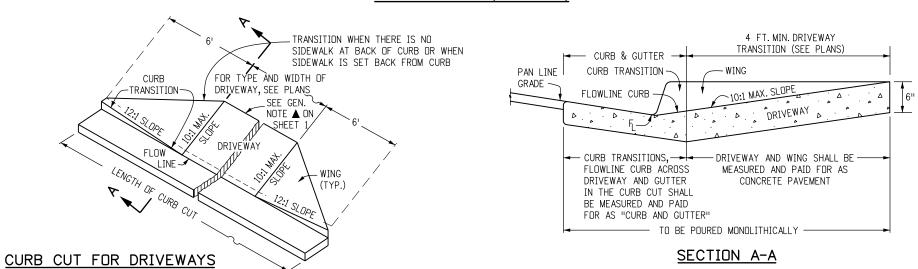

POURED JOINT ├---- |/8" TO |/4" MATERIAL

NOTE: RECOMMENED JOINT SPACING IS EVERY 8 FOOT ALONG THE WIDTH AND LENGTH OF DRIVEWAY. FOR DRIVEWAYS WIDER THAN 12 FEET, JOINTS ARE REQUIRED.

TRANSVERSE CONTRACTION JOINT FOR CONCRETE PAVEMENT (DRIVEWAYS)

CONCRETE PAVEMENT (DRIVEWAYS)

AGGREGATE SIZE OF 3/8 IN.

Computer File Information			Sheet Revi
Creation Date: 07/31/19		Date:	Cor
Designer Initials: JBK	$\overline{\mathbb{R}-X}$		
Last Modification Date: 07/31/19	$\overline{R-X}$		
Detailer Initials: LTA	$\overline{R-X}$		
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English	(R-X)		

(WITHOUT ATTACHED SIDEWALK)

		Sheet Revisions	_
	Date:	Comments	_
(R-X)			
\mathbb{R} -X			_
\mathbb{R} -X			_
(R-X)			_

(SECTION B)

Colorado Department of Transportation



2829 West Howard Place CDOT HQ, 3rd Floor Denver, CO 80204 Phone: 303-757-9021 FAX: 303-757-9868 JBK

roject Development Branch

CURB, GUTTERS,
AND SIDEWALKS

M-609-1
Standard Sheet No. 2 of 4


STANDARD PLAN NO.


ROADWAY

(FILL SLOPE


Issued by the Project Development Branch: July 31, 2019


Project Sheet Number:

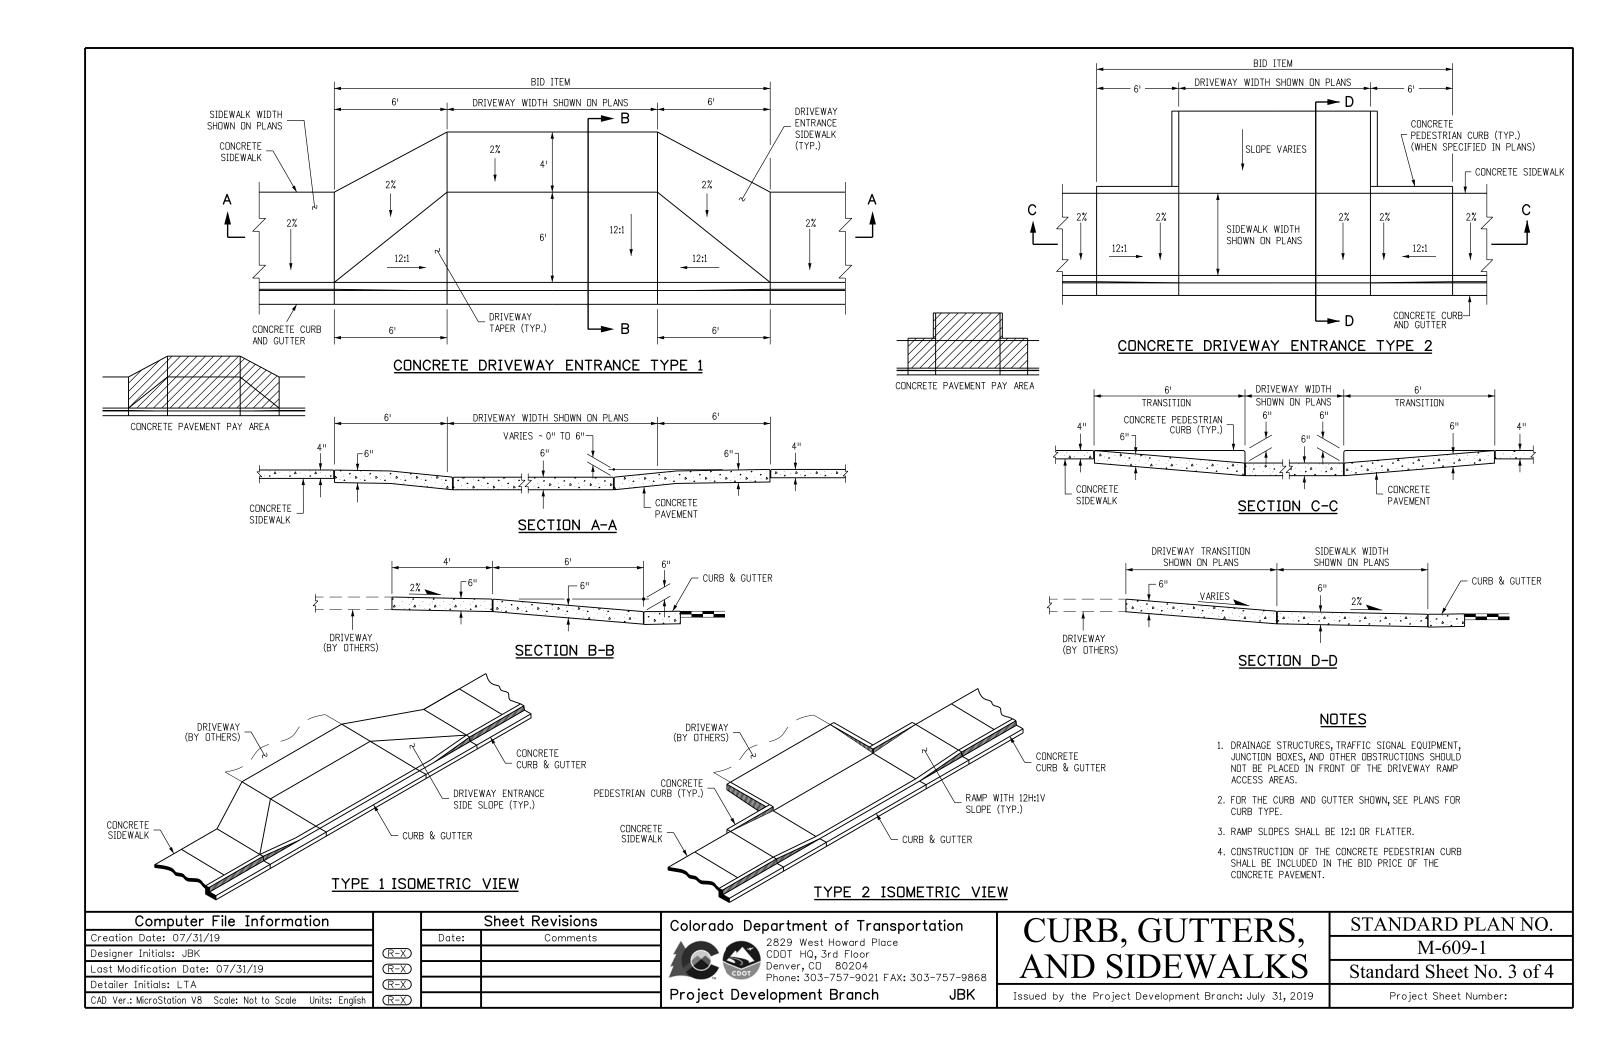

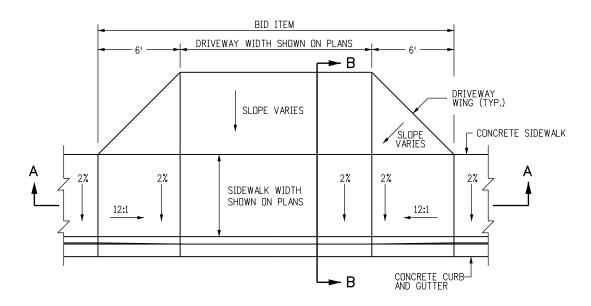

CONCRETE DRIVEWAY ENTRANCE TYPE 3

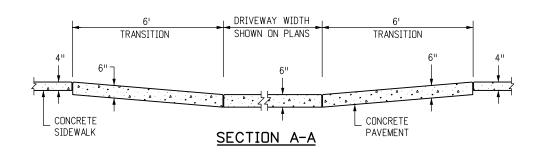




NOTES

- 1. DRAINAGE STRUCTURES, TRAFFIC SIGNAL EQUIPMENT, JUNCTION BOXES, AND OTHER OBSTRUCTIONS SHOULD NOT BE PLACED IN FRONT OF THE DRIVEWAY RAMP ACCESS AREAS.
- 2. FOR THE CURB AND GUTTER SHOWN, SEE PLANS FOR CURB TYPE.
- 3. RAMP SLOPES SHALL BE 12:1 OR FLATTER.



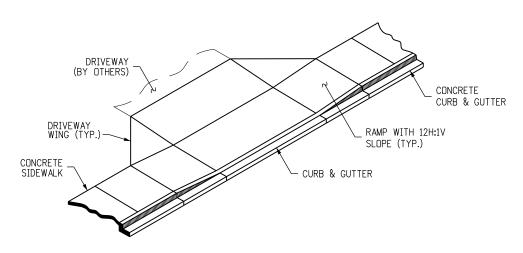

TYPE 3 ISOMETRIC VIEW

Computer File Information		Sheet Revisions		
Creation Date: 07/31/19		Date:	Comments	
Designer Initials: JBK	\mathbb{R} -X			
Last Modification Date: 07/31/19	\mathbb{R} -X			
Detailer Initials: LTA	R-X			
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English	R-X			

Colorado Department of Transportation



2829 West Howard Place CDDT HQ, 3rd Floor Denver, CD 80204 Phone: 303-757-9021 FAX: 303-757-9868

JBK

Project Development Branch

CURB, GUTTERS,
AND SIDEWALKS

M-609-1 Standard Sheet No. 4 of 4

STANDARD PLAN NO.

Issued by the Project Development Branch: July 31, 2019

Project Sheet Number: