

GENERAL NOTES

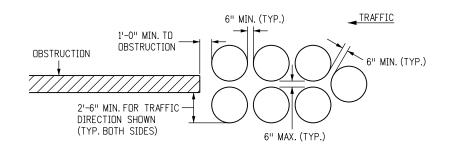

UNIDIRECTIONAL

- 1. SAND SHALL BE MIXED WITH 5% SALT BY WEIGHT.
- 2. WHEN ARRAYS ARE PLACED ON STRUCTURES WHERE THE VIBRATIONS FROM MOVING TRAFFIC MAY CAUSE THE MODULES TO SHIFT, STEEL OR FORMED-IN-PLACE HMA HALF-RINGS MAY BE PLACED ON THE DOWNHILL SIDE OF THE MODULES TO PREVENT MOVEMENT. NAILS OR BOLTS MAY BE PLACED THROUGH THE BOTTOM OF THE OUTER CONTAINER INTO THE ROADWAY TO PREVENT MODULE MOVEMENT.
- 3. OFFSET THE ARRAY TO AVOID IMPACT TO THE REAR MODULE FROM WRONG-WAY VEHICLES.
- 4. ARRAYS SHALL NOT BE PLACED ON SLOPES WITH LATERAL OR HORIZONTAL GRADES OF 5% OR GREATER.

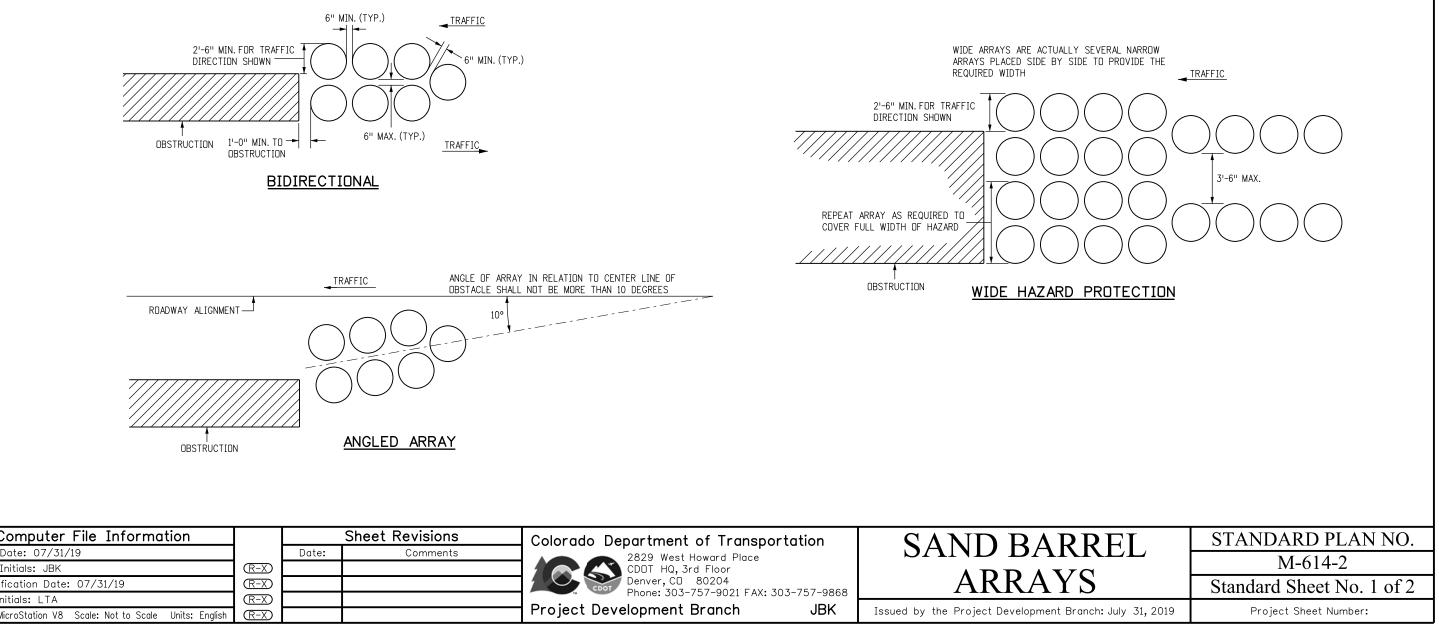

Computer File Information		Sheet Revisions		Colorado Department of Transportation	CAND DAI	
Creation Date: 07/31/19		Date:	Comments		SAND DAR	
Designer Initials: JBK	(R-X)			2829 West Howard Place CDDT HQ, 3rd Floor		
Last Modification Date: 07/31/19	(R-X)			Denver, CD 80204 Phone: 303-757-9021 FAX: 303	4-757-9868	ARRAY
Detailer Initials: LTA	R-X)					
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English	(R-X)			Project Development Branch	JBK	Issued by the Project Development I

5. CURBS AND RAISED ISLANDS SHALL BE NO MORE THAN 4 IN. HIGH. 6. FOUNDATION PADS SHALL BE FLAT AND MADE OF 6 IN. THICK CONCRETE OR HMA. 7. INTERMIXING OF DIFFERENT BRANDS OF MODULES ARE ACCEPTABLE, IF THE MODULES ARE FHWA APPROVED, AND THE ARRAY MEETS THE DESIGN CRITERIA.

8. ARRAY CONFIGURATION MAY VARY IN LAYOUT AND SAND WEIGHT (LBS) PROVIDED THEY CONFORM TO MANUFACTURER'S DETAILS.

