GENERAL NOTES

1. FRAME CONNECTIONS * (A1)

CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English

A. SILL AND FRAME ASSEMBLY CONNECTIONS SHALL BE MADE WITH $\frac{1}{2}$ IN. DIA. MACHINE BOLTS (A 307) WITH A MINIMUM OF $\frac{1}{4}$ IN. USABLE THREAD LENGTH. NYLON INSERT LOCKNUTS SHALL BE PROVIDED WITH EACH BOLT. BOLT LENGTHS INDICATED HEREIN ARE BASED ON THE MOST TYPICAL WOOD THICKNESS ENCOUNTERED. BECAUSE OF THE VARIANCE OF ROUGH SAWN WOOD THICKNESS. IT MAY BE NECESSARY TO PROVIDE BOLTS OF DIFFERENT LENGTHS,

ADDITIONAL WASHERS, OR BOTH TO MEET THE FOLLOWING REQUIREMENTS.

- B. BOLTED CONNECTIONS SHALL BE TIGHTENED TO A CLAMP TIGHT CONDITION. DO NOT CRUSH WOOD FIBERS BY OVER TIGHTENING CONNECTIONS. AFTER THE CONNECTIONS ARE TIGHTENED, THE LOCKOUT SHALL BE COMPLETELY THREADED ON THE BOLT WITH A MINIMUM OF ONE THREAD PROTRUDING BEYOND THE NUT, AND A MAXIMUM OF $\frac{1}{2}$ IN. OF THE THREAD PROTRUDING BEYOND THE NUT. ADDITIONAL WASHERS MAY BE REQUIRED TO SHIM THE CONNECTION SO THAT NO MORE THAN 1/2 IN. OF THREAD PROTRUDES. THIS REQUIREMENT PROVIDES A MINIMUM OF 1/4 IN. OF THREAD REMAINING FOR FURTHER TIGHTENING AS THE WOOD CONTINUES TO WEATHER.
- 2. <u>SLAT FASTENING</u> (B)


SLATS SHALL BE ATTACHED TO EACH FRONT VERTICAL FRAME WITH 2-10D RING SHANK OR SCREW SHANK NAILS (FULL-HEAD). THE USE OF NAILING GUNS IS ACCEPTABLE.


3. CROSS BRACE AND SLOPE BRACE FASTENING (C)


I xxxxxx

- A. CROSS BRACES SHALL BE FASTENED TO SLATS WITH 2-8D COMMON NAILS AT EACH LOCATION AND SHALL BE CLINCHED.
- B. SLOPE BRACES ARE REQUIRED IF THE GROUND SLOPE IS 5:1 OR STEEPER. WHEN THE SLOPE BRACE IS REQUIRED, IT SHALL BE ATTACHED IN THE SAME MANNER AS THE CROSS BRACE.
- 4. ANCHORS ▲
- A. THE ENDS OF EACH SILL SHALL BE ANCHORED WITH A DRIVEN #6 REBAR CLAMPED TO THE SILL WITH AN ANCHOR CLIP AS SHOWN IN THE DETAILS ON SHEET 2.
- B. WHERE REBARS CANNOT BE DRIVEN AS SPECIFIED DUE TO ROCK CONDITIONS, REBAR SHALL BE ANCHORED IN THE ROCK. A 1/8 IN. DIA. HOLE SHALL BE DRILLED A MINIMUM OF 6 IN. INTO SOLID ROCK AND ALL LOOSE MATERIAL AND DUST REMOVED. THE REBAR SHALL BE INSTALLED WITH AN APPROVED EPOXY GROUT IN CONFORMANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
- C. THE ROCK ANCHOR SHALL BE FASTENED TO THE FRAME AS SHOWN IN THE PLANS EXCEPT THAT THE ANCHOR MAY BE PERPENDICULAR TO THE SILL. IF NO ANCHORS CAN BE DRIVEN, FOUR ROCK ANCHORS, TWO FOR EACH OUTER SILL, SHALL BE INSTALLED PER PANEL.
- D. SOIL REMOVED PRIOR TO DRILLING SHALL BE REPLACED AND COMPACTED.


- 5. LINE POSTS (7)
 - A. TWO LINE POSTS SHALL BE PLACED AT THE ENDS OF EACH RUN OF SNOW FENCE AS SHOWN.
 - ▲ SEE ANCHOR CLIP CONNECTION DETAILS ON SHEET 2.
 - * SEE FRAME CONNECTION DETAIL ON SHEET 2.

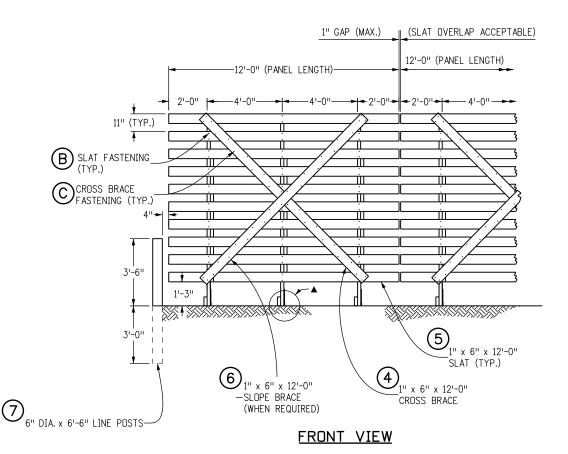

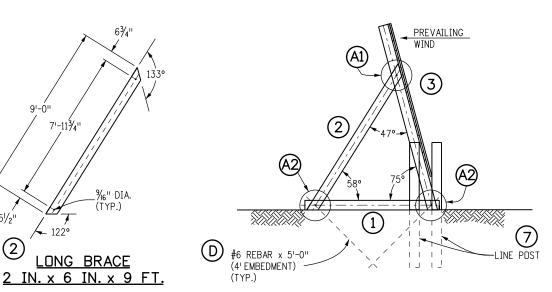



END VIEW



Computer File Information	Sheet Revisions
Creation Date: 07/31/19	R-X mm/dd/yy XXXXXXX XXXXXX
Designer Initials: JBK	R-X mm/dd/yy XXXXXXX XXXXXX
Last Modification Date: 07/31/19	R-X mm/dd/yy XXXXXXX XXXXXX
Detailer Initials: LTA	R-X mm/dd/yy XXXXXXXX XXXXXXX

R-X mm/dd/yy XXXXXXX



	Street Address Office location		No
CDOT	City, CO Zip code Phone: XXX-XXX-XXXX	Fax: XXX-XXX-XXXX	Re
Region, Unit		Intials/Intials	۷٥

As Cor	nstructed	WOOD SNOW FENCE		Project No./Code		
No Revisions:	mm/dd/yy	10 FOOT HIGH		XXXXX/XXXX		
Revised:	mm/dd/yy	Designer:	Designer: XXXXXXXX		D-607-11	
		Detailer:	XXXXXXX			Sheet Number: 1 of 2
Void:	mm/dd/yy	Sheet Subset:	XXXXXXX	Subset Sheets:	XXX of XXX	Project Sheet Number: XX

LUMBER FOR ONE 12 FT. WIDE PANEL

ITEM NO.	NO.OF PIECES	LUMBER SIZE	DESCRIPTION				
1	3	2" x 6" x 7'-0"	SILL				
2	3	2" x 6" x 9'-0"	LONG BRACE				
3	3	2" x 6" x 10'-0"	FRONT VERTICAL				
7	A 4	6" DIA. (MIN.) x 6'-6"	LINE POST				
FRAME MEMBERS 1, 2, 3 AND 7 SHALL BE PRESSURE TREATED LUMBER IN ACCORDANCE WITH SUBSECTION 710.08 (AASHTO M133).							
4	1	1" x 6" x 12'-0"	CROSS BRACE				
5	10	1" x 6" x 12'-0"	SLAT				
6	1	1" x 6" x 12'-0"	SLOPE BRACE				


NOTE: SLOPE BRACE (6) IS REQUIRED WHEN GROUND SLOPE IS 5:1 OR STEEPER

▲ NOTE: TWO LINE POSTS SHALL BE PLACED AT THE ENDS OF EACH RUN OF SNOW FENCE.

 ∇ USE ALKALINE COPPER (ACQ) OR COPPER AZOLE (CBA) FOR THE PRESSURE TREATED PORTIONS OF THE FENCE UNLESS CHROMATED COPPER ARSENATE (CCA) IS APPROVED BY THE ENGINEER.

DNE THREAD (MIN.) ADDITIONAL WASHERS IF NECESSARY BOLTING DETAIL

A MINIMUM OF $\frac{1}{4}$ IN. OF THREAD SHALL REMAIN FOR FURTHER TIGHTENING.

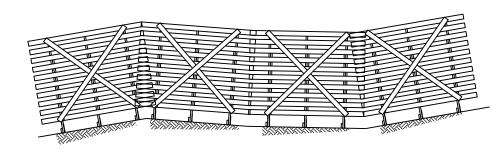

PANEL LAPPING DETAIL


NOTE: PANELS SHALL BE OVERLAPPED. A MAXIMUM 1 IN. GAP IS ACCEPTABLE. SEE FRONT VIEW ON SHEET 1.



NOTE	QUANTITY	DESCRIPTION
A2	Ø 6	$^{\prime\prime}_{2}$ " DIA.x 6" MACHINE BOLT WITH 1 OR MORE FLAT WASHERS (MIN.) AND 1 NYLON INSERT LOCKDUT
A1	Ø 3	$^{\prime\prime}_2$ " DIA.x 5" MACHINE BOLT WITH 2 OR MORE FLAT WASHERS (MIN.) AND 1 NYLON INSERT LOCKOUT
В	60	10D RING SHANK OR SCREW SHANK NAILS (FULL HEAD) WITH 2 OR MORE FLAT WASHERS
С	* 22	8D COMMON NAILS
	6	#6 x 5'-0" REBAR
	6	5" x $1^{1}\!\!/_{\!2}$ " x $1^{1}\!\!/_{\!8}$ " ANCHOR CLIP FOR $1^{1}\!\!/_{\!2}$ " DIA. BOLT


* 44 IF SLOPE BRACE IS USED

- B SLAT FASTENING
- C CROSS BRACE AND SLOPE BRACE FASTENING




END VIEW OF ANCHOR CLIP


(AFTER BENDING)



ANCHOR CLIP FOR ½ IN. DIA. BOLT

NOTE: (FLAT PLATE PRIOR TO BENDING) HOLES SHALL BE NO GREATER THAN V_{16} IN. LARGER THAN THE BOLT.

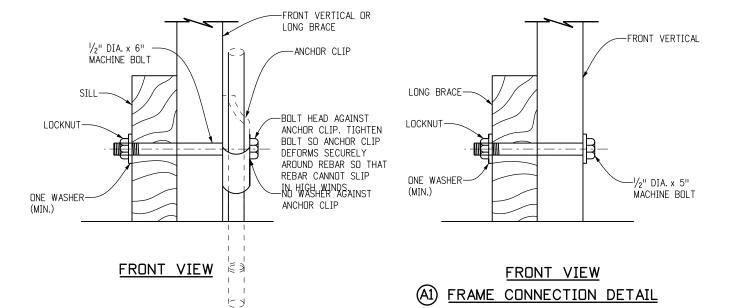

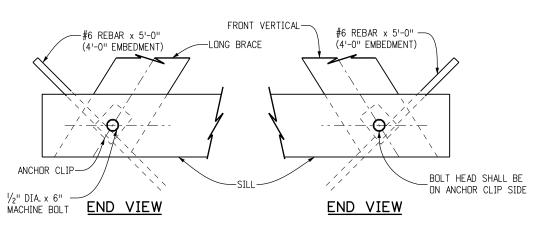

ANCHOR CLIP CONNECTION DETAILS

Computer File Information	Sheet Revisions		
Creation Date: 07/31/19	R-X mm/dd/yy XXXXXXXX XXXX	XX	
Designer Initials: JBK	R-X mm/dd/yy XXXXXXX XXXX	XX	
Last Modification Date: 07/31/19	R-X mm/dd/yy XXXXXXX XXXX	XX	
Detailer Initials: LTA	R-X mm/dd/yy XXXXXXX XXXX	XX	
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English	R-X mm/dd/yy XXXXXXX XXXX	XX	

Colorado Departmer	Colorado Department of Transportation		As Constructed		OOD S	Project No./Code	
Street Address Office location City, CD Zip code Phone: XXX-XXXX Fax: XXX-XXXX		No Revisions:	mm/dd/yy	10 FOOT HIGH		XXXXX/XXXX	
City, CO	Zip code X-XXX-XXXX Fax: XXX-XXX-XXXX	Revised:	mm/dd/yy	Designer:	XXXXXXX		D-607-11
				Detailer:	XXXXXXX		Sheet Number: 2 of 2
Region, Unit	Intials/Intials	Void:	mm/dd/yy	Sheet Subset:	XXXXXXX	Subset Sheets: XXX of XXX	Project Sheet Number: XX