



| Revision Dates |
|----------------|
| 9/24 |
| 3/23 |
| 10/13 |
| 7/10 |
| 3/07 |
| 3/02 |
| 5/01 |
| 5/00 |

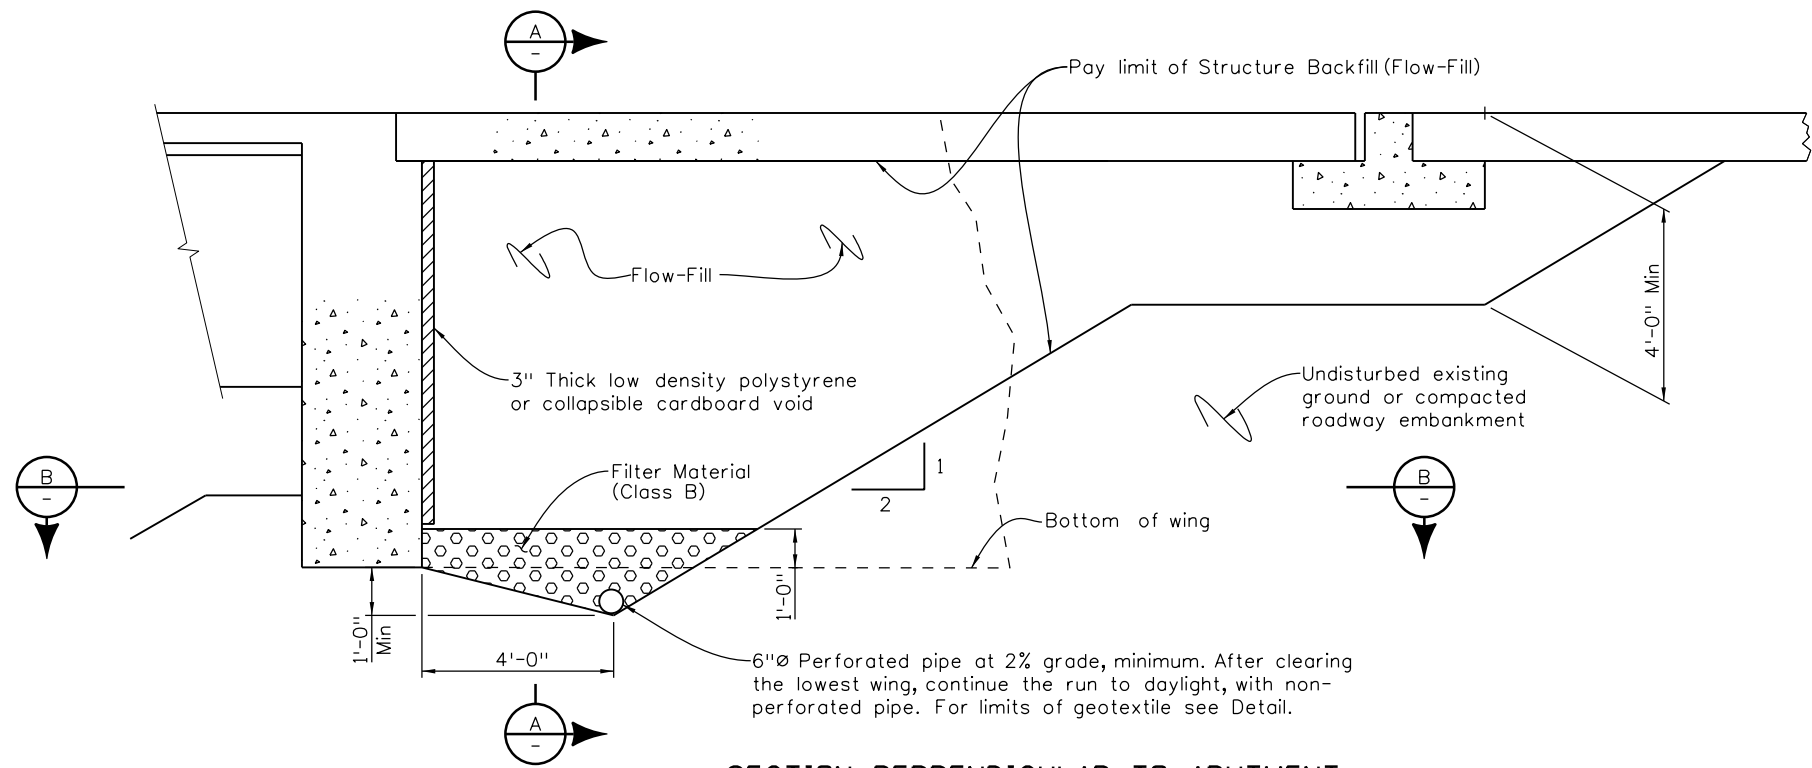


SECTION PERPENDICULAR TO ABUTMENT

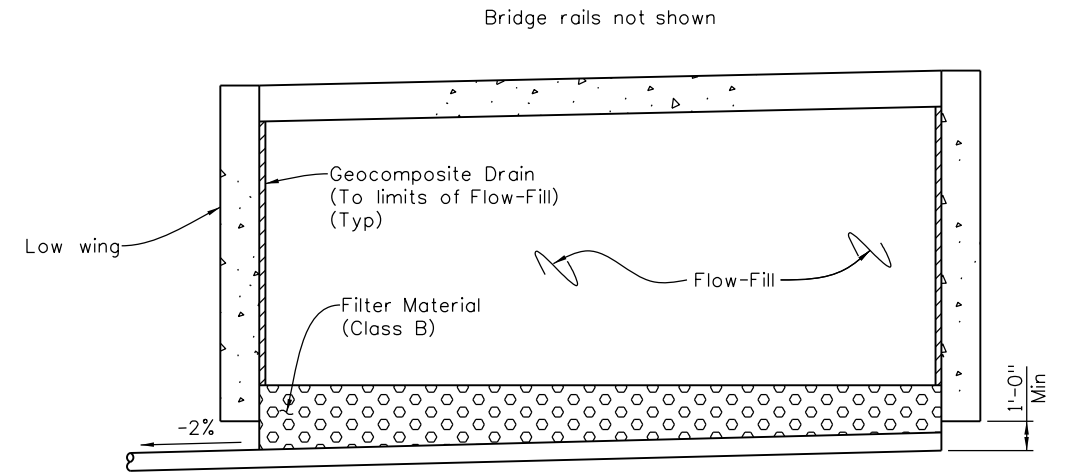


SECTION A-A

Designer/Detailer: Update to show phasing as required.

Designer/Detailer
Discharge into erosion protection (such as riprap or energy dissipators) as needed. Extend and support non-perforated pipe such that a minimum 6" clearance remains below flowline.

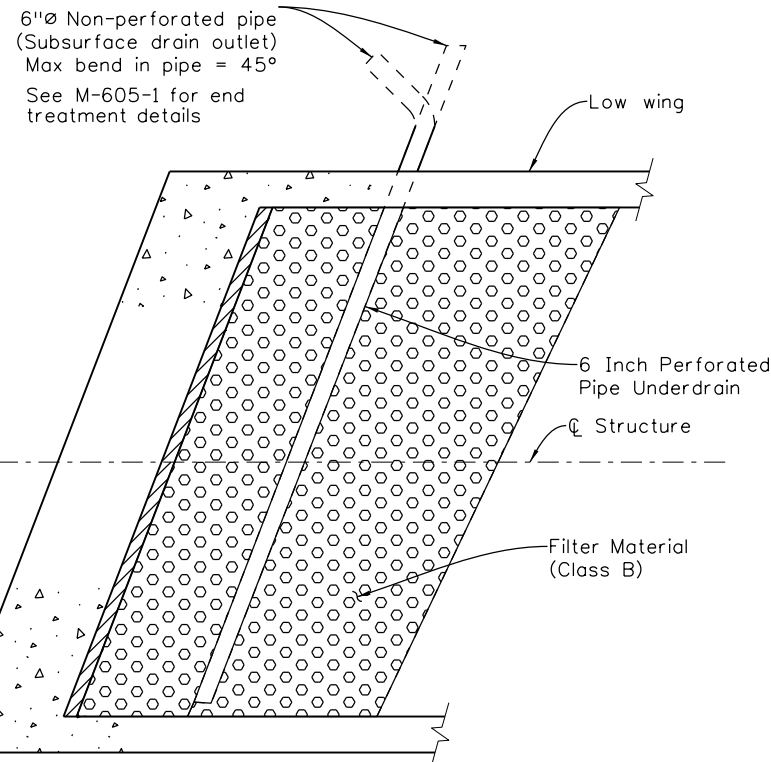

SECTION B-B

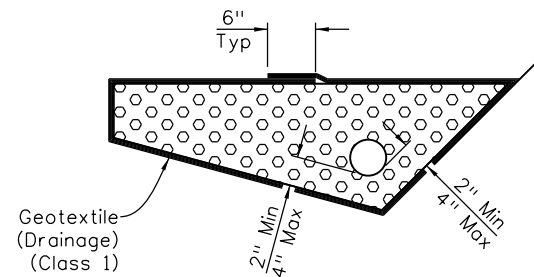

6 INCH PERFORATED PIPE UNDERDRAIN

6 Inch Perforated Pipe Underdrain includes all Filter Material (Class B) and Geotextile (Drainage) (Class 1) surrounding the Filter Material (Class B)

NOTES:

- The maximum lift thickness for Structure Backfill (Flow-Fill) shall be 3 feet. Additional layers shall not be placed until the Structure Backfill (Flow-Fill) has lost sufficient moisture to be walked on without indenting more than 2 inches.
- Payment will be made under Item 206 Structure Backfill (Flow-Fill) and shall include the cost for polystyrene or cardboard void, Geocomposite Drain, 6 Inch Perforated Pipe Underdrain, and Subsurface Drain Outlet (6" non-perforated pipe).
- Installation of Pipe Underdrain, Subsurface Drain Outlet, and Geocomposite Drain will conform to the Construction requirements of Section 605.03, 605.06 and 605.04, respectively.

| INITIALS | DESIGN | DATE | DETAIL | DATE | QUANTITY | DATE |
|------------|--------|------|--------|------|----------|------|
| By | | | | | | |
| Checked By | | | | | | |

\$PLOT_INFO\$

| | | | | | | | | | | | | |
|---|---|-----------------|----------|-------|--|----------------------|--------------------|---------------------------|--------------------------------|----------------|------------------|--|
| All seals for this set of drawings are applied to the cover page(s) | Print Date: \$DATE\$ | Sheet Revisions | | | Colorado Department of Transportation | | As Constructed | | STRUCTURE BACKFILL (FLOW-FILL) | | Project No./Code | |
| | File Name: Sheet_B-206-F1.dgn | Date: | Comments | Init. | 2829 West Howard Place, 3rd Floor Denver, CO 80204 Phone: 303-512-4079 FAX: 303-757-9197 Staff Bridge Branch | No Revisions: | | Project Number | | Project Number | | |
| | Horiz. Scale: As Noted Vert. Scale: As Noted | | | | | Revised: | Designer: XXXXXXXX | Structure Numbers | X-XX-XX | Code | | |
| | Unit Information Unit Leader Initials | | | | | Void: | Detailer: XXXXXXXX | Subset Sheets: BXX of XXX | Sheet Number | | | |
| | | | | | | Sheet Subset: BRIDGE | | | | | | |