


(This sheet must be
accompanied with B-504-H1)

*** For example spacing on B-504-H1: DH=16' requires 13.689 SY/LF reinforcement corresponding to 6.637 CY/LF volume of MRS with Class 1 backfill paid separately.

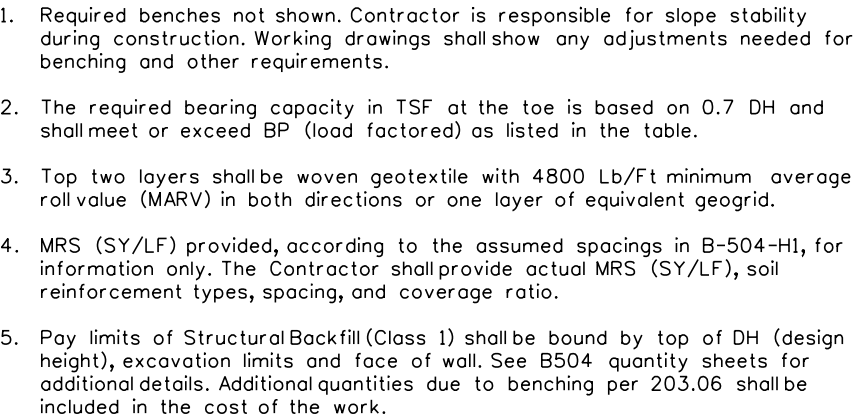

☆ Barrier required when located within clear zone. See M-606-15 Style CD for details.

INITIALS	DESIGN	DATE	DETAIL	DATE	QUANTITY	DATE
By						
Checked By						

\$PLOT_INFO\$