


Designer/Detailer: Show applicable top loading conditions and use appropriate references.

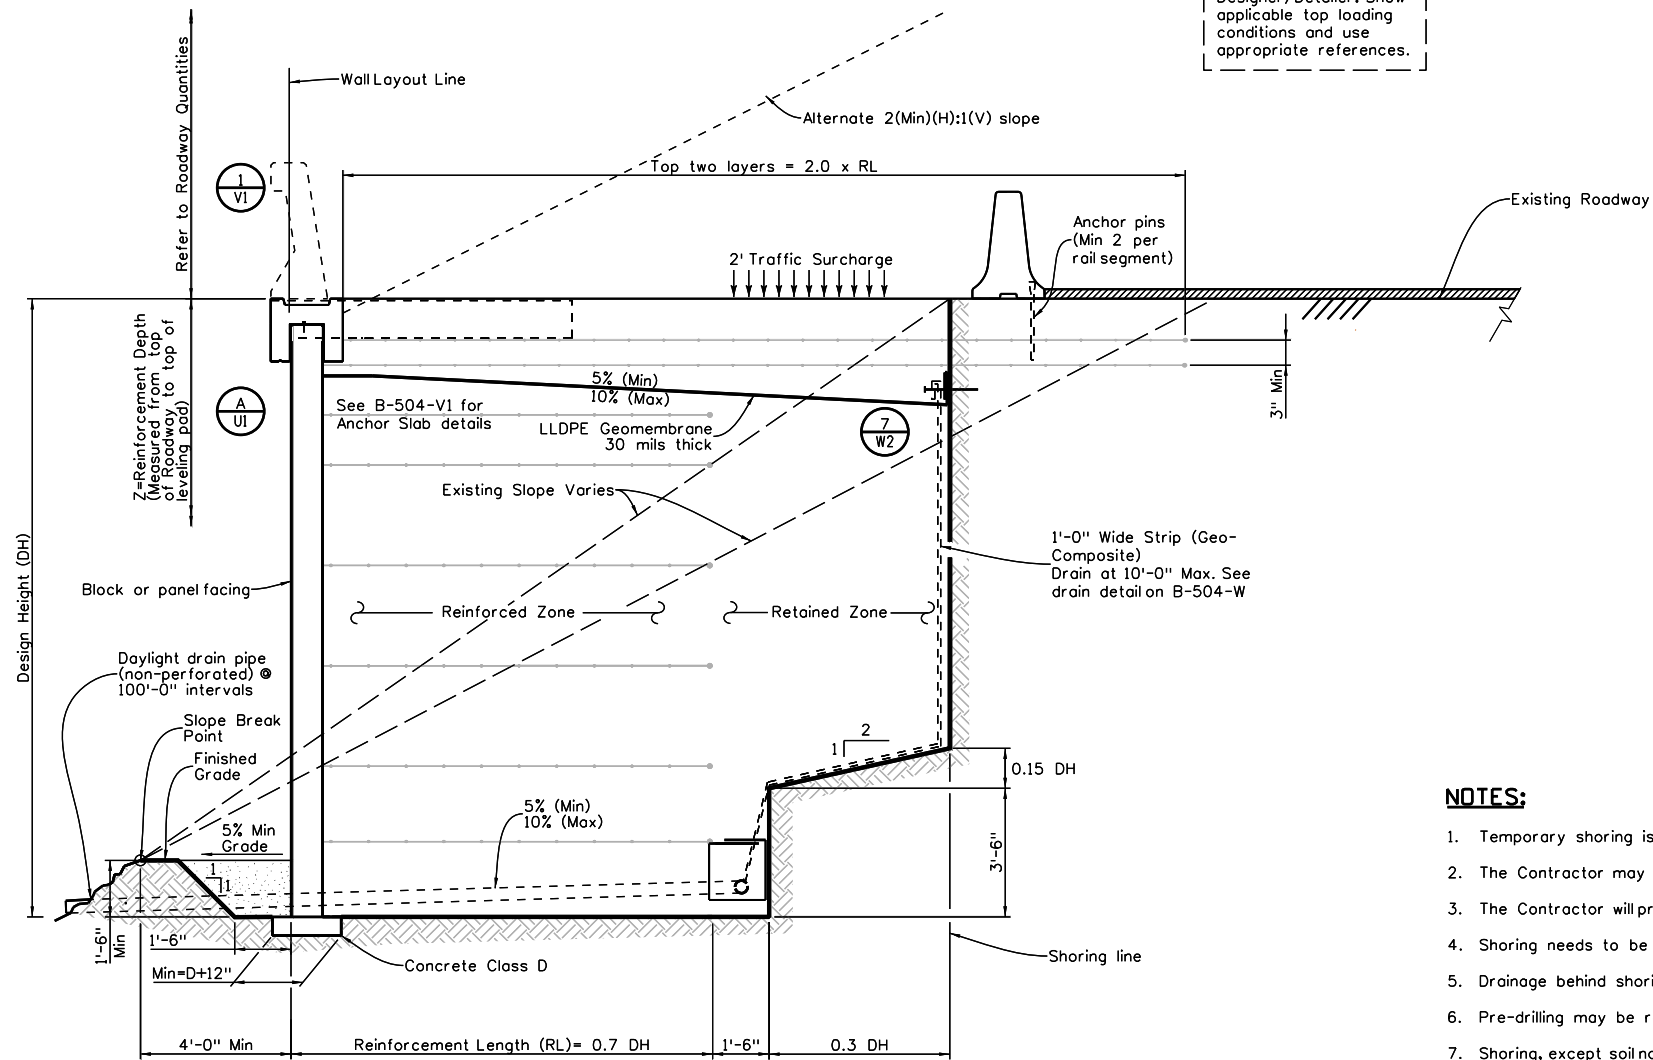

SECTION VIEW

NOTES:

1. Temporary shoring is required.
2. The Contractor may provide alternate shoring pattern.
3. The Contractor will provide working drawings for shoring per table 105-1.
4. Shoring needs to be in place prior to any excavation.
5. Drainage behind shoring shall be designed and provided by the Contractor.
6. Pre-drilling may be required for sheet/soldier piles.
7. Shoring, except soil nail as shoring wall, shall be removed when backfill reaches membrane elevation as approved by the Engineer.
8. Pay limits of Structural Backfill (Class 1) shall be bound by top of DH (design height), Shoring line and face of wall.

Revision Dates
09-16 10-24

INITIALS	DESIGN	DATE	DETAIL	DATE	QUANTITY	DATE
By						
Checked By						

All seals for this set of drawings are applied to the cover page(s)

Print Date: \$DATE\$
File Name: Sheet_B-504-S1.dgn
Horiz. Scale: Vert. Scale: As Noted
Unit Information Unit Leader Initials

Sheet Revisions		
Date:	Comments	Init.

Colorado Department of Transportation

2829 West Howard Place, 3rd Floor
 Denver, CO 80204
 Phone: 303-512-4079
 FAX: 303-757-9197

Staff Bridge Branch

Initials

As Constructed
No Revisions:
Revised:
Void:

MSE/GRS WALL WITH SHORING FOR CONSTRUCTION			
Designer:	XXXXXXX	Structure	XXXXXXXXXXXX
Detailer:	XXXXXXX	Numbers	XXXXXXXXXXXX
Sheet Subset:	WALL	Subset Sheets:	WXX of XXX

Project No./Code
Sheet Number