

Abut

S = 0.2 Span length



(use with B-618-4 and B-618-6: also add B-618-7 when horizontal curve is present.)

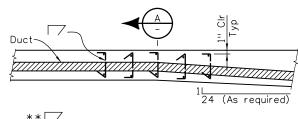

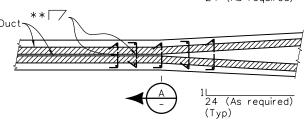

The webs shall be flared near the anchorage as required to maintain a  $1^{\prime\prime}2^{\prime\prime}$  Min cover over the ducts and a 1" Min cover over the stirrups. The flare may be on one side only for exterior girder webs. Provide \*\* ties above, below, and between each row of ducts, tie to five stirrups at begining of web flare.








## NOTES:

1. See Abutment Details and Superstructure Details for dimensions and reinforcing steelnot shown.

## PLAN VIEW OF DUCTS AT GIRDER WEB FLARE

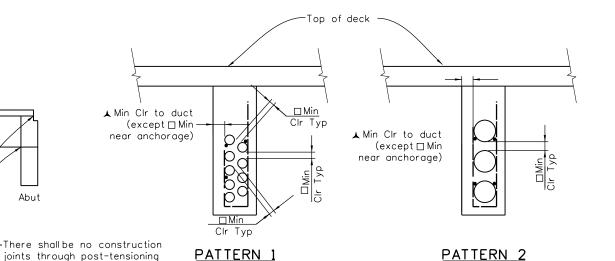

CLEARANCE REQUIREMENTS FOR DUCTS

▲ = 0.75 Duct diameter Min clearance to duct, or 3" Min  $\Box$  = 0.44 Duct diameter Min clearance between ducts, or  $1\frac{1}{2}$ " Min

Initials

Designer/Detailer:					
Jacking force per duct	** No of stirrups per layer & size	Min duct radius *			
0 to 308 Kip	2 - #3	83 Ft			
308 to 527 Kip	4 - #3	142 Ft			
527 to 835 Kip	4 - #4	225 Ft			
835 to 1186 Kip	6 - #4	320 Ft			

\* For curved webs and ducts greater than 4" diameter, use #3 \*\* bars @ 14" Max spacing for the full length of curved webs. For tighter radii than shown, a custom duct spacing greater than the  $\square$  Min shown and more \*\* reinforcing must be designed, see B-618-7. The above requirements only address localized bursting. In addition to the above, lateral bending must be checked when there is any horizontal web curvature.

All seals for this set of drawings are applied to the cover page(s)

Print Date: \$DATE\$		Sheet Revisions		C	
File Name: Sheet_B-618-5.dgn		Date:	Comments	Init.	1
Horiz. Scale: None	Vert. Scale: As Noted				1
Unit Information	Unit Leader Initials				1
					S

0.2 Span length to € Pier ♦

Abut

anchorages. Revise

construction joints at

abutments as necessary.

or as approved by the Engineer

2'-0" ♦

Const Jt

TRANSVERSE GIRDER CONSTRUCTION JOINT

SUPERSTRUCTURE PLACING SCHEDULE

Numbers (1), (2), and (3) indicate sequence of placing slab and girder concrete when each section constitutes a separate pour. They may

♦ Except when staged construction requires alternate joint locations.

be placed continuously or in parts, as indicated above and as

placing schedule to the Engineer for approval.

approved by the Engineer. Contractor may submit an alternate

Reinf Contthrough joint

Key

Colorado Department of Transportation 2829 West Howard Place, 3rd Floor

Denver, CD 80204 Phone: 303-512-4079 FAX: 303-757-9197 Staff Bridge Branch

	As Constructed	CAST-II POST-TE	Project No./Code			
	No Revisions:	T-GIRDER	Project Number			
F	Revised:	Designer: XXXXXXXX		Code		
		Detailer: XXXXXXXX	Numbers X-XX-XX			
	Void:	Sheet Subset: BRIDGE	Subset Sheets: BXX of XXX	Sheet Number		