

54R3-42r_CO;

6.00" Radius, 1.25" Border, 0.75" Indent, White on Green;
"EXPRESS", E 2K; "LANE", E 2K;

6.00" Radius, 1.25" Border, 0.75" Indent, Black on White;
"25 FEET", D 2K;
"MAX LENGTH", C 2K 70% spacing;
"NO TRAILERS", C 70% spacing;

Table of letter and object lefts

E	X	P	R	E	S	S
7.25	12.50	19.00	24.88	30.88	36.25	42.00

L	A	N	E
15.50	20.50	27.63	34.00

2	5	F	E	E	T
9.13	16.13	27.63	32.25	37.00	41.13


M	A	X
6.63	11.25	15.25

L	E	N	G	T	H
24.88	28.50	32.25	36.50	40.38	44.00

—
2.00

N	O
7.00	11.25

T	R	A	I	L	E	R	S
18.75	22.38	26.13	30.63	32.38	36.00	39.75	43.63

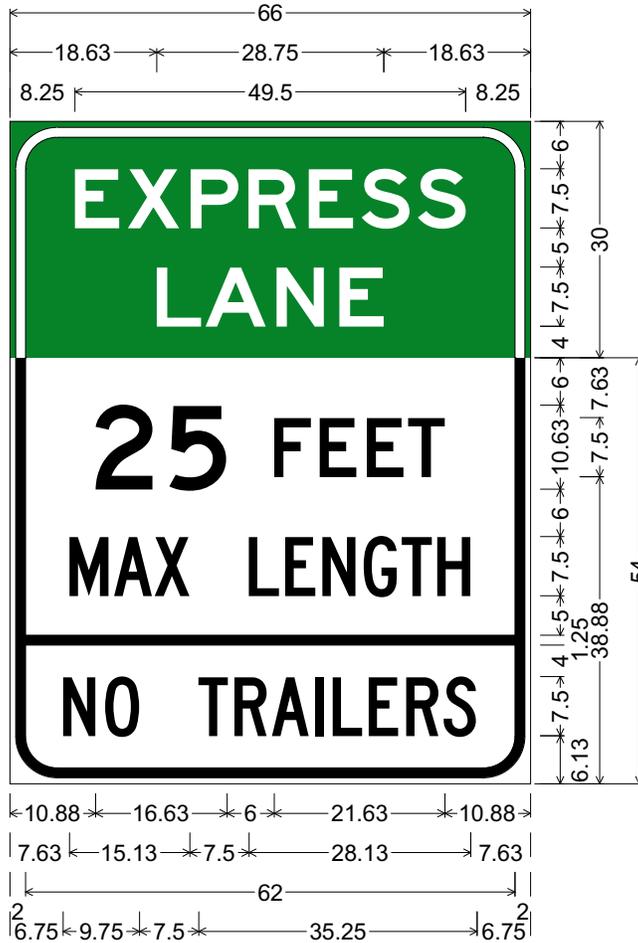

66R3-42r_CO;

6.00" Radius, 1.25" Border, 0.75" Indent, White on Green;

"EXPRESS", E 2K; "LANE", E 2K;

6.00" Radius, 1.25" Border, 0.75" Indent, Black on White;

"25 FEET", D 2K;

"MAX LENGTH", C 2K 70% spacing;

"NO TRAILERS", C 70% spacing;

Table of letter and object lefts

E	X	P	R	E	S	S			
8.25	14.88	23.00	30.25	37.88	44.50	51.63			
L	A	N	E						
18.63	24.88	33.75	41.75						
2	5	F	E	E	T				
10.88	20.25	33.50	39.25	45.25	50.50				
M	A	X							
7.63	13.25	18.38							
		L	E	N	G	T	H		
		30.25	34.88	39.63	44.88	49.63	54.25		
							2.00		
							N	O	
							6.75	12.00	
		T	R	A	I	L	E	R	S
		24.00	28.50	33.13	38.75	40.88	45.50	50.25	55.00