APPENDIX F
STANDARD LANGUAGE

THIS PAGE INTENTIONALLY LEFT BLANK

STANDARD PLATTE RIVER DEPLETION LANGUAGE

This project has elements that will cause a depletion to the South Platte River basin. To address the effects this depletion will have on federally listed species downstream that depend on the river for their survival, CDOT, as a state agency, is participating in the South Platte Water Related Activities Program (SPWRAP). CDOT is cooperating with the Federal Highway Administration (FHWA), which provides a federal nexus for the project. In response to the need for formal consultation for the water used from the South Platte basin, FHWA has prepared a Programmatic Biological Assessment (PBA) dated 02/22/2012 that estimates total water usage until 2019. The PBA addresses the following species: Least Tern (interior population) (*Sternula antillarum),* pallid sturgeon (*Scaphirhynchus albus)*, Piping Plover (*Charadrius melodus)*, western prairie fringed orchid (*Platanthera praeclara)*, and the Whooping Crane (*Grus americana)*. On 04/04/2012, the USFWS signed a Biological Opinion that concurs with this approach and requires a yearly reporting of water usage. The water used for this project will be reported to the USFWS at the year's end after the completion of the project as per the aforementioned consultation. Effects to species not addressed in the PBA or affected by causes other than water depletions to the South Platte will be analyzed separately.

GLOBAL CLIMATE CHANGE CUMULATIVE EFFECTS STANDARD LANGUAGE

Please note that the comment boxes provide direction for analysis but should be removed once the following text is inserted into the NEPA document. A summary of this full text can be included in the NEPA document so long as the full text is included as a technical report.

Climate change is an important national and global concern. While the earth has gone through many natural changes in climate in its history, there is general agreement that the earth's climate is currently changing at an accelerated rate and will continue to do so for the foreseeable future. Anthropogenic (human-caused) greenhouse gas (GHG) emissions contribute to this rapid change. Carbon dioxide (CO_2) makes up the largest component of these GHG emissions. Other prominent transportation GHGs include methane (CH_4) and nitrous oxide (N_2O).

Many GHGs occur naturally. Water vapor is the most abundant GHG and makes up approximately two thirds of the natural greenhouse effect. However, the burning of fossil fuels and other human activities are adding to the concentration of GHGs in the atmosphere. Many GHGs remain in the atmosphere for time periods ranging from decades to centuries. GHGs trap heat in the earth's atmosphere. Because atmospheric concentration of GHGs continues to climb, our planet will continue to experience climate-related phenomena. For example, warmer global temperatures can cause changes in precipitation and sea levels.

To date, no national standards have been established regarding GHGs, nor has the Environmental Protection Agency (EPA) established criteria or thresholds for ambient GHG emissions pursuant to its authority to establish motor vehicle emission standards for CO_2 under the Clean Air Act. However, there is a considerable body of scientific literature addressing the sources of GHG emissions and their adverse effects on climate, including reports from the Intergovernmental Panel on Climate Change, the US National Academy of Sciences, and EPA and other Federal agencies. GHGs are different from other air pollutants evaluated in Federal environmental reviews because their impacts are not localized or regional due to their rapid dispersion into the global atmosphere, which is characteristic

of these gases. The *affected environment* for CO_2 and other GHG emissions is the entire planet. In addition, from a quantitative perspective, global climate change is the cumulative result of numerous and varied emissions sources (in terms of both absolute numbers and types), each of which makes a relatively small addition to global atmospheric GHG concentrations. In contrast to broad scale actions such as actions involving an entire industry sector or very large geographic areas, it is difficult to isolate and understand the GHG emissions impacts for a particular transportation project. Furthermore, presently there is no scientific methodology for attributing specific climatological changes to a particular transportation project's emissions.

Under the National Environmental Policy Act (NEPA), detailed environmental analysis should be focused on issues that are significant and meaningful to decision-making.[1] Federal Highway Administration (FHWA) has concluded, based on the nature of GHG emissions and the exceedingly small potential GHG impacts of the proposed action, as discussed below and shown in Table 1, that the GHG emissions from the proposed action will not result in "reasonably foreseeable significant adverse impacts on the human environment" (40 CFR 1502.22(b)). The GHG emissions from the project build alternatives will be insignificant, and will not play a meaningful role in a determination of the environmentally preferable alternative or the selection of the preferred alternative. More detailed information on GHG emissions "is not essential to a reasoned choice among reasonable alternatives" (40 CFR 1502.22(a)) or to making a decision in the best overall public interest based on a balanced consideration of transportation, economic, social, and environmental needs and impacts (23 CFR 771.105(b)). For these reasons, no alternatives-level GHG analysis has been performed for this project.

The context in which the emissions from the proposed project will occur, together with the expected GHG emissions contribution from the project, illustrate why the project's GHG emissions will not be significant and will not be a substantial factor in the decision-making. The transportation sector is the second largest source of total GHG emissions in the U.S., behind electricity generation. The transportation sector was responsible for approximately 27 percent of all anthropogenic (human caused) GHG emissions in the U.S. in 2010.[2] The majority of transportation GHG emissions are the result of fossil fuel combustion. CO_2 makes up the largest component of these GHG emissions. U.S. CO_2 emissions from the consumption of energy accounted for about 18 percent of worldwide energy consumption CO_2 emissions in 2010.[3]. U.S. transportation CO_2 emissions accounted for about 6 percent of worldwide CO_2 emissions.[4]

While the contribution of GHGs from transportation in the U.S. as a whole is a large component of U.S. GHG emissions, as the scale of analysis is reduced the GHG contributions become quite small. Using CO_2 because of its predominant role in GHG emissions, Table 1 presents the relationship between current and projected Colorado highway CO_2 emissions and total global CO_2 emissions, as well as information on the scale of the project relative to statewide travel activity.

---

[1] *See* 40 CFR 1500.1(b), 1500.2(b), 1500.4(g), and 1501.7

[2] Calculated from data in U.S. Environmental Protection Agency, Inventory of Greenhouse Gas Emissions and Sinks, 1990-2010.

[3] Calculated from data in U.S. Energy Information Administration International Energy Statistics, Total Carbon Dioxide Emissions from the Consumption of Energy, http://www.eia.gov/cfapps/ipdbproject/IEDIndex3.cfm?tid=90&pid=44&aid=8, accessed 2/25/13.

[4] Calculated from data in EIA figure 104: http://www.eia.gov/forecasts/archive/ieo10/emissions.html and EPA table ES-3: http://epa.gov/climatechange/emissions/downloads11/US-GHG-Inventory-2011-Executive-Summary.pdf

Based on emissions estimates from EPA's Motor Vehicle Emissions Simulator (MOVES) model[5], and global CO_2 estimates and projections from the Energy Information Administration, CO_2 emissions from motor vehicles in the entire state of Colorado contributed less than one tenth of one percent of global emissions in 2010 (0.0348 percent). These emissions are projected to contribute an even smaller fraction (0.0261%) in 2040[6]. Vehicle miles traveled (VMT) in the project study area represents __ percent of total Colorado travel activity; and the project itself would increase statewide VMT by __ percent. (Note that the project study area, as defined for the MSAT analysis, includes travel on many other roadways in addition to the proposed project.) As a result, based on the build alternative with the highest VMT[7], FHWA estimates that the proposed project could result in a potential increase in global CO_2 emissions in 2040 of 0._____ percent (less than one thousandth of one percent), and a corresponding increase in Colorado's share of global emissions in 2040 of 0.___ percent. This very small change in global emissions is well within the range of uncertainty associated with future emissions estimates.[8, 9]

[5] http://www.epa.gov/otaq/models/moves/index.htm. EPA's MOVES model can be used to estimate vehicle exhaust emissions of carbon dioxide (CO_2) and other GHGs. CO_2 is frequently used as an indicator of overall transportation GHG emissions because the quantity of these emissions is much larger than that of all other transportation GHGs combined, and because CO_2 accounts for 90 to 95 percent of the overall climate impact from transportation sources. MOVES includes estimates of both emissions rates and VMT, and these were used to estimate the Colorado statewide highway emissions in Table 1.

[6] Colorado emissions represent a smaller share of global emissions in 2040 because global emissions increase at a faster rate.

[7] Selected to represent a "worst case" for purposes of this comparison; the Preferred Alternative may have a smaller contribution.

[8] For example, Figure 114 of the Energy Information Administration's *International Energy Outlook 2010* shows that future emissions projections can vary by almost 20%, depending on which scenario for future economic growth proves to be most accurate.

[9] When an agency is evaluating reasonably foreseeable significant adverse effects on the human environment in an environmental impact statement and there is incomplete or unavailable information, the agency is required make clear that such information is lacking (40 CFR 1502.22). The methodologies for forecasting GHG emissions from transportation projects continue to evolve and the data provided should be considered in light of the constraints affecting the currently available methodologies. As previously stated, tools such as EPA's MOVES model can be used to estimate vehicle exhaust emissions of carbon dioxide (CO_2) and other GHGs. However, only rudimentary information is available regarding the GHG emissions impacts of highway construction and maintenance. Estimation of GHG emissions from vehicle exhaust is subject to the same types of uncertainty affecting other types of air quality analysis, including imprecise information about current and future estimates of vehicle miles traveled, vehicle travel speeds, and the effectiveness of vehicle emissions control technology. Finally, there presently is no scientific methodology that can identify causal connections between individual source emissions and specific climate impacts at a particular location.

Table 1 Statewide and Project Emissions Potential, Relative to Global Totals

	Global CO_2 Emissions, MMT[10]	Colorado Motor Vehicle CO_2 Emissions, MMT[11]	Colorado Motor Vehicle Emissions, % of Global Total	Project Study Area VMT, % of Statewide VMT	Percent Change in Statewide VMT due to Project
Current Conditions (2010)	29,670	10.3	0.0348%		(None)
Future Projection (2040)	45,500	11.9	0.0261%		

Table Notes: MMT = million metric tons. Global emissions estimates are from International Energy Outlook 2010, data for Figure 104, projected to 2040. Nevada emissions and statewide VMT estimates are from MOVES2010b.

These are the projections to 2040.

Hwy_miles	2012_DVMT (Avg Day)	2012_AVMT Annual	2040_DVMT (Avg Day)	2040_AVMT Annual
9,106	76,945,400	28,085,068,000	131,434,700	47,973,670,000

Please explain that this is only for state highways in Colorado

Mitigation for Global GHG Emissions

To help address the global issue of climate change, USDOT is committed to reducing GHG emissions from vehicles traveling on our nation's highways. USDOT and EPA are working together to reduce these emissions by substantially improving vehicle efficiency and shifting toward lower carbon intensive fuels. The agencies have jointly established new, more stringent fuel economy and first ever GHG emissions standards for model year 2012–2025 cars and light trucks, with an ultimate fuel economy standard of 54.5 miles per gallon for cars and light trucks by model year 2025. Further, on September 15, 2011, the agencies jointly published the first ever fuel economy and GHG emissions standards for heavy-duty trucks and buses.[12] Increasing use of technological innovations that can improve fuel economy, such as gasoline- and diesel-electric hybrid vehicles, will improve air quality and reduce CO_2 emissions future years.

Consistent with its view that broad-scale efforts hold the greatest promise for meaningfully addressing the global climate change problem, FHWA is engaged in developing strategies to reduce transportation's contribution to

[10] These estimates are from the EIA's *International Energy Outlook 2010*, and are considered the best-available projections of emissions from fossil fuel combustion. These totals do not include other sources of emissions, such as cement production, deforestation, or natural sources; however, reliable future projections for these emissions sources are not available.

[11] MOVES projections suggest that Colorado motor vehicle CO_2 emissions may increase by 14.9 percent between 2010 and 2040; more stringent fuel economy/GHG emissions standards will not be sufficient to offset projected growth in VMT.

[12] For more information on fuel economy proposals and standards, see the National Highway Traffic Safety Administration's Corporate Average Fuel Economy website: http://www.nhtsa.gov/fuel-economy/.

GHGs—particularly CO_2 emissions—and to assess the risks to transportation systems and services from climate change. In an effort to assist States and MPOs in performing GHG analyses, FHWA has developed a *Handbook for Estimating Transportation GHG Emissions for Integration into the Planning Process.* The Handbook presents methodologies reflecting good practices for the evaluation of GHG emissions at the transportation program level, and will demonstrate how such evaluation may be integrated into the transportation planning process. FHWA has also developed a tool for use at the statewide level to model a large number of GHG reduction scenarios and alternatives for use in transportation planning, climate action plans, scenario planning exercises, and in meeting state GHG reduction targets and goals. To assist states and MPOs in assessing climate change vulnerabilities to their transportation networks, FHWA has developed a draft vulnerability and risk assessment conceptual model and has piloted it in several locations.

At the state level, there are also several programs underway in Colorado to address transportation GHGs. The Governor's Climate Action Plan, adopted in November 2007, includes measures to adopt vehicle CO_2 emissions standards and to reduce vehicle travel through transit, flex time, telecommuting, ridesharing, and broadband communications. CDOT issued a Policy Directive on Air Quality in May 2009. This Policy Directive was developed with input from a number of agencies, including the State of Colorado's Department of Public Health and Environment, EPA, FHWA, the Federal Transit Administration, the Denver Regional Transportation District and the Denver Regional Air Quality Council. This Policy Directive and implementation document, the CDOT Air Quality Action Plan address unregulated MSATs and GHGs produced from Colorado's state highways, interstates, and construction activities.

As a part of CDOT's commitment to addressing MSATs and GHGs, some of CDOT's program wide activities include:

- Researching pavement durability opportunities with the goal of reducing the frequency of resurfacing and/or reconstruction projects.
- Developing air quality educational materials, specific to transportation issues, for citizens, elected officials, and schools, including development of vehicle idling reduction programs for schools and communities.
- Offering outreach to communities to integrate land use and transportation decisions to reduce growth in VMT, such as smart growth techniques, buffer zones, transit-oriented development, walkable communities, access management plans, etc.
- Committing to research additional concrete additives that would reduce the demand forcement.
- Expanding Transportation Demand Management efforts statewide to better utilize the existing transportation mobility network.
- Continuing to diversify the CDOT fleet by retrofitting diesel vehicles, specifying the types of vehicles and equipment contractors may use, purchasing low-emission vehicles, such as hybrids, and purchasing cleaner burning fuels through bidding incentives where feasible.
- Exploring congestion and/or right-lane only restrictions for motor carriers.
- Funding truck parking electrification.
- Researching additional ways to improve freight movement and efficiency statewide.
- Committing to use ultra-low sulfur diesel for non-road equipment statewide.
- Developing a low-VOC emitting tree landscaping specification.

Even though project-level mitigation measures will not have a substantial impact on global GHG emissions because of the exceedingly small amount of GHG emissions involved, the above-identified activities are part of a program-wide effort by FHWA and CDOT to adopt practical means to avoid and minimize environmental impacts in accordance with 40 CFR 1505.2(c).

Summary

This document does not incorporate an analysis of the GHG emissions or climate change effects of each of the alternatives because the potential change in GHG emissions is very small in the context of the affected environment. Because of the insignificance of the GHG impacts, those impacts will not be meaningful to a decision on the environmentally preferable alternative or to a choice among alternatives. As outlined above, FHWA is working to develop strategies to reduce transportation's contribution to GHGs—particularly CO_2 emissions—and to assess the risks to transportation systems and services from climate change. FHWA will continue to pursue these efforts as productive steps to address this important issue. Finally, the construction best practices described above represent practicable project-level measures that, while not substantially reducing global GHG emissions, may help reduce GHG emissions on an incremental basis and could contribute in the long term to meaningful cumulative reduction when considered across the Federal-aid highway program.

RIGHT-OF-WAY AND RELOCATION STANDARD LANGUAGE

Model Relocation Statement

In certain situations, it may also be necessary to acquire improvements that are located within a proposed acquisition parcel. In those instances where the improvements are occupied, it becomes necessary to "relocate" those individuals from the subject property (residential or business) to a replacement site. The Uniform Act provides for numerous benefits to these individuals to assist them both financially and with advisory services related to relocating their residence or business operation. Although the benefits available under the [Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, as amended, (Uniform Act)] are far too numerous and complex to discuss in detail in this document, they are available to both owner occupants and tenants of either residential or business properties. In some situations, only personal property must be moved from the real property and this is also covered under the relocation program. As soon as feasible, any person scheduled to be displaced shall be furnished with a general written description of the displacing agency's relocation program that provides, at a minimum, detailed information related to eligibility requirements, advisory services and assistance, payments, and the appeal process. It shall also provide notification that the displace person(s) will not be required to move without at least 90 days advance written notice. For residential relocatees, this notice cannot be provided until a written offer to acquire the subject property has been presented, and at least one comparable replacement dwelling has been made available. Relocation benefits will be provided to all eligible persons regardless of race, color, religion, sex, or national origin. Benefits under the [Uniform] Act, to which each eligible owner or tenant may be entitled, will be determined on an individual basis and explained to them in detail by an assigned right-of-way Specialist.

Model Acquisition Statement

For any person(s) whose real property interests may be impacted by this project, the acquisition of those property interests will comply fully with the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, as amended (Uniform Act). The Uniform Act is a federally mandated program that applies to all acquisitions of real property or displacements of persons resulting from federal or federally assisted programs or projects. It was created to provide for and ensure the fair and equitable treatment of all such persons. To further ensure that the provisions contained within this act are applied "uniformly," CDOT requires Uniform Act compliance on any project for which it has oversight responsibility regardless of the funding source. Additionally, the Fifth Amendment of the U.S. Constitution provides that private property may not be taken for a public use without payment of "just compensation." All impacted owners will be provided notification of the acquiring agency's intent to acquire an interest in their property including a written offer letter of just compensation specifically describing those property interests. A right-of-way specialist will be assigned to each property owner to assist them with this process.

STATUE OF LIMITATIONS STANDARD LANGUAGE

The Federal Highway Administration may publish a notice in the Federal Register, pursuant to 23 United States Code (USC) § 139(l), once the Record of Decision (or Finding of No Significant Impact) is approved. If such notice is published, a claim arising under Federal law seeking judicial review of a permit, license, or approval issued by a Federal agency for a highway or public transportation capital project shall be barred unless it is filed within 150 days after publication of a notice in the Federal Register announcing that the permit, license, or approval is final pursuant to the law under which judicial review is allowed. If no notice is published, then the periods of time that otherwise are provided by the Federal laws governing such claims will apply.

FHWA STANDARD MOBILE SOURCE AIR TOXICS (MSAT) LANGUAGE

U.S. Department of Transportation
Federal Highway Administration

Memorandum

SENT VIA ELECTRONIC MAIL

Subject: **INFORMATION:** Interim Guidance Update on Mobile Source Air Toxic Analysis in NEPA Documents

Date: December 6, 2012

/S/Original signed by

From: April Marchese
Director, Office of Natural Environment

In Reply Refer To:
HEPN-10

To: Division Administrators
Federal Lands Highway Division Engineers

PURPOSE

The purpose of this memorandum is to update the September 2009 interim guidance that advised Federal Highway (FHWA) Division offices on when and how to analyze Mobile Source Air Toxics (MSAT) under the National Environmental Policy Act (NEPA) review process for highway projects.

This update reflects recent changes in methodology for conducting emissions analysis and updates of research in the MSAT arena. The U.S. Environmental Protection Agency (EPA) released the latest emission model, the Motor Vehicle Emissions Simulator (MOVES) in 2010, and started a 2-year grace period to phase in the requirement of using MOVES for transportation conformity analysis. On February 8, 2011, EPA issued guidance on Using the MOVES and Emission FACtors (EMFAC) Models in NEPA Evaluation that recommended the same grace period be applied to project-level emissions analysis for NEPA purposes. At the end of this grace period, i.e. beginning December 20, 2012, project sponsors should use MOVES to conduct emissions analysis for NEPA purposes. To prepare for this transition, FHWA is updating the September 2009 Interim Guidance to incorporate the analysis conducted using MOVES. Based on FHWA's analysis using MOVES2010b, the latest version of MOVES, diesel particulate matter (diesel PM) has become the dominant MSAT of concern. We have also provided an update on the status of scientific research on air toxics. The update supersedes the September 2009 Interim Guidance and should be referenced as a whole in NEPA documentation.

BACKGROUND

Controlling air toxic emissions became a national priority with the passage of the Clean Air Act Amendments (CAAA) of 1990, whereby Congress mandated that the U.S. Environmental Protection Agency (EPA) regulate 188 air toxics, also known as hazardous air pollutants. The EPA has assessed this expansive list in their latest rule on the Control of Hazardous Air

Pollutants from Mobile Sources (Federal Register, Vol. 72, No. 37, page 8430, February 26, 2007), and identified a group of 93 compounds emitted from mobile sources that are listed in their Integrated Risk Information System (IRIS) (http://cfcpub.epa.gov/ncea/iris/index.cfm). In addition, EPA identified seven compounds with significant contributions from mobile sources that are among the national and regional-scale cancer risk drivers from their 1999 National Air Toxics Assessment (NATA) (http://www.epa.gov/ttn/atw/nata1999/). These are *acrolein, benzene, 1,3-butidiene, diesel particulate matter plus diesel exhaust organic gases (diesel PM), formaldehyde, naphthalene, and polycyclic organic matter*. While FHWA considers these the priority mobile source air toxics, the list is subject to change and may be adjusted in consideration of future EPA rules.

Motor Vehicle Emissions Simulator (MOVES)

According to EPA, MOVES improves upon the previous MOBILE model in several key aspects: MOVES is based on a vast amount of in-use vehicle data collected and analyzed since the latest release of MOBILE, including millions of emissions measurements from light-duty vehicles. Analysis of this data enhanced EPA's understanding of how mobile sources contribute to emissions inventories and the relative effectiveness of various control strategies. In addition, MOVES accounts for the significant effects that vehicle speed and temperature have on PM emissions estimates, whereas MOBILE did not. MOVES2010b includes all air toxic pollutants in NATA that are emitted by mobile sources. EPA has incorporated more recent data into MOVES2010b to update and enhance the quality of MSAT emission estimates. These data reflect advanced emission control technology and modern fuels, plus additional data for older technology vehicles.

Based on an FHWA analysis using EPA's MOVES2010b model, as shown in Figure 1, even if vehicle-miles travelled (VMT) increases by 102 percent as assumed from 2010 to 2050, a combined reduction of 83 percent in the total annual emissions for the priority MSAT is projected for the same time period.

Figure 1:
PROJECTED NATIONAL MSAT EMISSION TRENDS 2010 – 2050
FOR VEHICLES OPERATING ON ROADWAYS
USING EPA's MOVES2010b MODEL

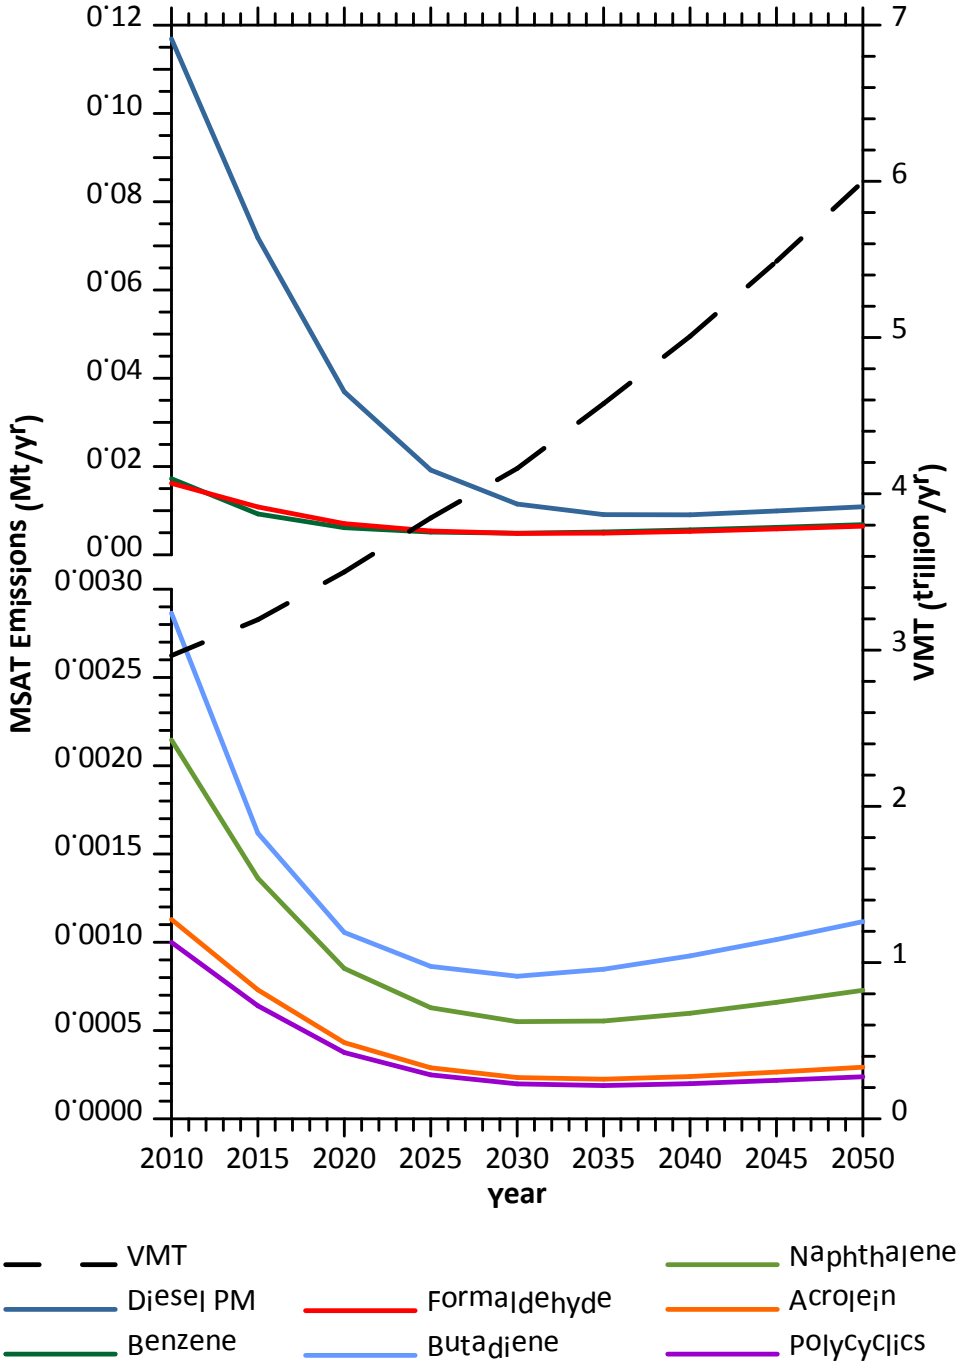

Note: Trends for specific locations may be different, depending on locally derived information representing vehicle-miles travelled, vehicle speeds, vehicle mix, fuels, emission control programs, meteorology, and other factors

Source: EPA MOVES2010b model runs conducted during May – June 2012 by FHWA.

The implications of MOVES on MSAT emissions estimates compared to MOBILE are: lower estimates of total MSAT emissions; significantly lower benzene emissions; significantly higher diesel PM emissions, especially for lower speeds. Consequently, diesel PM is projected to be the dominant component of the emissions total.

MSAT Research

Air toxics analysis is a continuing area of research. While much work has been done to assess the overall health risk of air toxics, many questions remain unanswered. In particular, the tools and techniques for assessing project-specific health outcomes as a result of lifetime MSAT exposure remain limited. These limitations impede the ability to evaluate how potential public health risks posed by MSAT exposure should be factored into project-level decision-making within the context of NEPA.

Nonetheless, air toxics concerns continue to be raised on highway projects during the NEPA process. Even as the science emerges, we are duly expected by the public and other agencies to address MSAT impacts in our environmental documents. The FHWA, EPA, the Health Effects Institute, and others have funded and conducted research studies to try to more clearly define potential risks from MSAT emissions associated with highway projects. The FHWA will continue to monitor the developing research in this field.

NEPA CONTEXT

The NEPA requires, to the fullest extent possible, that the policies, regulations, and laws of the Federal Government be interpreted and administered in accordance with its environmental protection goals. The NEPA also requires Federal agencies to use an interdisciplinary approach in planning and decision-making for any action that adversely impacts the environment. The NEPA requires and FHWA is committed to the examination and avoidance of potential impacts to the natural and human environment when considering approval of proposed transportation projects. In addition to evaluating the potential environmental effects, we must also take into account the need for safe and efficient transportation in reaching a decision that is in the best overall public interest. The FHWA policies and procedures for implementing NEPA are contained in regulation at 23 CFR Part 771.

CONSIDERATION OF MSAT IN NEPA DOCUMENTS

The FHWA developed a tiered approach with three categories for analyzing MSAT in NEPA documents, depending on specific project circumstances:

(1) No analysis for projects with no potential for meaningful MSAT effects;

(2) Qualitative analysis for projects with low potential MSAT effects; or

(3) Quantitative analysis to differentiate alternatives for projects with higher potential MSAT effects.

For projects warranting MSAT analysis, the seven priority MSAT should be analyzed.

(1) Projects with No Meaningful Potential MSAT Effects, or Exempt Projects.

The types of projects included in this category are:

- Projects qualifying as a categorical exclusion under 23 CFR 771.117(c) (subject to consideration whether unusual circumstances exist under 23 CFR 771.117(b));
- Projects exempt under the Clean Air Act conformity rule under 40 CFR 93.126; or
- Other projects with no meaningful impacts on traffic volumes or vehicle mix.

For projects that are categorically excluded under 23 CFR 771.117(c), or are exempt from conformity requirements under the Clean Air Act pursuant to 40 CFR 93.126, no analysis or discussion of MSAT is necessary. Documentation sufficient to demonstrate that the project qualifies as a categorical exclusion and/or exempt project will suffice. For other projects with no or negligible traffic impacts, regardless of the class of NEPA environmental document, no MSAT analysis is recommended.[1] However, the project record should document the basis for the determination of "no meaningful potential impacts" with a brief description of the factors considered. Example language, which must be modified to correspond with local and project-specific circumstances, is provided in Appendix A.

(2) Projects with Low Potential MSAT Effects

The types of projects included in this category are those that serve to improve operations of highway, transit, or freight without adding substantial new capacity or without creating a facility that is likely to meaningfully increase MSAT emissions. This category covers a broad range of projects.

We anticipate that most highway projects that need an MSAT assessment will fall into this category. Any projects not meeting the criteria in category (1) or category (3) below should be included in this category. Examples of these types of projects are minor widening projects; new interchanges, replacing a signalized intersection on a surface street; or projects where design year traffic is projected to be less than 140,000 to 150,000 annual average daily traffic (AADT).

For these projects, a qualitative assessment of emissions projections should be conducted. This qualitative assessment would compare, in narrative form, the expected effect of the project on traffic volumes, vehicle mix, or routing of traffic and the associated changes in MSAT for the project alternatives, including no-build, based on VMT, vehicle mix, and speed. It would also

[1] The types of projects categorically excluded under 23 CFR 771.117(d) or exempt from certain conformity requirements under 40 CFR 93.127 does not warrant an automatic exemption from an MSAT analysis, but they usually will have no meaningful impact.

discuss national trend data projecting substantial overall reductions in emissions due to stricter engine and fuel regulations issued by EPA. Because the emission effects of these projects typically are low, we expect there would be no appreciable difference in overall MSAT emissions among the various alternatives.

Appendix B includes example language for a qualitative assessment, with specific examples for four types of projects: (1) a minor widening project; (2) a new interchange connecting an existing roadway with a new roadway; (3) a new interchange connecting new roadways; and (4) minor improvements or expansions to intermodal centers or other projects that affect truck traffic. The information provided in Appendix B must be modified to reflect the local and project-specific situation.

In addition to the qualitative assessment, a NEPA document for this category of projects must include a discussion of information that is incomplete or unavailable for a project specific assessment of MSAT impacts, in compliance with the Council on Environmental Quality (CEQ) regulations (40 CFR 1502.22(b)). This discussion should explain how current scientific techniques, tools, and data are not sufficient to accurately estimate human health impacts that could result from a transportation project in a way that would be useful to decision-makers. Also in compliance with 40 CFR 150.22(b), it should contain information regarding the health impacts of MSAT. See Appendix C.

(3) Projects with Higher Potential MSAT Effects

This category includes projects that have the potential for meaningful differences in MSAT emissions among project alternatives. We expect a limited number of projects to meet this two-pronged test. To fall into this category, a project should:

- Create or significantly alter a major intermodal freight facility that has the potential to concentrate high levels of diesel particulate matter in a single location, involving a significant number of diesel vehicles for new projects or accommodating with a significant increase in the number of diesel vehicles for expansion projects; or

- Create new capacity or add significant capacity to urban highways such as interstates, urban arterials, or urban collector-distributor routes with traffic volumes where the AADT is projected to be in the range of 140,000 to 150,000[2] or greater by the design year;

And also

- Proposed to be located in proximity to populated areas.

Projects falling within this category should be more rigorously assessed for impacts. If a project falls within this category, you should contact the Office of Natural Environment (HEPN) and the

[2] Using EPA's MOVES2010b emissions model, FHWA staff determined that this range of AADT would result in emissions significantly lower than the Clean Air Act definition of a major hazardous air pollutant (HAP) source, i.e., 25 tons/yr. for all HAPs or 10 tons/yr. for any single HAP. Variations in conditions such as congestion or vehicle mix could warrant a different range for AADT; if this range does not seem appropriate for your project, please consult with the contacts from HEPN and HEPE identified in this memorandum.

Office of Project Development and Environmental Review (HEPE) in FHWA Headquarters for assistance in developing a specific approach for assessing impacts. This approach would include a quantitative analysis to forecast local-specific emission trends of the priority MSAT for each alternative, to use as a basis of comparison. This analysis also may address the potential for cumulative impacts, where appropriate, based on local conditions. How and when cumulative impacts should be considered would be addressed as part of the assistance outlined above. The NEPA document for this project should also include relevant language on unavailable information described in Appendix C.

If the analysis for a project in this category indicates meaningful differences in levels of MSAT emissions among alternatives, mitigation options should be identified and considered. See Appendix E for information on mitigation strategies.

You should also consult with HEPN and HEPE if you have a project that does not fall within any of the types of projects listed above, but you think has the potential to substantially increase future MSAT emissions.

CONCLUSION

What we know about mobile source air toxics is still evolving. As the science progresses FHWA will continue to revise and update this guidance. FHWA is working with Stakeholders, EPA and others to better understand the strengths and weaknesses of developing analysis tools and the applicability on the project level decision documentation process. FHWA wanted to make project sponsors aware of the implications of the transition to the MOVES model and that we will be issuing updates to this interim guidance when necessary. Additional background information on MSAT-related research is provided in Appendix D.

The FHWA Headquarters and Resource Center staff Victoria Martinez (787) 766-5600 X231, Bruce Bender (202) 366-2851, and Michael Claggett (505) 820-2047, are available to provide information and technical assistance, support any necessary analysis, and limit project delays. All MSAT analysis beginning on or after December 20, 2012, should use the MOVES model. Any MSAT analysis initiated prior to that date may continue to operate under the previous guidance and utilize MOBILE6.2. We are available to answer questions from project sponsors as we transition to MOVES.

APPENDICES

Appendix A – Prototype Language for Exempt Projects
Appendix B – Prototype Language for Qualitative Project Level MSAT Analysis
Appendix C – The Council on Environmental Quality (CEQ) Provisions Covering Incomplete or Unavailable Information (40 CFR 1502.22) including a discussion of unavailable information for project-specific MSAT Health Impacts Analysis
Appendix D – FHWA Sponsored Mobile Source Air Toxics Research Efforts
Appendix E – MSAT Mitigation Strategies

APPENDIX A – Prototype Language for Exempt Projects

The purpose of this project is to (*insert major deficiency that the project is meant to address*) by constructing (*insert major elements of the project*). This project has been determined to generate minimal air quality impacts for CAAA criteria pollutants and has not been linked with any special MSAT concerns. As such, this project will not result in changes in traffic volumes, vehicle mix, basic project location, or any other factor that would cause an increase in MSAT impacts of the project from that of the no-build alternative.

Moreover, EPA regulations for vehicle engines and fuels will cause overall MSAT emissions to decline significantly over the next several decades. Based on regulations now in effect, an analysis of national trends with EPA's MOVES model forecasts a combined reduction of over 80 percent in the total annual emission rate for the priority MSAT from 2010 to 2050 while vehicle-miles of travel are projected to increase by over 100 percent. This will both reduce the background level of MSAT as well as the possibility of even minor MSAT emissions from this project.

APPENDIX B – Examples of Prototype Language for Qualitative Project-Level MSAT Analysis

The information in this Appendix is for projects with low potential MSAT effects – any non-exempt project that does not meet the threshold criteria for higher potential effects, as described in the interim guidance, should be considered for treatment provided here. The types of projects that fall into this category are those that improve operations of highways, or freight facilities without adding substantial new capacity. Examples include minor widening projects or new interchanges replacing signalized intersection on surface streets.

The following are some examples of qualitative MSAT analyses for different types of projects. Each project is different, and some projects may contain elements covered in more than one of the examples below. Analysts can use the example language as a starting point, but should tailor it to reflect the unique circumstances of the project being considered. The following factors should be considered when crafting a qualitative analysis:

- For projects on an existing alignment, MSAT are expected to decline due to the effect of new EPA engine and fuel standards.

- Projects that result in increased travel speeds will reduce MSAT emissions per VMT basis, although previously, the effect of speed changes on diesel particulate matter was not accounted for in the MOBILE6.2 model, however, MOVES does provide this estimation and should be accounted for accordingly. This speed benefit may be offset somewhat by increased VMT if the more efficient facility attracts additional vehicle trips.

- Projects that facilitate new development may generate additional MSAT emissions from new trips, truck deliveries, and parked vehicles (due to evaporative emissions). However, these may also be activities that are attracted from elsewhere in the metro region; thus, on a regional scale there may be no net change in emissions.

- Projects that create new travel lanes, relocate lanes, or relocate economic activity closer to homes, schools, businesses, and other populated areas may increase concentrations of MSAT at those locations relative to No Action.

Other elements related to a qualitative analysis are a discussion of information that is incomplete or unavailable for a project specific assessment of MSAT impacts and a discussion of any MSAT mitigation measures that may be associated with the project.

INTODUCTORY LANGUAGE FOR QUALITATIVE ANALYSIS FOR ALL PROJECTS

A qualitative analysis provides a basis for identifying and comparing the potential differences among MSAT emissions, if any, from the various alternatives. The qualitative assessment presented below is derived in part from a study conducted by the FHWA entitled *A Methodology for Evaluating Mobile Source Air Toxic Emissions Among Transportation Project Alternatives*, found at: www.fhwa.dot.gov/environment/airtoxic/msatcompare/msatemissions.htm

(1) Minor Widening Project

(For purposes of this scenario, minor highway widening projects are those in which the design year traffic is predicted to be less than 125,000 AADT. Widening projects that surpass these criteria are subject to a quantitative analysis.)

For each alternative in this EIS/EA (*specify*), the amount of MSAT emitted would be proportional to the vehicle miles traveled, or VMT, assuming that other variables such as fleet mix are the same for each alternative. The VMT estimated for each of the Build Alternatives is slightly higher than that for the No Build Alternative, because the additional capacity increases the efficiency of the roadway and attracts rerouted trips from elsewhere in the transportation network. Refer to Table ___ (*specify*). This increase in VMT would lead to higher MSAT emissions for the preferred action alternative along the highway corridor, along with a corresponding decrease in MSAT emissions along the parallel routes. The emissions increase is offset somewhat by lower MSAT emission rates due to increased speeds; according to EPA's MOVES2010b model, emissions of all of the priority MSAT decrease as speed increases. Because the estimated VMT under each of the Alternatives are nearly the same, varying by less than ___ (*specify*) percent, it is expected there would be no appreciable difference in overall MSAT emissions among the various alternatives. Also, regardless of the alternative chosen, emissions will likely be lower than present levels in the design year as a result of EPA's national control programs that are projected to reduce annual MSAT emissions by over 80 percent between 2010 and 2050. Local conditions may differ from these national projections in terms of fleet mix and turnover, VMT growth rates, and local control measures. However, the magnitude of the EPA-projected reductions is so great (even after accounting for VMT growth) that MSAT emissions in the study area are likely to be lower in the future in nearly all cases.

(The following paragraph may apply if the project includes plans to construct travel lanes closer to populated areas.)

The additional travel lanes contemplated as part of the project alternatives will have the effect of moving some traffic closer to nearby homes, schools, and businesses; therefore, under each alternative there may be localized areas where ambient concentrations of MSAT could be higher under certain Build Alternatives than the No Build Alternative. The localized increases in MSAT concentrations would likely be most pronounced along

the expanded roadway sections that would be built at _____ (*specify location*), under Alternatives _____ (*specify*), and along _____ (*specify route*) under Alternatives _____ (*specify*). However, the magnitude and the duration of these potential increases compared to the No-Build alternative cannot be reliably quantified due to incomplete or unavailable information in forecasting project-specific MSAT health impacts. In sum, when a highway is widened, the localized level of MSAT emissions for the Build Alternative could be higher relative to the No Build Alternative, but this could be offset due to increases in speeds and reductions in congestion (which are associated with lower MSAT emissions). Also, MSAT will be lower in other locations when traffic shifts away from them. However, on a regional basis, EPA's vehicle and fuel regulations, coupled with fleet turnover, will over time cause substantial reductions that, in almost all cases, will cause region-wide MSAT levels to be significantly lower than today.

(2) New Interchange Connecting an Existing Roadway with a New Roadway

(This scenario is oriented toward projects where a new roadway segment connects to an existing limited access highway. The purpose of the roadway is primarily to meet regional travel needs, e.g., by providing a more direct route between locations.)

For each alternative in this EIS/EA (*specify*), the amount of MSAT emitted would be proportional to the vehicle miles traveled, or VMT, assuming that other variables such as fleet mix are the same for each alternative. Because the VMT estimated for the No Build Alternative is higher than for any of the Build Alternatives, higher levels of MSAT are not expected from any of the Build Alternatives compared to the No Build. Refer to Table ___ (*specify*). In addition, because the estimated VMT under each of the Build Alternatives are nearly the same, varying by less than ___ (*specify*) percent, it is expected there would be no appreciable difference in overall MSAT emissions among the various alternatives. Also, regardless of the alternative chosen, emissions will likely be lower than present levels in the design year as a result of EPA's national control programs that are projected to reduce annual MSAT emissions by over 80 percent from 2010 to 2050. Local conditions may differ from these national projections in terms of fleet mix and turnover, VMT growth rates, and local control measures. However, the magnitude of the EPA-projected reductions is so great (even after accounting for VMT growth) that MSAT emissions in the study area are likely to be lower in the future in virtually all locations.

Under each alternative there may be localized areas where VMT would increase, and other areas where VMT would decrease. Therefore, it is possible that localized increases and decreases in MSAT emissions may occur. The localized increases in MSAT emissions would likely be most pronounced along the new roadway sections that would be built at _____ (*specify location*), under Alternatives _____ (*specify*), and along _____ (*specify route*) under Alternatives _____ (*specify*). However, even if these increases do occur, they too will be substantially reduced in the future due to implementation of EPA's vehicle and fuel regulations.

In sum, under all Build Alternatives in the design year it is expected there would be reduced MSAT emissions in the immediate area of the project, relative to the No Build

Alternative, due to the reduced VMT associated with more direct routing, and due to EPA's MSAT reduction programs.

(3) New Interchange Connecting New Roadways

(This scenario is oriented toward interchange projects developed in response to or in anticipation of economic development, e.g., a new interchange to serve a new shopping/residential development. Projects from the previous example may also have economic development associated with them, so some of this language may also apply.)

For each alternative in this EIS/EA (*specify*), the amount of MSAT emitted would be proportional to the vehicle miles traveled, or VMT, assuming that other variables such as fleet mix are the same for each alternative. The VMT estimated for each of the Build Alternatives is slightly higher than that for the No Build Alternative, because the interchange facilitates new development that attracts trips that would not otherwise occur in the area. Refer to Table ___ (*specify*). This increase in VMT means MSAT under the Build Alternatives would probably be higher than the No Build Alternative in the study area. There could also be localized differences in MSAT from indirect effects of the project such as associated access traffic, emissions of evaporative MSAT (e.g., benzene) from parked cars, and emissions of diesel particulate matter from delivery trucks (*modify depending on the type and extent of the associated development*). Travel to other destinations would be reduced with subsequent decreases in emissions at those locations.

Because the estimated VMT under each of the Build Alternatives are nearly the same, varying by less than ___ (*specify*) percent, it is expected there would be no appreciable difference in overall MSAT emissions among the various Build Alternatives. For all Alternatives, emissions are virtually certain to be lower than present levels in the design year as a result of EPA's national control programs that are projected to reduce annual MSAT emissions by over 80 percent from 2010 to 2050. Local conditions may differ from these national projections in terms of fleet mix and turnover, VMT growth rates, and local control measures. However, the magnitude of the EPA-projected reductions is so great (even after accounting for VMT growth) that MSAT emissions in the study area are likely to be lower in the future than they are today.

(The following discussion would apply to new interchanges in areas already developed to some degree. For new construction in anticipation of economic development in rural or largely undeveloped areas, this discussion would be applicable only to populated areas, such as residences, schools, and businesses.)

The travel lanes contemplated as part of the project alternatives will have the effect of moving some traffic closer to nearby homes, schools and businesses; therefore, under each alternative there may be localized areas where ambient concentrations of MSAT would be higher under certain Alternatives than others. The localized differences in MSAT concentrations would likely be most pronounced along the new/expanded roadway sections that would be built at _____ (*specify location*), under Alternatives _____ (*specify*), and along _____ (*specify route*) under Alternatives _____ (*specify*).

However, the magnitude and the duration of these potential increases cannot be reliably quantified due to incomplete or unavailable information in forecasting project-specific MSAT health impacts. Further, under all Alternatives, overall future MSAT are expected to be substantially lower than today due to implementation of EPA's vehicle and fuel regulations.

In sum, under all Build Alternatives in the design year it is expected there would be slightly higher MSAT emissions in the study area relative to the No Build Alternative due to increased VMT. There also could be increases in MSAT levels in a few localized areas where VMT increases. However, EPA's vehicle and fuel regulations will bring about significantly lower MSAT levels for the area in the future than today.

(4) Minor Improvements or Expansions to Intermodal Centers or Other Projects that Affect Truck Traffic

(The description for these types of projects depends on the nature of the project. The key factor from an MSAT standpoint is the change in truck and rail activity and the resulting change in MSAT emissions patterns.)

For each alternative in this EIS/EA (*specify*), the amount of MSAT emitted would be proportional to the amount of truck vehicle miles traveled (VMT) and rail activity, assuming that other variables (such as travel not associated with the intermodal center) are the same for each alternative. The truck VMT and rail activity estimated for each of the Build Alternatives are higher than that for the No Build Alternative, because of the additional activity associated with the expanded intermodal center. Refer to Table ___ (*specify*). This increase in truck VMT and rail activity associated with the Build Alternatives would lead to higher MSAT emissions (particularly diesel particulate matter) in the vicinity of the intermodal center. The higher emissions could be offset somewhat by two factors: 1) the decrease in regional truck traffic due to increased use of rail for inbound and outbound freight; and 2) increased speeds on area highways due to the decrease in truck traffic. The extent to which these emissions decreases will offset intermodal center-related emissions increases is not known.

Because the estimated truck VMT and rail activity under each of the Build Alternatives are nearly the same, varying by less than ___ (*specify*) percent, it is expected there would be no appreciable difference in overall MSAT emissions among the various alternatives. Also, regardless of the alternative chosen, emissions will likely be lower than present levels in the design year as a result of EPA's national control programs that are projected to reduce annual MSAT emissions by over 80 percent from 2010 to 2050. Local conditions may differ from these national projections in terms of fleet mix and turnover, VMT growth rates, and local control measures. However, the EPA-projected reductions are so significant (even after accounting for VMT growth) that MSAT emissions in the study area are likely to be lower in the future as well.

(The following discussion may apply if the intermodal center is close to other development.)

The additional freight activity contemplated as part of the project alternatives will have the effect of increasing diesel emissions in the vicinity of nearby homes, schools, and businesses; therefore, under each alternative there may be localized areas where ambient concentrations of MSAT would be higher than under the No Build alternative. The localized differences in MSAT concentrations would likely be most pronounced under Alternatives _____ (*specify*). However, as discussed above, the magnitude and the duration of these potential differences cannot be reliably quantified due to incomplete or unavailable information in forecasting project-specific health impacts. Even though there may be differences among the Alternatives, on a region-wide basis, EPA's vehicle and fuel regulations, coupled with fleet turnover, will cause substantial reductions over time that in almost all cases the MSAT levels in the future will be significantly lower than today.

(Insert a description of any emissions-reduction activities that are associated with the project, such as truck and train idling limitations or technologies, such as auxiliary power units; alternative fuels or engine retrofits for container-handling equipment, etc.)

In sum, all Build Alternatives in the design year are expected to be associated with higher levels of MSAT emissions in the study area, relative to the No Build Alternative, along with some benefit from improvements in speeds and reductions in region-wide truck traffic. There also could be slightly higher differences in MSAT levels among Alternatives in a few localized areas where freight activity occurs closer to homes, schools, and businesses. Under all alternatives, MSAT levels are likely to decrease over time due to nationally mandated cleaner vehicles and fuels.

MSAT MITIGATION STRATEGIES

Although there is no obligation to identify and consider MSAT mitigation strategies as part of a qualitative analysis, such strategies may be part of a project's design. Refer to the examples provided in (4) Minor Improvements or Expansions to Intermodal Centers or Other Projects that Affect Truck Traffic, or Appendix E. For these and similar circumstances, MSAT mitigation strategies should be discussed as part of a qualitative analysis.

CEQ PROVISIONS COVERING INCOMPLETE OR UNAVAILABLE INFORMATION (40 CFR 1502.22)

The introductory language for qualitative analysis should be followed by a 40 CFR 1502 assessment of incomplete or unavailable information. Refer to Appendix C for details.

APPENDIX C – CEQ Provisions Covering Incomplete or Unavailable Information (40 CFR 1502.22)

Sec. 1502.22 INCOMPETE OR UNAVAILABLE INFORMATION

When an agency is evaluating reasonably foreseeable significant adverse effects on the human environment in an environmental impact statement and there is incomplete or unavailable information, the agency shall always make clear that such information is lacking.

(a) If the incomplete information relevant to reasonably foreseeable significant adverse impacts is essential to a reasoned choice among alternatives and the overall costs of obtaining it are not exorbitant, the agency shall include the information in the environmental impact statement.

(b) If the information relevant to reasonably foreseeable significant adverse impacts cannot be obtained because the overall costs of obtaining it are exorbitant or the means to obtain it are not known, the agency shall include within the environmental impact statement:

1. a statement that such information is incomplete or unavailable;
2. a statement of the relevance of the incomplete or unavailable information to evaluating reasonably foreseeable significant adverse impacts on the human environment;
3. a summary of existing credible scientific evidence which is relevant to evaluating the reasonably foreseeable significant adverse impacts on the human environment; and
4. the agency's evaluation of such impacts based upon theoretical approaches or research methods generally accepted in the scientific community. For the purposes of this section, "reasonably foreseeable" includes impacts that have catastrophic consequences, even if their probability of occurrence is low, provided that the analysis of the impacts is supported by credible scientific evidence, is not based on pure conjecture, and is within the rule of reason.

(c) The amended regulation will be applicable to all environmental impact statements for which a Notice to Intent (40 CFR 1508.22) is published in the Federal Register on or after May 27, 1986. For environmental impact statements in progress, agencies may choose to comply with the requirements of either the original or amended regulation.

INCOMPLETE OR UNAVAILABLE INFORMATION FOR PROJECT-SPECIFIC MSAT HEALTH IMPACTS ANALYSIS

In FHWA’s view, information is incomplete or unavailable to credibly predict the project-specific health impacts due to changes in MSAT emissions associated with a proposed set of highway alternatives. The outcome of such an assessment, adverse or not,

would be influenced more by the uncertainty introduced into the process through assumption and speculation rather than any genuine insight into the actual health impacts directly attributable to MSAT exposure associated with a proposed action.

The U.S. Environmental Protection Agency (EPA) is responsible for protecting the public health and welfare from any known or anticipated effect of an air pollutant. They are the lead authority for administering the Clean Air Act and its amendments and have specific statutory obligations with respect to hazardous air pollutants and MSAT. The EPA is in the continual process of assessing human health effects, exposures, and risks posed by air pollutants. They maintain the Integrated Risk Information System (IRIS), which is "a compilation of electronic reports on specific substances found in the environment and their potential to cause human health effects" (EPA, https://www.epa.gov/iris/). Each report contains assessments of non-cancerous and cancerous effects for individual compounds and quantitative estimates of risk levels from lifetime oral and inhalation exposures with uncertainty spanning perhaps an order of magnitude.

Other organizations are also active in the research and analyses of the human health effects of MSAT, including the Health Effects Institute (HEI). Two HEI studies are summarized in Appendix D of FHWA's Interim Guidance Update on Mobile source Air Toxic Analysis in NEPA Documents. Among the adverse health effects linked to MSAT compounds at high exposures are; cancer in humans in occupational settings; cancer in animals; and irritation to the respiratory tract, including the exacerbation of asthma. Less obvious is the adverse human health effects of MSAT compounds at current environmental concentrations (HEI, http://pubs.healtheffects.org/view.php?id=282) or in the future as vehicle emissions substantially decrease (HEI, http://pubs.healtheffects.org/view.php?id=306).

The methodologies for forecasting health impacts include emissions modeling; dispersion modeling; exposure modeling; and then final determination of health impacts – each step in the process building on the model predictions obtained in the previous step. All are encumbered by technical shortcomings or uncertain science that prevents a more complete differentiation of the MSAT health impacts among a set of project alternatives. These difficulties are magnified for lifetime (i.e., 70 year) assessments, particularly because unsupportable assumptions would have to be made regarding changes in travel patterns and vehicle technology (which affects emissions rates) over that time frame, since such information is unavailable.

It is particularly difficult to reliably forecast 70-year lifetime MSAT concentrations and exposure near roadways; to determine the portion of time that people are actually exposed at a specific location; and to establish the extent attributable to a proposed action, especially given that some of the information needed is unavailable.

There are considerable uncertainties associated with the existing estimates of toxicity of the various MSAT, because of factors such as low-dose extrapolation and translation of occupational exposure data to the general population, a concern expressed by HEI (http://pubs.healtheffects.org/view.php?id=282). As a result, there is no national

consensus on air dose-response values assumed to protect the public health and welfare for MSAT compounds, and in particular for diesel PM. The EPA (http://www.epa.gov/risk/basicinformation.htm#g) and the HEI (http://pubs.healtheffects.org/getfile.php?u=395) have not established a basis for quantitative risk assessment of diesel PM in ambient settings.

There is also the lack of a national consensus on an acceptable level of risk. The current context is the process used by the EPA as provided by the Clean Air Act to determine whether more stringent controls are required in order to provide an ample margin of safety to protect public health or to prevent an adverse environmental effect for industrial sources subject to the maximum achievable control technology standards, such as benzene emissions from refineries. The decision framework is a two-step process. The first step requires EPA to determine an "acceptable" level of risk due to emissions from a source, which is generally no greater than approximately 100 in a million. Additional factors are considered in the second step, the goal of which is to maximize the number of people with risks less than 1 in a million due to emissions from a source. The results of this statutory two-step process do not guarantee that cancer risks from exposure to air toxics are less than 1 in a million; in some cases, the residual risk determination could result in maximum individual cancer risks that are as high as approximately 100 in a million. In a June 2008 decision, the U.S. Court of Appeals for the District of Columbia Circuit upheld EPA's approach to addressing risk in its two step decision framework. Information is incomplete or unavailable to establish that even the largest of highway projects would result in levels of risk greater than deemed acceptable.

Because of the limitations in the methodologies for forecasting health impacts described, any predicted difference in health impacts between alternatives is likely to be much smaller than the uncertainties associated with predicting the impacts. Consequently, the results of such assessments would not be useful to decision makers, who would need to weigh this information against project benefits, such as reducing traffic congestion, accident rates, and fatalities plus improved access for emergency response, that are better suited for quantitative analysis.

Due to the limitations cited, a discussion such as the example provided in this Appendix (reflecting any local and project-specific circumstances), should be included regarding incomplete or unavailable information in accordance with Council on Environmental Quality (CEQ) regulations [40 CFR 1502.22(b)]. The FHWA Headquarters and Resource Center staff Victoria Martinez (787) 766-5600 X231, Bruce Bender (202) 366-2851, and Michael Claggett (505) 820-2047, are available to provide guidance and technical assistance and support.

APPENDIX D – FHWA Sponsored Mobile Source Air Toxics Research Efforts

Human epidemiology and animal toxicology experiments indicate that many chemicals or mixtures termed air toxics have the potential to impact human health. As toxicology, epidemiology and air contaminant measurement techniques have improved over the decades, scientists and regulators have increased their focus on the levels of each chemical or material in the air in an effort to link potential exposures with potential health effects. The EPA's list of 21 mobile source toxics represents their prioritization of these chemicals or materials for further study and evaluation. The EPA's strategy for evaluating air toxic compounds effects is focused on both national trends and local impacts. The FHWA has embarked on an air toxics research program with the intent of understanding the mobile source contribution and its impact on local and national air quality. Several of studies either initiated or supported by FHWA are described below[1].

Air toxics emissions from mobile sources have the potential to impact human health and often represent a regulatory agency concern. The FHWA has responded to this concern by developing an integrated research program to answer the most important transportation community questions related to air toxics, human health, and the NEPA process. To this end, FHWA has performed, funded or is currently managing several research projects. Many of these projects are based on an Air Toxics Research Workplan that provides a roadmap for agency research efforts[2]. These efforts include:

THE NATIONAL NEAR ROADWAY MSAT STUDY

The FHWA, in conjunction with the EPA and a consortium of State departments of transportation, studied the concentration and physical behavior of MSAT and mobile source PM 2.5 in Las Vegas, Nevada and Detroit, Michigan. The study criteria dictated that the study site be open to traffic and have 150,000 Annual Average Daily Traffic or more. These studies were intended to provide knowledge about the dispersion of MSAT emissions with the ultimate goal of enabling more informed transportation and environmental decisions at the project-level. These studies are unique in that the monitored data was collected for the entire year. The Las Vegas, NV report revealed there are a large number of influences in this urban setting and researchers must look beyond the roadway to find all the sources in the near road environment. Additionally, in Las Vegas, meteorology played a large role in the concentrations measured in the near road study area. More information is available at http://www.fhwa.dot.gov/environment/airtoxicmsat/index.htm.

[1] The information provided here is an update to research work discussed in the 2009 release of this interim guidance. The current title of each research activity is followed by the title used to describe the activity previously.
[2] Available at http://www.fhwa.dot.gov/environment/airtoxic/workplan/index.htm

TRAFFIC-RELATED AIR POLLUTION

Going One Step Beyond: A Neighborhood Scale Air Toxics Assessment in North Denver (The Good Neighbor Project)

In 2007, the Denver Department of Environmental Health (DDEH) issued a technical report entitled *Going One Step Beyond: A Neighborhood Scale Air Toxics Assessment in North Denver (The Good Neighbor Project)***.** This research project was funded by FHWA. In this study, DDEH conducted a neighborhood-scale air toxics assessment in North Denver, which includes a portion of the proposed I-70 East project area. Residents in this area have been very concerned about both existing health effects in their neighborhoods (from industrial activities, hazardous waste sites, and traffic) and potential health impacts from changes to I-70.

The study was designed to compare modeled levels of the six priority MSATs identified in FHWA's 2006 guidance with measurements at existing MSAT monitoring sites in the study area. MOBILE6.2 emissions factors and the ISC3ST dispersion model were used (some limited testing of the CALPUFF model was also performed). Key findings include: 1) modeled mean annual concentrations from highways were well below estimated Integrated Risk Information System (IRIS) cancer and non-cancer risk values for all six MSAT; 2) modeled concentrations dropped off sharply within 50 meters of roadways; 3) modeled MSAT concentrations tended to be higher along highways near the Denver Central Business District (CBD) than along the I-70 East corridor (in some cases, they were higher within the CBD itself, as were the monitored values); and 4) dispersion model results were generally lower than monitored concentrations but within a factor of two at all locations.

Mobile Source Air Toxic Hot Spot

Given concerns about the possibility of MSAT exposure in the near road environment, The Health Effects Institute (HEI) dedicated a number of research efforts at trying to find a MSAT "hotspot." In 2011 three studies were published that tested this hypothesis. In general the authors confirm that while highways are a source of air toxics, they were unable to find that highways were the only source of these pollutants and determined that near road exposures were often no different or no higher than background or ambient levels of exposure, and hence no true hot spots were identified. These links provide additional information http://pubs.healtheffects.org/getfile.php?u=659 page 137, http://pubs.healtheffects.org/getfile.php?u=656 page 143, and http://pubs.healtheffects.org/getfile.php?u=617 page 87, where monitored on-road emissions were higher than emission levels monitored near road residences, but the issue of hot spot was not ultimately discussed.

Traffic-Related Air Pollution: A Critical Review of the Literature on Emissions, Exposure, and Health Effects

In January 2010, HEI released Special Report #17, investigating the health effects of traffic related air pollution. The goal of the research was to synthesize available information on the effects of traffic on health. Researchers looked at linkages between: (1) traffic emissions (at the tailpipe) with ambient air pollution in general, (2) concentrations of ambient pollutants with human exposure to pollutants from traffic, (3) exposure to pollutants from traffic with human-health effects and toxicologic data, and (4) toxicologic data with epidemiological associations. Challenges in making exposure assessments, such as quality and quantity of emissions data and models, were investigated, as was the appropriateness of the use of proximity as an exposure-assessment model. Overall, researchers felt that there was "sufficient" evidence for causality for the exacerbation of asthma. Evidence was "suggestive but not sufficient" for other health outcomes such as cardiovascular mortality and others. Study authors also note that past epidemiologic studies may not provide an appropriate assessment of future health associations as vehicle emissions are decreasing overtime. The report is available from HEI's website at http://www.healtheffects.org/. The FHWA provides financial support to HEI's research work.

HEI SPECIAL REPORT #16

In November 2007, the HEI published Special Report #16: Mobile-Source Air Toxics: A Critical Review of the Literature on Exposure and Health Effects. The purpose of this Report was to accomplish the following tasks:

- Use information from the peer-reviewed literature to summarize the health effects of exposure to the 21 MSATs defined by the EPA in 2001;
- Critically analyze the literature for a subset of priority MSAT; and
- Identify and summarize key gaps in existing research and unresolved questions about the priority MSAT.

The HEI chose to review literature for acetaldehyde, acrolein, benzene, 1,3-butadiene, formaldehyde, naphthalene, and polycyclic organic matter (POM). Diesel exhaust was included, but not reviewed in this study since it had been reviewed by HEI and EPA recently. In general, the Report concluded that the cancer health effects due to mobile sources are difficult to discern since the majority of quantitative assessments are derived from occupational cohorts with high concentration exposures and some cancer potency estimates are derived from animal models. The Report suggested that substantial improvements in analytical sensitively and specificity of biomarkers would provide better linkages between exposure and health effects. Noncancer endpoints were not a central focus of most research, and therefore require further investigation. Subpopulation susceptibility also requires additional evaluation. The study is available from HEI's website at http://www.healtheffects.org/.

KANSAS CITY PM CHARACTERIZATION STUDY (KANSAS CITY STUDY)

This study was initiated by EPA to conduct exhaust emissions testing on 480 light-duty, gasoline vehicles in the Kansas City Metropolitan Area (KCMA). Major goals of the study included characterizing PM emissions distributions of a sample of gasoline vehicles in Kansas City; characterizing gaseous and PM toxics exhaust emissions; and characterizing the fraction of high emitters in the fleet. In the process, sampling methodologies were evaluated. Overall, results from the study were used to populate databases for the MOVES emissions model. The FHWA was one of the research sponsors. This study is available on EPA's website at: http://www.epa.gov/otaq/emission-factors-research/420r08009.pdf

ESTIMATING THE TRANSPORTATION CONTRIBUTION TO PARTICULATE MATTER POLLUTION (AIR TOXICS SUPERSITE STUDY)

The purpose of this study was to improve understanding of the role of highway transportation sources in particulate matter (PM) pollution. In particular, it was important to examine uncertainties, such as the effects of the spatial and temporal distribution of travel patterns, consequences of vehicle fleet mix and fuel type, the contribution of vehicle speed and operating characteristics, and influences of geography and weather. The fundamental methodology of the study was to combine EPA research-grade air quality monitoring data in a representative sample of metropolitan areas with traffic data collected by State departments of transportation (DOTs) and local governments.

Phase I of the study, the planning and data evaluation stage, assessed the characteristics of EPA's ambient PM monitoring initiatives and recruited State DOTs and local government to participate in the research. After evaluating and selecting potential metropolitan areas based on the quality of PM and traffic monitoring data, nine cities were selected to participate in Phase II. The goal of Phase II was to determine whether correlations could be observed between traffic on highway facilities and ambient PM concentrations. The Phase I report was published in September 2002. Phase II included the collection of traffic and air quality data and data analysis. Ultimately, six cities participated: New York City (Queens), Baltimore, Pittsburgh, Atlanta, Detroit and Los Angeles.

In Phase II, air quality and traffic data were collected. The air quality data was obtained from EPA AIRS AQS system, Supersite personnel, and NARSTO data archive site. Traffic data included ITS (roadway surveillance), Coverage Counts (routine traffic monitoring) and Supplemental Counts (specifically for research project). Analyses resulted in the conclusion that only a weak correlation existed between PM2.5 concentrations and traffic activity for several of the sites. The existence of general trends indicates a relationship, which however is primarily unquantifiable. Limitations of the study include the assumption that traffic sources are close enough to ambient monitors to provide sufficiently strong source strength, that vehicle activity is an appropriate surrogate for mobile emissions, and lack of knowledge of other factors such as non-traffic

sources of PM and its precursors. A paper documenting the work of Phase II was presented at the 2004 Emissions Inventory Conference and is available at http://www.epa.gov/ttn/chief/conference/ei13/mobile/black.pdf.

APPENDIX E – MSAT Mitigation Strategies

Lessening the effects of mobile source air toxics should be considered for projects with substantial construction-related MSAT emissions that are likely to occur over an extended building period, and for post-construction scenarios where the NEPA analysis indicates potentially meaningful MSAT levels. Such mitigation efforts should be evaluated based on the circumstances associated with individual projects, and they may not be appropriate in all cases. However, there are a number of available mitigation strategies and solutions for countering the effects of MSAT emissions.

Mitigating for Construction MSAT Emissions

Construction activity may generate a temporary increase in MSAT emissions. Project-level assessments that render a decision to pursue construction emission mitigation will benefit from a number of technologies and operational practices that should help lower short-term MSAT. In addition, the Federal Highway Administration has supported a host of diesel retrofit technologies in the Congestion Mitigation and Air Quality Improvement (CMAQ) Program provisions – technologies that are designed to lessen a number of MSATs.[1]

Construction mitigation includes strategies that reduce engine activity or reduce emissions per unit of operating time, such as reducing the numbers of trips and extended idling. Operational agreements that reduce or redirect work or shift times to avoid community exposures can have positive benefits when sites are near populated areas. For example, agreements that stress work activity outside normal hours of an adjacent school campus would be operations-oriented mitigation. Verified emissions control technology retrofits or fleet modernization of engines for construction equipment could be appropriate mitigation strategies. Technology retrofits could include particulate matter traps, oxidation catalysts, and other devices that provide an after-treatment of exhaust emissions. Implementing maintenance programs per manufacturers' specifications to ensure engines perform at EPA certification levels, as applicable, and to ensure retrofit technologies perform at verified standards, as applicable, could also be deemed appropriate. The use of clean fuels, such as ultra-low sulfur diesel, biodiesel, or natural gas also can be a very cost-beneficial strategy.

The EPA has listed a number of approved diesel retrofit technologies; many of these can be deployed as emissions mitigation measures for equipment used in construction. This listing can be found at: www.epa.gov/otaq/retrofit/index.htm.

Post-Construction Mitigation for Projects with Potentially Significant MSAT Levels

Travel demand management strategies and techniques that reduce overall vehicle-mile of travel; reduce a particular type of travel, such as long-haul freight or commuter travel; or improve the transportation system's efficiency will mitigate MSAT emissions. Examples of such strategies include congestion pricing, commuter incentive programs, and increases in truck weight or length limits. Operational strategies that focus on speed limit

enforcement or traffic management policies may help reduce MSAT emissions even beyond the benefits of fleet turnover. Well-traveled highways with high proportions of heavy-duty diesel truck activity may benefit from active Intelligent Transportation System programs, such as traffic management centers or incident management systems. Similarly, anti-idling strategies, such as truck-stop electrification can complement projects that focus on new or increased freight activity.

Planners also may want to consider the benefits of establishing buffer zones between new or expanded highway alignments and populated areas. Modifications of local zoning or the development of guidelines that are more protective also may be useful in separating emissions and receptors.

The initial decision to pursue MSAT emissions mitigation should be the result of interagency consultation at the earliest juncture. Options available to project sponsors should be identified through careful information gathering and the required level of deliberation to assure an effective course of action. Such options may include local programs, whether voluntary or with incentives, to replace or rebuild older diesel engines with updated emissions controls. Information on EPA diesel collaborative around the country can be found at http://www.epa.gov/otaq/diesel/whereyoulive.htm.

---

[1] http://www.fhwa.dot.gov/environment/air_quality/cmaq/policy_and_guidance/2008_guidance/index.cfm